
SB16 | SHOEBOX LIGHT

Project:_____ Type:_____

Name:_____ Date:_____









CCT	Model	Watts	Lumens
11475/11325: 3000K/4000K 5000K	11475/ 11516	100	13,500lm-14,500lm
		120	16,200lm-17,400lm
		150	20,250lm-23,100lm
11516: 3000K/4300/ K5000K	11325	200	27,000lm - 29,000lm
		240	32,400lm - 34,800lm
		300	40,500lm - 43,500lm
5700K	11326/11353(WH) 11480	300	42,000lm - 45,000lm
	11327 (480V)	300	42,000lm - 45,000lm
	11369-S	450	58,500lm - 65,250lm

Size	See Dimensions	**Lumens**	See Above
Voltage	120-277V 277-480V	**IP Rating**	IP65
Dimming	0-10V	**Materials**	Die-Cast Aluminum
Beam Angle	155*90° Type III	**Finish**	Bronze (available in white)
CRI	>80	**Lens**	Clear
PF	≥ 0.9	**Lifespan**	50,000 Hours

SARIN LED Shoebox Lights are commonly used to replace high-pressure sodium and metal halide lights to provide energy savings of up to 70%. These area lights are safe for outdoor use and are protected from rain, snow, and weak jets of water, such as sprinklers.

Shoebox Lights are perfect for stadiums, parks, billboards, parking lots, and office buildings. An optional photocell sensor allows the light to automatically activate at night. This fixture turns on and off instantly without flickering or humming. The lens has a glare-reduction composition that softens the light and makes it more uniform and safe to the eye. This Dark Sky compliant light eliminates glare and prevents light pollution.*

OVERVIEW

CCT: Tunable, 5700K
Applications: IP65
Efficacy: 135-145, 140-150lm/W
Dimming: 0-10V
LED Type: Lumileds 2835
Lens Type: Clear
Operating Temp: -13°F to 113°F
Operating Humidity: 5% - 95% RH
Lifespan: 50,000 Hours
Warranty: 5 Years

FEATURES

- 10KV Surge Protector pre-installed
- Five Mounting Options: Slip Fitter, Extruded Mount, Yoke Mount, Large-C Mount, Universal Bracket
- Optional Accessories: Photocell, Surge protector, Shield, Motion Sensor

c UL us LISTED

*Dark Sky compliance at 3000K

©2026


SARIN ENERGY SOLUTIONS


SB16 | SHOEBOX LIGHT


Project:_____ Type:_____


Name:_____ Date:_____

PHOTOMETRICS:

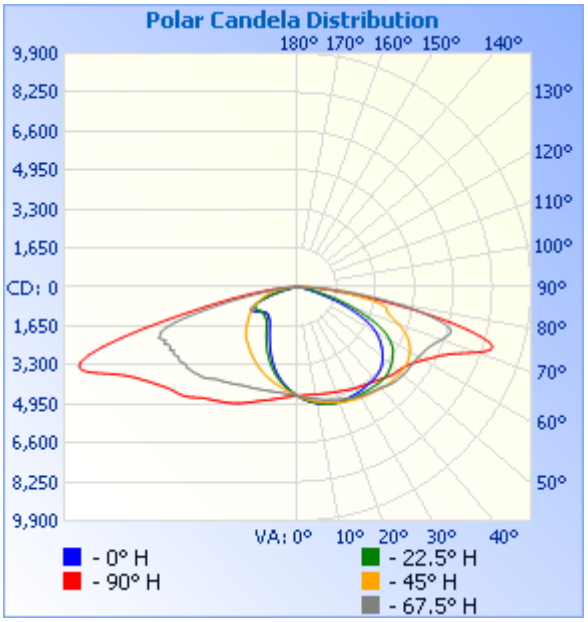

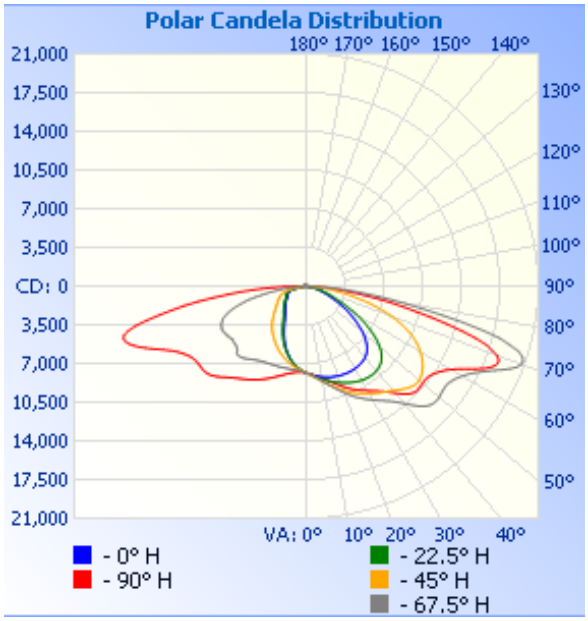

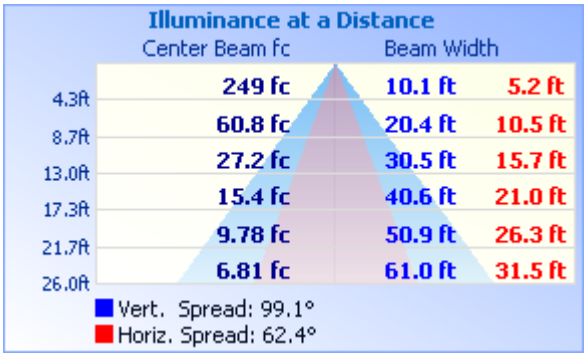

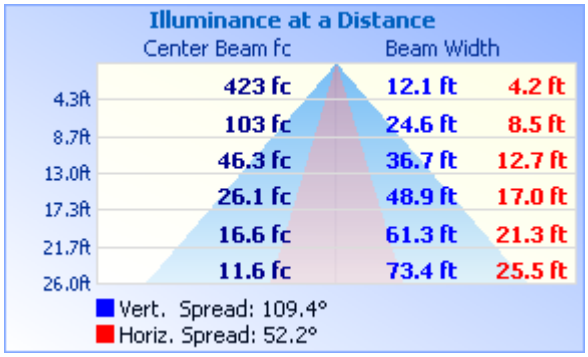

SB16 | SHOEBOX LIGHT


Project:_____ Type:_____

Name:_____ Date:_____


DIMENSIONS:

150W


Adjustable Mount

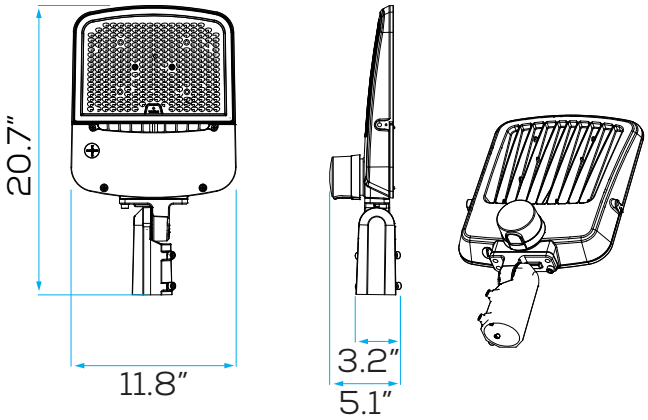


2-in-1 Mount

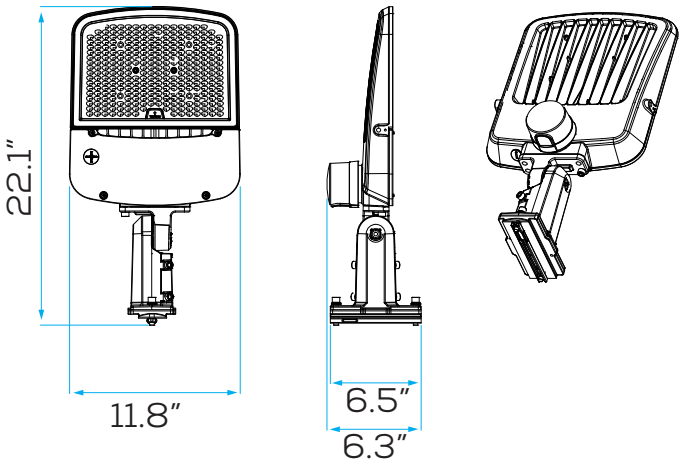

Yoke Mount

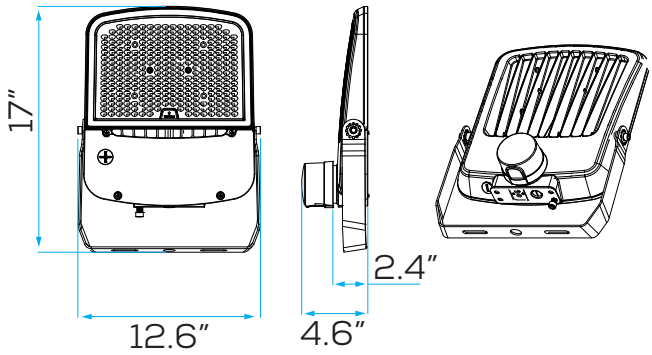

Extruded Arm

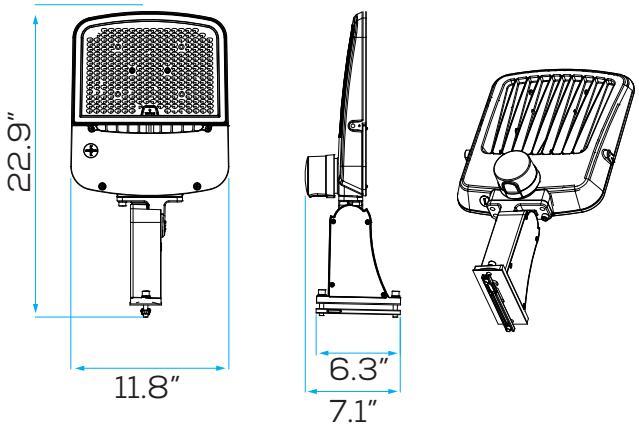

SB16 | SHOEBOX LIGHT


Project:_____ Type:_____

Name:_____ Date:_____


DIMENSIONS:

300W


Adjustable Mount

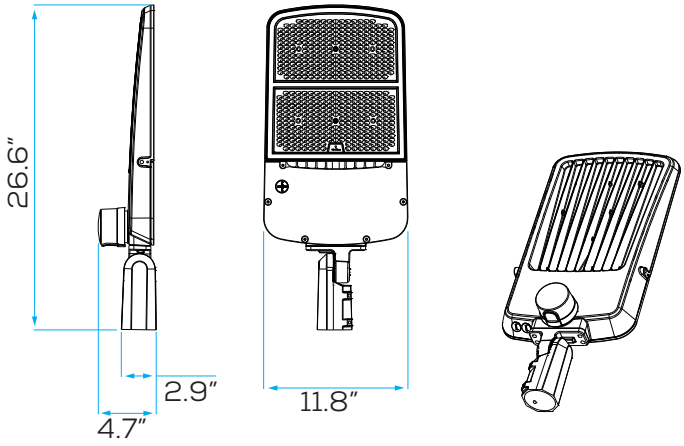


2-in-1 Mount

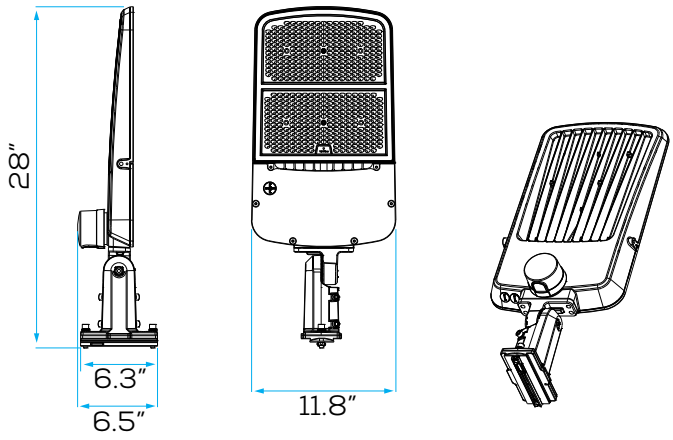

Yoke Mount

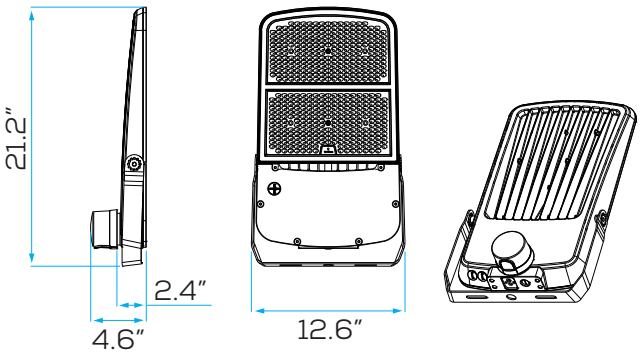

Extruded Mount

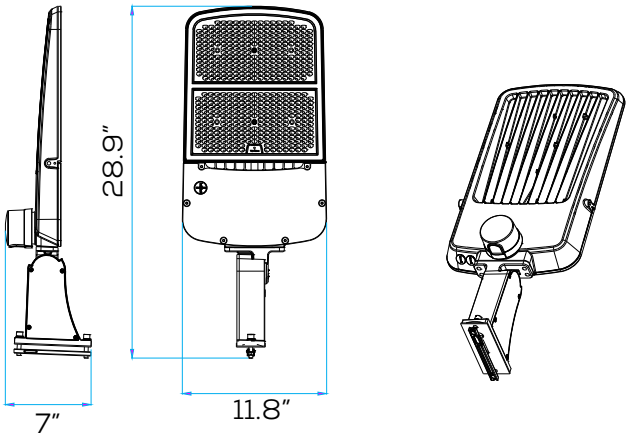

SB16 | SHOEBOX LIGHT

Project:_____ Type:_____

Name:_____ Date:_____

ORDER FORM:

(*) Special Order/Not Commonly Stocked

Custom Model Assembly

Fixture	CCT	Watts	Beam Angle	Voltage
☑ SB16	☐ Tunable	☐ 300W	☑ Type III	☐ 120-277V
	☐ 5700K	☐ 450W		☐ 277-480V
		☐ 100/120/150W		
		☐ 200/240300W		

SES-SB16-CCT-15/12/10
Example Model Number

SES – **SB16** – ____ – ____ – **Type III** –

Quantity		Fixture	CCT	Watts	Beam Angle	Voltage

Common Stock Models:

Item #	Model #
11475	SES-SB16-CCT-15/12/10
11325	SES-SB16-CCT-30/24/20
11326	SES-SB16-5700-300W
11327	SES-SB16-5700-300W-480V
11369-S	SES-SB16-5700-450-SF
11353	SES-SB16-5700-300W-WH
11480	SES-SB16-5700-300-SF
11516	SES-SB16-CCT-15/20/10



Slip Fitter



Extruded Arm



Sheild



Large Yoke



Photocell

Optional Accessories:

Item #	Model #	QTY:
11415	SES-SB16-PHOTOCELL	
11325-A	SES-SB16&SB14-SLIP-FITTER-BRONZE	
11325-B	SES-SB16&SB14-EXTRUDED-BRONZE	
11325-C	SES-SB16&SB14-SLIP-FITTER-WHITE	
11325-D	SES-SB16&SB14-EXTRUDED-WHITE	
11325-E	SES-SB16-150W-LARGE-YOKE-BRONZE	
11325-F	SES-SB16-300W-LARGE-YOKE-BRONZE	
11325-I	SB16-TYPE4-150W-LENS	
11325-J	SB16-TYPE5-150W-LENS	
11325-K	SB16-TYPE4-300W-LENS	
11325-L	SB16-TYPE5-300W-LENS	
11325-M	SES-SB16-SHEILD-100300	
11370	SES-SB16-BRACKET	

©2026