ML02

48"x 36" Crystal LED Mirror Light

Project: _____ Type: _____

Name: _____ Date: _____





OVERVIEW

CCT: 3000K-4500K-6500K
IP Rating: Wet Location (IP44)
Efficacy: 100-102 lm/w
Dimming: Touch Dimming
LED Type: SMD 2835
Lens Type: Crystal
Operating Temp: 5° to 104° F
Operating Humidity: 20%-90% RH
Heater: Automatic Anti-Fog
Lifespan: 50,000 Hours
Warranty:
- 5 Years for Mirror & Frame
- 2 Years for Electronic Components

Size	36" x 48"	**Lumen**	8,700lm-8,874lm
Wattage	87W	**CCT**	3000K-4500K-6500K
Voltage	120V	**IP Rating**	Wet Location (IP44)
Dimming	Touch Dimmer	**Materials**	Aluminum
Beam Angle	120°	**Finish**	White
CRI	90	**Lens**	Crystal
PF	≤0.6	**Lifespan**	50,000 Hours

SARIN LED Adjustable CCT Mirror Lights are widely used as a functional decoration for restrooms in residential and commercial spaces.

A heater behind the glass to prevents fog. The mounting plate allows for vertical or horizontal installation. Available with a frosted lens, this mirror can switch between three color temperatures,accessible through a switch on the side of the unit.

FEATURES


- Selectable Color Temperature
- Automatic Defogger
- Copper-Free, Anti-Corrosion
- Touch On/Off
- Sensor or hardwire connection
- Safety-Backed, Anti -Shatter
- Crystal Lens
- Easy Rotatable Installation
- High Energy Efficiency

ML02 | 48"x 36" Crystal LED Mirror Light

Project: _____ Type: _____

Name: _____ Date: _____

DIMENSIONS:

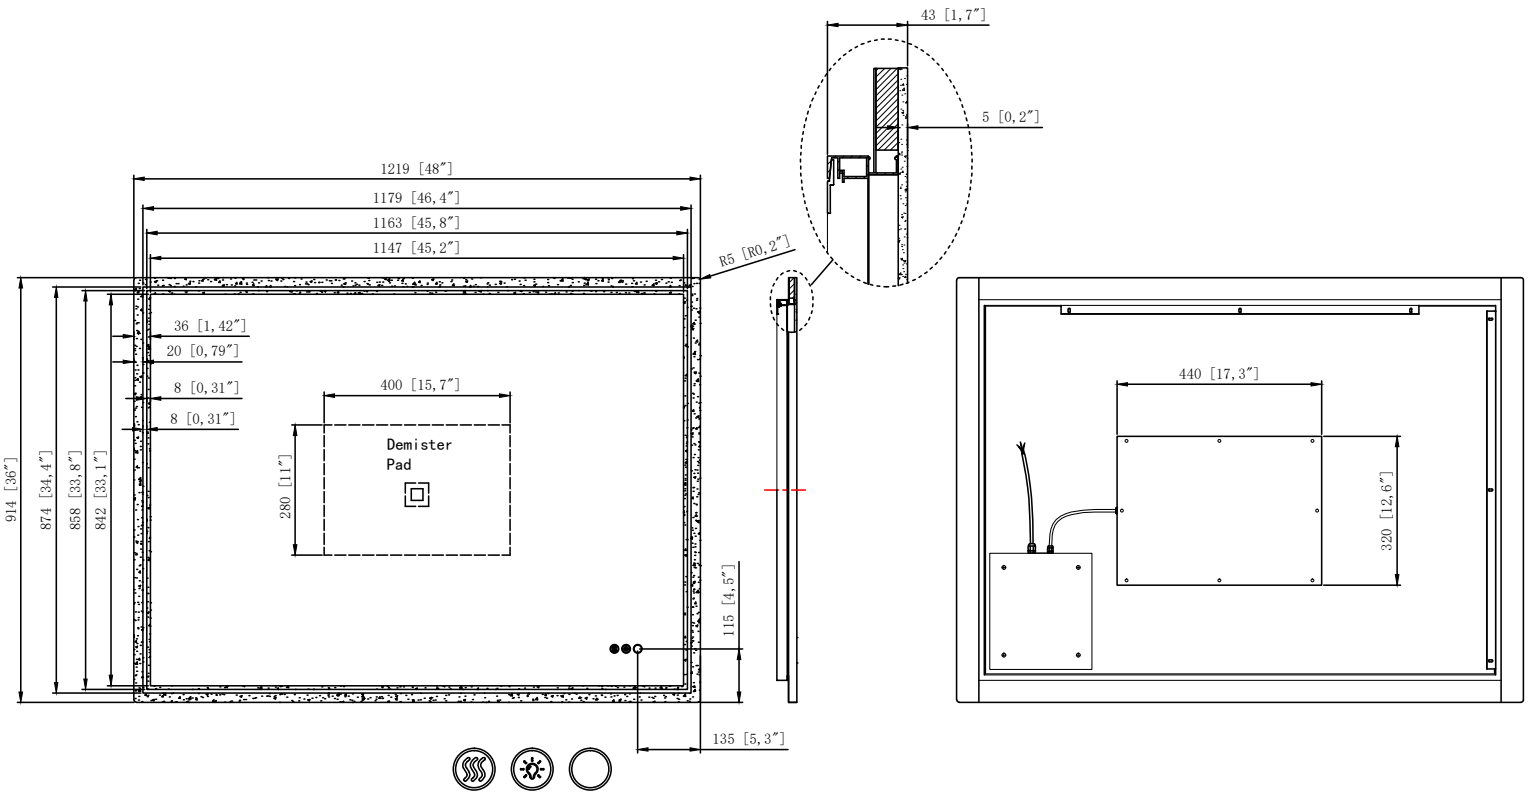

ML02 | 48"x 36" Crystal LED Mirror Light

Project: _____ Type: _____


Name: _____ Date: _____

INSTALLATION INSTRUCTIONS:

PLEASE READ THESE INSTRUCTIONS CAREFULLY AND SAVE THEM, AS YOU MAY NEED THEM AT A LATER DATE.

WARNING: Failure to install and wire fixture in accordance with the National Electrical Codes (NEC), all applicable Federal, State and Local electrical codes, as well as Specific U.L. safety standards for the intended working environment (location/application) may cause serious personal injury death and/or property damage.This product must be installed by a person familiar with the construction and operation of the product and the hazards involved.

CAUTION: TURN OFF POWER FROM THE MAIN CIRCUIT BEFORE INSTALLING FIXTURE. Make sure fixture is grounded per National Electrical Codes (NEC).This fixture is suitable for damp locations.

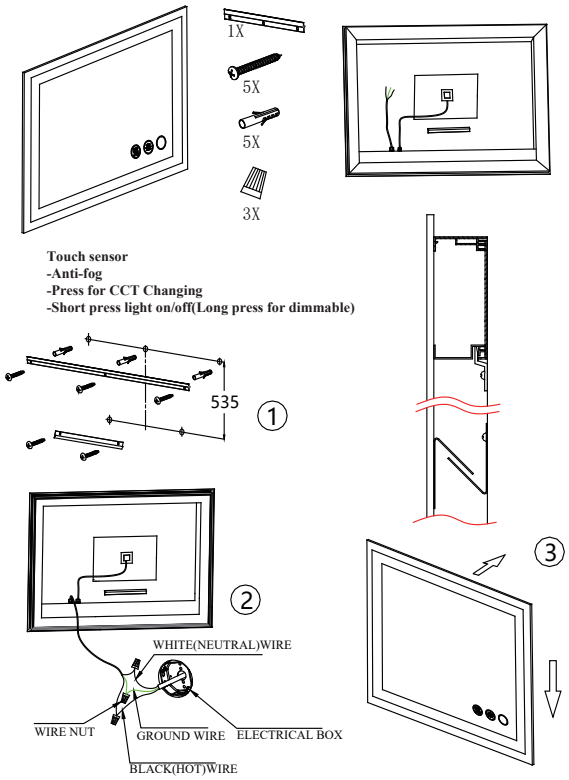

ITEM	W	H
11467	48"	36"

Important Note: The safeguards and instructions appearing in this page, are not meant to cover all possible conditions and situations that may occur. It may be understood that common sense, cautions and care are factors, which cannot be built into any product.The person(s) installing,operation and responsible for the light fixture, must execute these factors.

WARNING: For 120V 60Hz use only.Risk of fire and electrical shock, most dwellings built before 1985 have supply wires rated 60℃ Consult a qualified electrician before installing. If supply wires are located within 3 inchs of the ballast, use wires rated at least 90℃.

TURN OFF POWER FROM THE MAIN CIRCUIT BEFORE INSTALLING FIXTURE.

INSTALLATION STEPS

1. Tools and material needed: screwdriver, pliers,pencil, tape, wire nuts,hammer, electrical tape,8mm drill.
2. To help prevent the possibility of electrical shock, the use of rubber sole shoes is recommended.
3. Exercise care when handling the fixture to avoid cuts or abrasions.
4. If a ladder is needed, make sure to use a sturdy wooden one
5. Locate screw location according the mounting plate. for each mirror,drill holes, use hammer taping the anchoring (5X5 pieces included) all over into the wall. Screw the mounting plate onto the wall,hook the mirror onto the mounting plate.
6. Electrical connection: Make sure electricity to the circuit is turned off. Connect green/or bare copper wire to Ground screw (Ground must be properly installed or unit may not work). Connect white wire to white supply wire cover with nut/or twist together and cover really well with electrical tape. Connect black wire supply wire cover with a wire nut/ or twist together and cover really well with the electrical tape. Tuck all connections neatly into the electrical box.
7. Align the mirror backside holder onto the mounting plate so that the mirror body parallel to the wall.
8. Make sure your mirror light is fixed properly on the wall,turn power on.

Thank you for purchasing our LED Mirror!

ML02

48”x 36” Crystal LED Mirror Light

Project: _____ Type: _____

Name: _____ Date: _____

Fixture	Size	CCT	Watts	Edge
☑ ML02	☑ 36”x48”	☑ 3000K	☑ 78W	☑ Crystal

SES-ML02-4836-CCT-78-CT
Example Model Number

Quantity	SES	–	ML02	–	4836	–	CCT	–	78	–	CT
			Fixture		Size		CCT		Watts		Finish

Common Stock Models:

Item #	Model #
11467	SES-ML02-4836-CCT-78-CT

©2026