




UDWP01C

CCT ADJUSTABLE WALL SCONCE UP DOWN

Project: _____ Type: _____

Name: _____ Date: _____

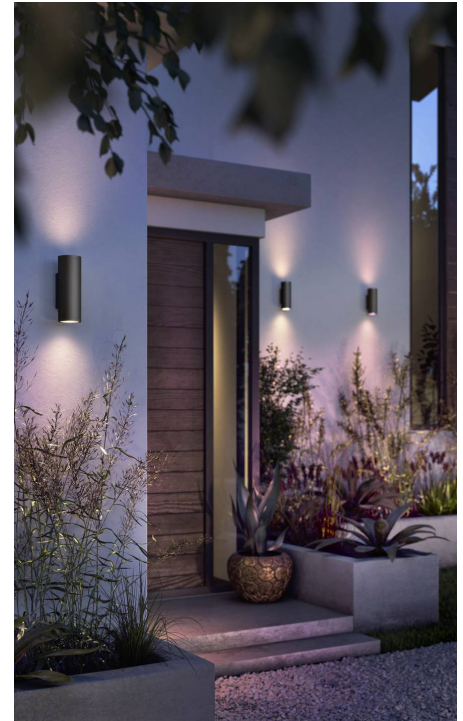

Size	14.17" x 4.72" x 5.83"	Lumens	7,920lm @4000K 8538lm-10787lm
Watts	36W/55W/72W	CCT	3000K+4000K+5000K
Voltage	120-277V	IP Rating	IP65
Dimming	0-10V	Materials	Aluminum, Glass, PC lens
Beam Angle	25°	Finish	Black
CRI	>80	Lens	Clear
PF	0.9	Lifespan	50,000 Hours

OVERVIEW

CCT: 3000K+4000K+5000K

Applications: IP65

Efficacy: 110-150lm/W

Dimming: 0-10V

LED Type: COB

Lens Type: Clear

Driver: HB-FL19F080B

Operating Temp: -31F° to 122F°

Operating Humidity: 10%-65% RH

Lifespan: 50,000 Hours

Warranty: 5 Years

FEATURES

- Protected from the elements with an IP65 rating, making it suitable for rainy environments
- 5-Year Warranty, rated to last up to 50,000 hours



SARIN LED Up-Down Wall Lights are excellent for adding lighting to any wall. Modernize the exterior lighting of your residential or commercial space with this sleek looking LED wall sconce. Constructed of rugged, aluminum, this outdoor wall wash light is durable and suitable for wet locations to withstand the elements.

LED Up-Down Wall Lights include a built-in photocell, making them perfect for LED Up-Down Wall Lights are perfect for hotels, shopping centers, and hospitals.




UDWP01C

CCT ADJUSTABLE
WALL SCONCE UP
DOWN


Project: _____ Type: _____

Name: _____ Date: _____

DIMENSIONS:

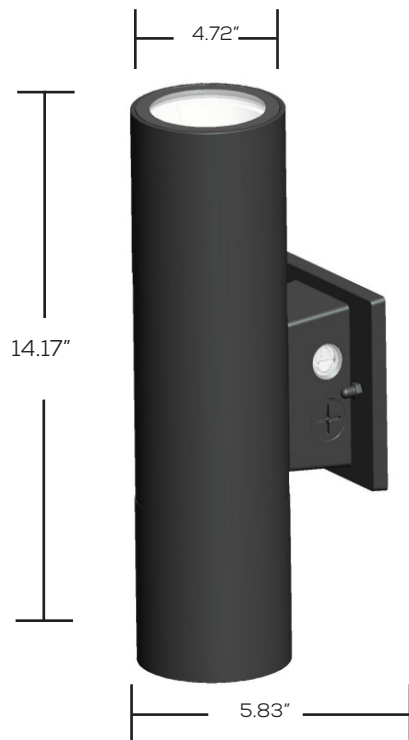

PHOTOMETRICS:

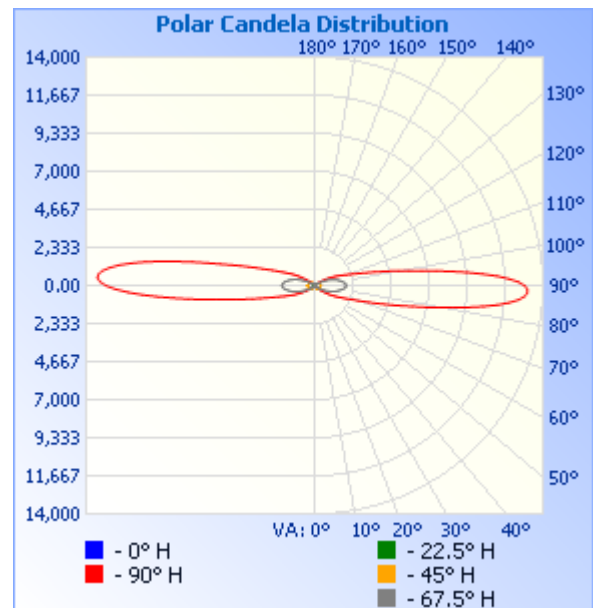

Illuminance at a Distance

	Center Beam fc	Beam Width
2.5ft	0.12 fc	5.0 ft 0.4 ft
5.0ft	0.03 fc	10.0 ft 0.8 ft
7.5ft	0.01 fc	15.0 ft 1.2 ft
10.0ft	0.007 fc	20.0 ft 1.6 ft
12.5ft	0.005 fc	25.0 ft 2.0 ft
15.0ft	0.003 fc	30.0 ft 2.4 ft

■ Vert. Spread: 90.0°
■ Horiz. Spread: 9.1°



UDWP01C

**CCT ADJUSTABLE
WALL SCONCE UP
DOWN**

Project: _____ Type: _____

Name: _____ Date: _____

INSTRUCTIONS**Wall Sconce installation instructions****Applications:**

Tunnel (except for motor vehicle tunnel), workshop, warehouse, factory, house, building exterior, etc.


Cautions:

1. Do not use an electric generator to test the LED fixture;
2. Please abide by appropriate national, regional and local law and regulations when install this fixture;
3. Do not install the fixture when raining to lower the risk of electric shock and avoid failure.

Cautions:

1. To avoid possibility of electrical shock or fire, the installation personnel must have professional electric knowledge;
2. Wear gloves to avoid injury before installation;
3. If any smoke or spark of the wire happened, please turn off the power immediately and notify relevant personnel;
4. This fixture is available in outdoor usage, but the distance from fixture to ground should be more than 2m.


Note: Please turn off the power before adjusting the color temperature.
This installation instruction applies to the following products. Although the products vary in appearance, the installation steps are the same:

**Installation procedure:**


1. Turn off the power.




2. Use tools to unscrew both sides and remove mounting plates.




3. Fix the mounting plate to the junction box with the screwdriver



4. Connect the wires properly




5. Lock the two end cap screws, the product is installed.



6. Make sure the installation is complete before turning on the power switch.



Operate as following instructions if the product is designed with below functions
SPECIAL FUNCTIONS INSTRUCTION



Note: Please turn off the power and colour before adjusting the wattage and CCT.
CCT adjustable instruction fixture;

1. The color temperature of the lamp turns to 3000K when the switch is set to 3000K;
2. The color temperature of the lamp turns to 4000K when the switch is set to 4000K;
3. The color temperature of the lamp turns to 5000K when the switch is set to 5000K;

Wattage adjustable instruction

Turn the wattage adjustable knob to a certain wattage gear, the power of the lamp will change to the corresponding wattage.
Adjustable wattage range 25%-100%.



UDWP01C

CCT ADJUSTABLE
WALL SCONCE UP
DOWN

Project: _____ Type: _____

Name: _____ Date: _____

ORDER FORM:

(*) Special Order/Not Commonly Stocked

Custom Model Assembly

	Fixture	CCT	Watts	Beam Angle	Voltage
<u>SES-UDWP01C-CCT-72-25</u> Example Model Number	☒ UDWP01C	☒ 3000K	☒ 36W	☒ 25°	☒ 120-277V
		☒ 4000K	☒ 55W		
		☒ 5000K	☒ 72W		
_____	SES — UDWP01C —	CCT —	Selectable —	25° —	120-277V
Quantity	Fixture	CCT	Watts	Beam Angle	Voltage

Common Stock Models:

Item #	Model #
11481	SES-UDWP01C-CCT-72-25