# FP66 | FRAMED DOWNLIGHT - SQUARES

Project:_____ Type:_____

Name:_____ Date:_____

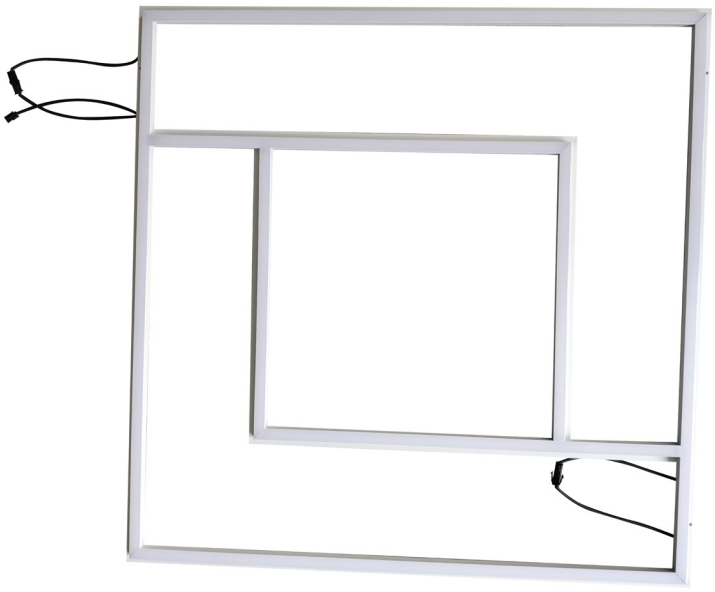



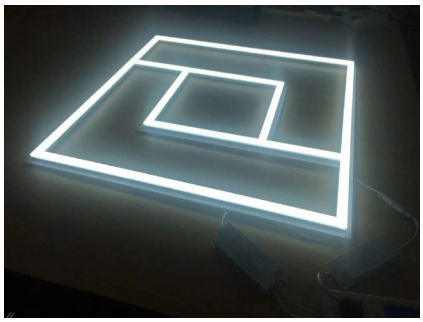

| | |
|---|---|
| **Size** | 23.7" x 23.7" x .8" |
| **Wattage** | 50W |
| **Voltage** | 120-277V |
| **Dimming** | N/A |
| **Beam Angle** | 120° |
| **CRI** | 80 |
| **PF** | 0.9 |

| | |
|---|---|
| **Lumens** | 5,000-5,500lm |
| **CCT** | 6000K |
| **IP Rating** | IP20 |
| **Materials** | Aluminum, PC |
| **Finish** | White |
| **Lens** | Frosted |
| **Lifespan** | 35,000 Hours |

## OVERVIEW

**CCT:** 6000K

**Applications:** IP20

**Efficacy:** 100-110lm/W

**Lens Type:** Frosted

**Driver:** Internal driver

**Operating Temp:** -40° to 113° F

**Operating Humidity:** 10-65% RH

**Lifespan:** 35,000 Hours

**Warranty:** 3 Years

SARIN's LED Framed Lights are specially designed to install quickly and easily into T-bar ceiling grids. These fashionable lights are an excellent replacement for fluorescent lights and can provide an energy savings of up to 60%. They are intended only for indoor use. These lights are perfect for offices, schools, places of worship, and hospitals. Add a touch of style without sacrificing efficiency or breaking the bank with SARIN's LED Framed Lights!

## FEATURES

- Designer Patterns
- High Lumen Output

# FP66 | FRAMED DOWNLIGHT - SQUARES

Project:_____ Type:_____

Name:_____ Date:_____

## ORDER FORM:

(*) Special Order/Not Commonly Stocked

### Custom Model Assembly

| Fixture | CCT | Watts | Beam Angle | Voltage |
|---|---|---|---|---|
| ☑ FP66 | ☑ 6000K | ☑ 50W | ☑ 120° | ☑ 100-277V |

SES-FP66-1-6000-50
Example Model Number

| Quantity | SES | – | FP66 | – | 6000 | – | 50 | – | 120° | – | 100-277V |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Fixture | | CCT | | Watts | | Beam Angle | | Voltage |

## Common Stock Models:

| Item # | Model # |
|---|---|
| 11486 | SES-FP66-1-6000-50 |


©2025