

ITEM | 3X3 DESIGNER DOWNLIGHT FIXTURE

Project:_____ Type:_____

Name:_____ Date:_____

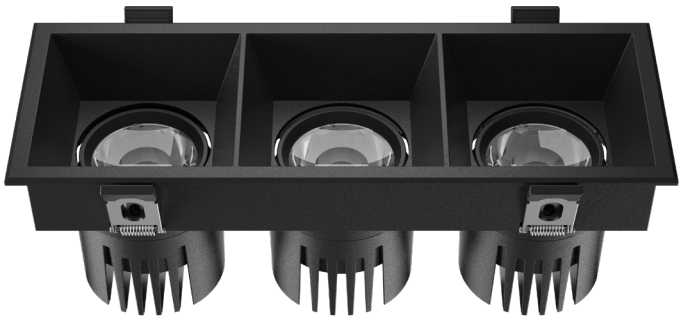

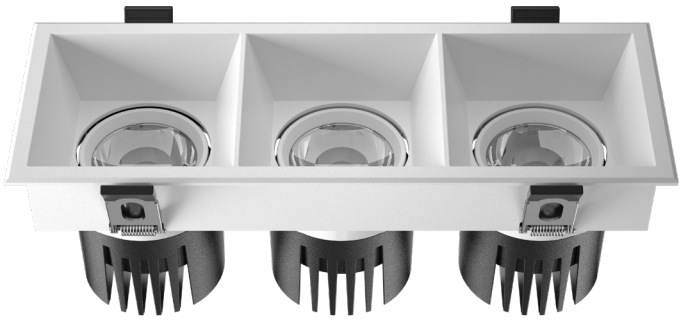

Size	4.5" x 4.2"
Watts	36
Voltage	120V
Dimming	Switch
Beam Angle	120°
CRI	>90
PF	≥ 0.9

Lumens	2700 lm
CCT	2700K, 3000K, 3500K, 4000K, 5000K
IP Rating	IP44
Materials	Aluminum, PMMA
Finish	Black / White
Lens	Clear
Lifespan	50,000 Hours

The 3 Light Downlight fixture is designed to deliver powerful, efficient illumination in a compact, low-profile form. Engineered for commercial and residential spaces, this versatile fixture blends modern aesthetics with high-performance output. Its sleek design, dimmable capabilities, and multiple color temperature options make it a reliable solution for ambient or task lighting in a variety of settings.

OVERVIEW

CCT: 2700K-5000K

Applications: Indoor (IP44)

Efficacy: 72-80 lm/W

Dimming: Switch

LED Type: COB

Lens Type: Clear

Driver: J-Box

Operating Temp: -40F° to 45F°

Operating Humidity: 10%-65%RH

Lifespan: 50,000 Hours

Warranty: 5 Years

FEATURES

- High-performance COB LED for superior brightness and efficiency
- Wide 120° beam angle for broad light distribution
- IP44-rated for moisture-resistant indoor use
- Switch dimming for customizable lighting environments

ITEM | 3X3 DESIGNER DOWNLIGHT FIXTURE


Project:_____ Type:_____

Name:_____ Date:_____

PHOTOMETRICS:

X° Beam Angle: (Polar Candela Dist.)


Light Distance: (Illuminance at a Distance)

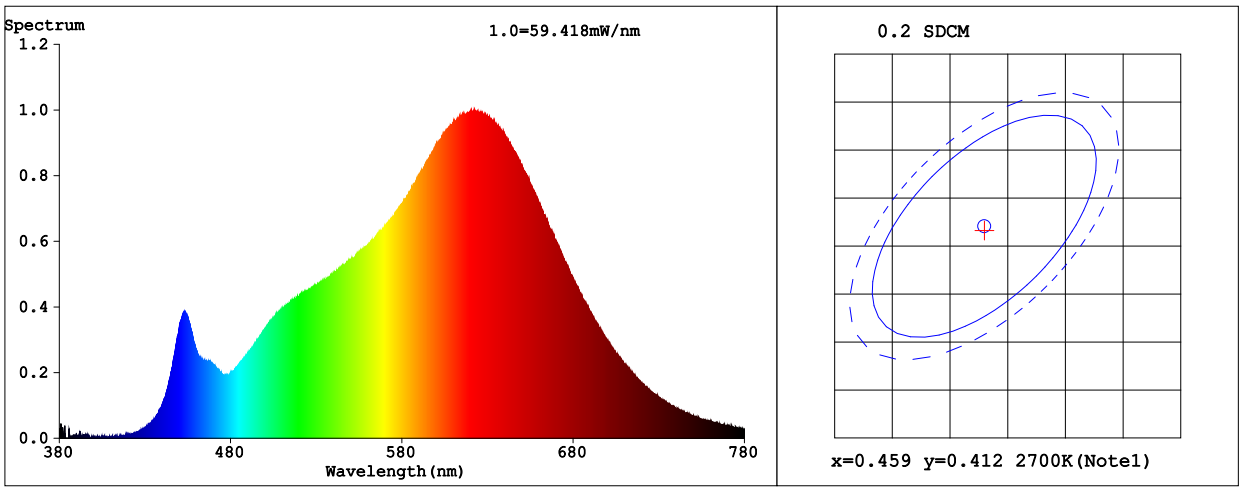

IMPORTANT SAFEGUARDS:

1. Installation, service and maintenance should be performed by a qualified licensed electrician.
2. Make all electrical and grounded connections in accordance with national electrical code and any applicable local code requirements.
3. Disconnect power at fuse or circuit breaker before installing or servicing.
4. Review the diagrams thoroughly before beginning.
5. Do not mount in hazardous locations, or near gas or electric heaters.
6. Do not let power cords touch hot surfaces.
7. Equipment should be mounted in locations where it will not be subjected to tampering by unauthorized personnel.
8. Do not use equipment for other than its intended use.

DIMENSIONS:

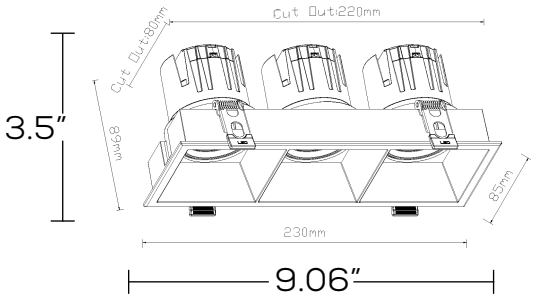

ITEM | 3X3 DESIGNER DOWNLIGHT FIXTURE

Project:_____ Type:_____

Name:_____ Date:_____

ORDER FORM:

(*) Special Order/Not Commonly Stocked

Custom Model Assembly

Fixture	CCT	Watts	Beam Angle	Voltage	Trim
☐ DL3X3	☑ Tunable	☑ 36	☑ 120°	☑ 120V	☐ BK
					☐ WH

SES-_____
Example Model Number

_____	**SES** – **DL3x3** –	_____	– **36W** – **120°** – **120V** –	
Quantity	Fixture	CCT	Watts / Beam Angle / Voltage	Trim

Common Stock Models:

Item #	Model #
11493	SES-DL3x3-36-BK
11492	SES-DL3x3-36-WH

Optional Accessories:

Item #	Model #	QTY