CP6-02 | LED CANOPY LIGHT

Project: _____ Type: _____

Name: _____ Date: _____

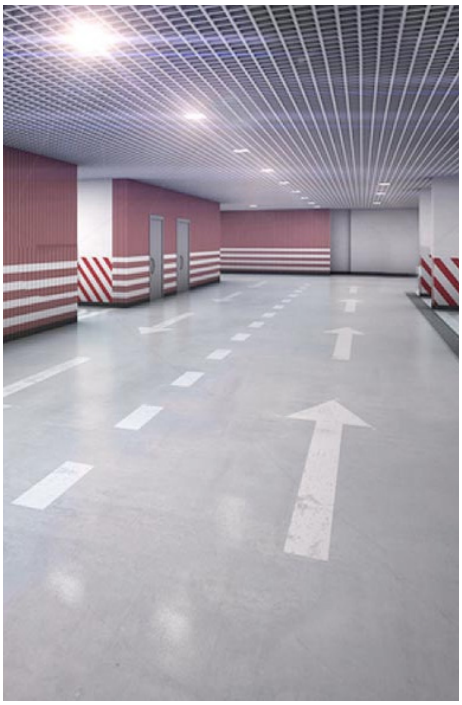

	Watts	Lumens	Finish	Efficacy
11464	95W	12,825lm	White	135lm/W
11468	150W	22,500lm-24,000lm	White	150-160lm/W
11506	150W	22,500lm-24,000lm	Bronze	150-160lm/W

Size	15" L x 15" W x 2.6" D	**Lumens**	95W: 12,825lm 150W:22,500-24,000lm
Watts	95W, 150W	**CCT**	5700K
Voltage	120-277V	**IP Rating**	IP65
Dimming	0-10V	**Materials**	Die-Cast Aluminum
Beam Angle	120°	**Finish**	White, Bronze
CRI	>80	**Lens**	Clear Stripe PC
PF	≥ 0.9	**Lifespan**	50,000 Hours

SARIN LED PARKING CANOPY LIGHTS offer the best in class for parking garage safety and lighting. These lights illuminate dark areas like no other and provide safety by deterring criminal activity, keeping patrons moving along with confidence.

These garage lights are high efficiency and light up areas effortlessly with lumen output of up to 24,000, with a CCT of 5700K. These lights are designed for parking garages and for outdoor use; safe when exposed to rain and moisture. The LEDs in this unit are guaranteed to last up to 50,000 hours and are backed by a 5 year warranty.

OVERVIEW

CCT: 5700K

Applications: IP65

Efficacy: 150-160lm/W, 135lm/W

Dimming: 0-10V

LED Type: SMD2835

Lens Type: Clear Stripe PC

Driver: SS-120NH-E260BH, SS-160NH-E260BH

Operating Temp: -40°F to 113°F

Operating Humidity: 20% - 90% RH

Lifespan: 50,000 Hours

Warranty: 5 Years

FEATURES

- Extremely high efficacy of 150-160lm/W for the 150W fixture and 135lm/W for the 95W fixture, which saves on electricity usage

CP6-02 | LED CANOPY LIGHT

Project: _____ Type: _____

Name: _____ Date: _____

PHOTOMETRICS:

95W

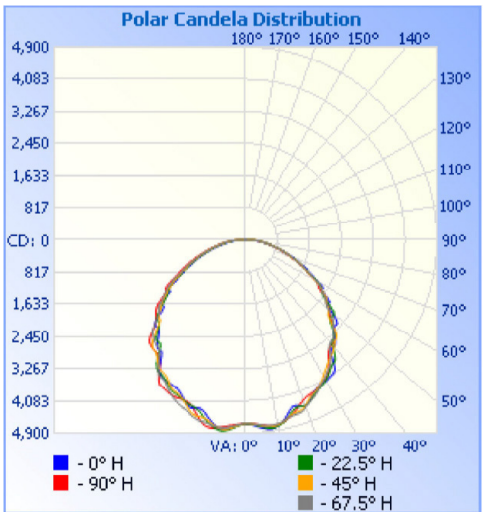

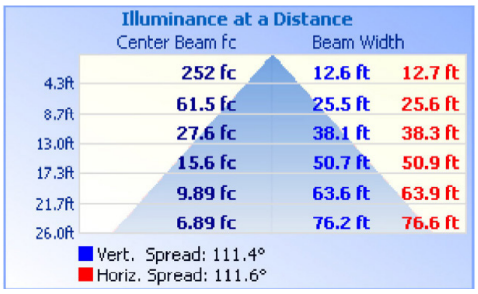

150W

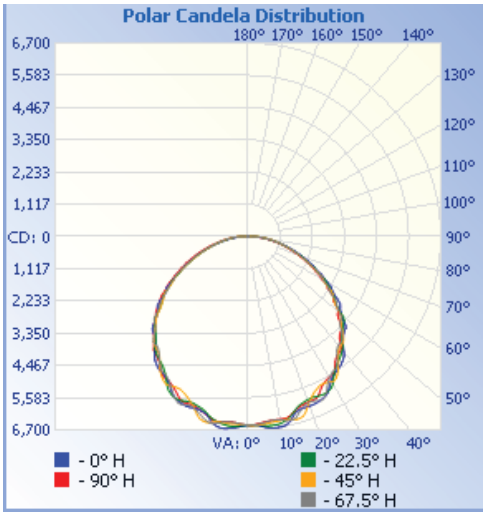

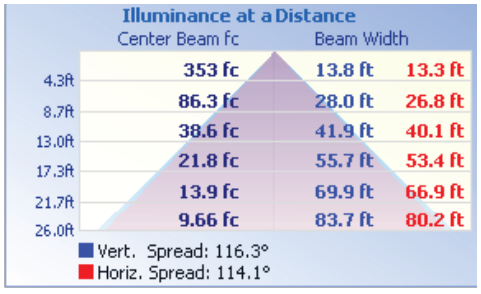

IMPORTANT SAFEGUARDS:

1. Installation, service and maintenance should be performed by a qualified licensed electrician.
2. Make all electrical and grounded connections in accordance with national electrical code and any applicable local code requirements.
3. Disconnect power at fuse or circuit breaker before installing or servicing.
4. Review the diagrams thoroughly before beginning.
5. Do not mount in hazardous locations, or near gas or electric heaters.
6. Do not let power cords touch hot surfaces.
7. Equipment should be mounted in locations where it will not be subjected to tampering by unauthorized personnel.
8. Do not use equipment for other than its intended use.

DIMENSIONS:



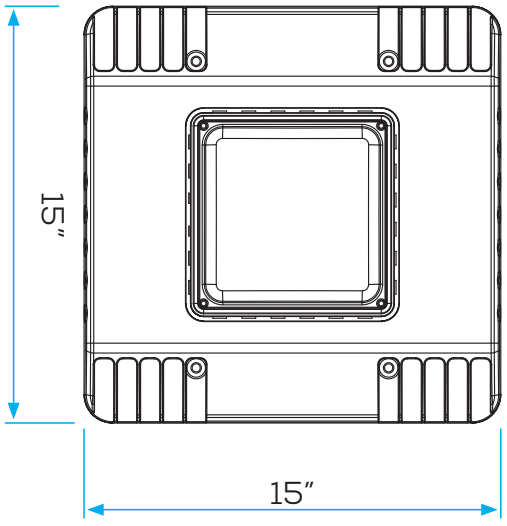

CP6-02 | LED CANOPY LIGHT

Project: _____ Type: _____

Name: _____ Date: _____

ORDER FORM:

(*) Special Order/Not Commonly Stocked

Custom Model Assembly

Fixture	CCT	Watts	Finish	Voltage
☑ CP6	☑ 5700K	☐ 95W	☐ White (WH)	☑ 120-277V
		☐ 150W	☐ White (WH) ☐ Bronze (BZ)*	

SES-CP6-02-5700-95
Example Model Number

Quantity	SES	—	CP6	—	5700K	—		—		—	120-277V
			Fixture		CCT		Watts		Finish		Voltage

Common Stock Models:

Item #	Model #
11464	SES-CP6-02-5700-95
11468	SES-CP6-02-5700-150
11506	SES-CP6-02-5700-150-BZ

*150W Only

©2026