CP02B | LED Ultra Slim Canopy Light

Project:_____ Type:_____

Name:_____ Date:_____

Size	21" L x 21" W x 9.6" H	**Lumens**	**180W:** 25,292lm
Watts	180W	**CCT**	5700K
Voltage	AC120-277V (50/60Hz)	**IP Rating**	IP65
Dimming	1-10V	**Materials**	Die-Cast Aluminum
Beam Angle	110°	**Finish**	White
CRI	>80	**Lens**	Frosted
PF	≥0.9	**Lifespan**	50,000 hours

SARIN LED Ultra Slim Canopy Lights feature a wide 110 degree beam angle with flexible 120-277 voltage range in 25,292 lumens. They are rated highly, scoring an 80 in the Color Rendering Index (CRI) and 0.9 Power Factor (PF). It comes with a frosted lens, includes state-of-the-art Sosen drivers, and is UL and DLC certified for nationally recognized safety and energy efficiency.

Canopy Lights are designed to easily mount directly onto flat ceilings for outdoor applications and are rated IP65 which means they are protected from rain, snow, and weak jets of water, such as sprinklers and rain. They are commonly found at gas stations, awnings, entryways, car ports, service stations, underground parking lots, warehouses, garages, work floors, factories and so on.

OVERVIEW

CCT: 5700K

Applications: Outdoor IP65

Efficacy: 141lm/W

Dimming: 1-10V

LED Type: SMD2835

Lens Type: Clear

Driver: Sosen

Operating Temp: -22F° to 113F°

Operating Humidity: 20-90% RH

Lifespan: 50,000 Hours

Warranty: 5 Years

FEATURES

- IP65 Outdoor Rated with a beautiful white powder-coat finish, built for longevity and to withstand the elements
- Bright and uniform, non-flickering, non-humming LEDs
- Instant starting lights provide a soft and uniform light
- UL Listed Certification ensures that the product has met stringent testing requirements for safety & is nationally recognized
- Design Lights Consortium certification indicates product has a high level of energy efficiency

855-997-2746 LED@SARINEnergy.com SARINEnergy.com ©2024

SARIN

CP02B | LED Ultra Slim Canopy Light

Project:_____ Type:_____

Name:_____ Date:_____

PHOTOMETRICS:

180W

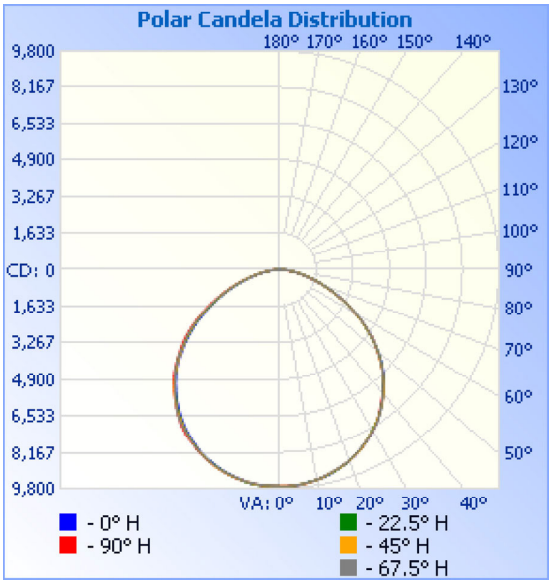

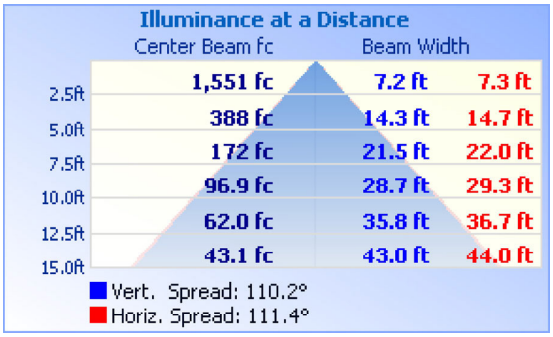

IMPORTANT SAFEGUARDS:

1. Installation, service and maintenance should be performed by a qualified licensed electrician.
2. Make all electrical and grounded connections in accordance with national electrical code and any applicable local code requirements.
3. Disconnect power at fuse or circuit breaker before installing or servicing.
4. Review the diagrams thoroughly before beginning.
5. Do not mount in hazardous locations, or near gas or electric heaters.
6. Do not let power cords touch hot surfaces.
7. Equipment should be mounted in locations where it will not be subjected to tampering by unauthorized personnel.
8. Do not use equipment for other than its intended use.

DIMENSIONS:

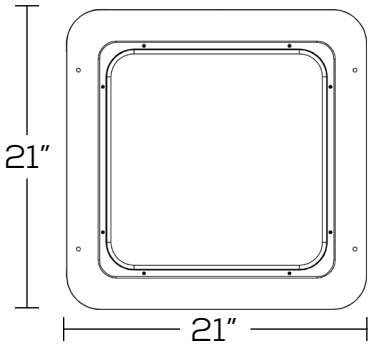

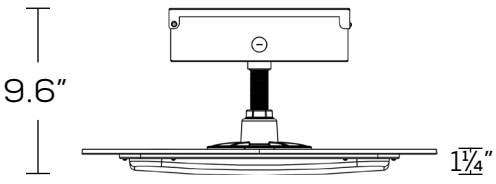

CP02B | LED Ultra Slim Canopy Light

Project:_____ Type:_____

Name:_____ Date:_____

ORDER FORM:

(*) Special Order/Not Commonly Stocked

Custom Model Assembly

Fixture	Watts	CCT	Beam Angle	Voltage
☑ CP02B	☑ 180W	☑ 5700K	☑ 110°	☑ 120-277

SES-CP02B-240-5700
Example Model Number

Quantity	SES	– CP02B	– 180	– 5700	– 110	– 120-277
		Fixture	Watts	CCT	Beam Angle	Voltage

Common Stock Models:

Item #	Model #
11463	AST-CP02B-180WSYZA3-ab