Report No.: Test Time:

Luminaire Property


Luminaire Manufacturer:
Voltage: 119.64V Current: 0.828A
Power: 98.66 W

Photometric Results

CIE Class: Semi-Direct Total Rated Lamp Lumens: 11763.4 lm
Measurement Flux: 11763.4 lm Efficiency: 100%
Downward Ratio: 80% Upward Ratio: 20%
Horizontal Diffuse Angle(10%,50%): H153.7,H92.2
Vertical Diffuse Angle(10%,50%): V160.9,V98.9
Luminaire Efficacy Rating (LER): 119.28 Central Intensity: 4005 cd
Max. Intensity: 4006.44 cd Pos of Max. Intensity: H0 V1
S/MH(C0/C180): 1.13 S/MH(C90/C270): 1.16

Picture Of Luminaire


Luminous Intensity Distribution Curve

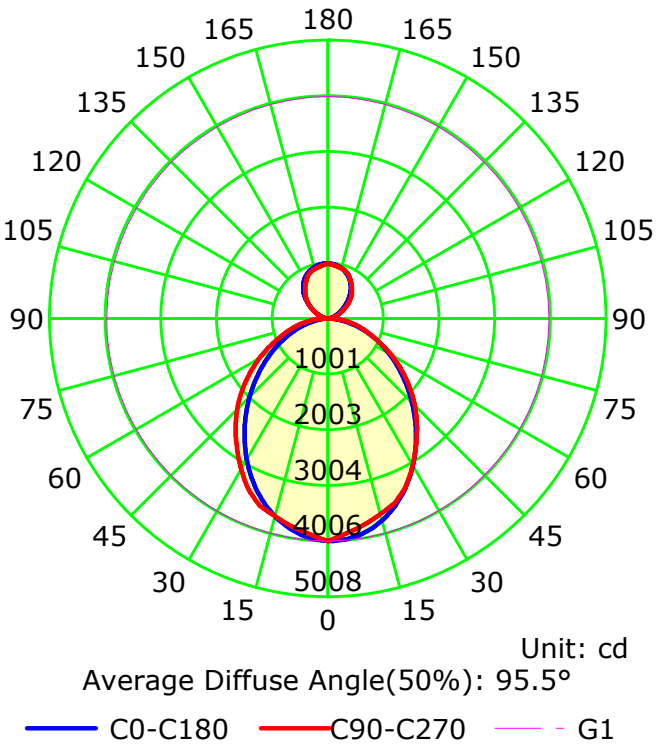


Unit: cd
Average Diffuse Angle(50%): 95.5°
C0-C180 C90-C270 G1

C Plane (°):0.0-360.0: 5.0 Gamma Plane (°):0.0-180.0:0.5
Test Lab: Test Device:
Test Type: TYPE C Distance:
Temperature: Humidity:
Operator: Inspector:

Luminous Intensity Distribution Curve

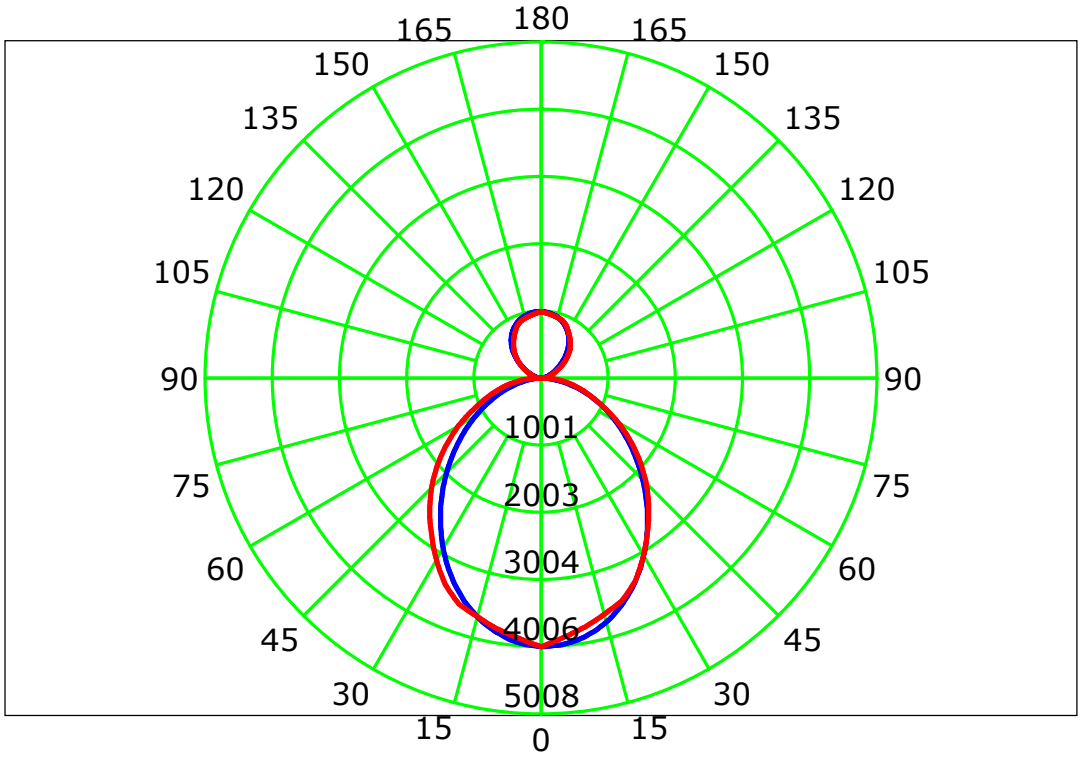


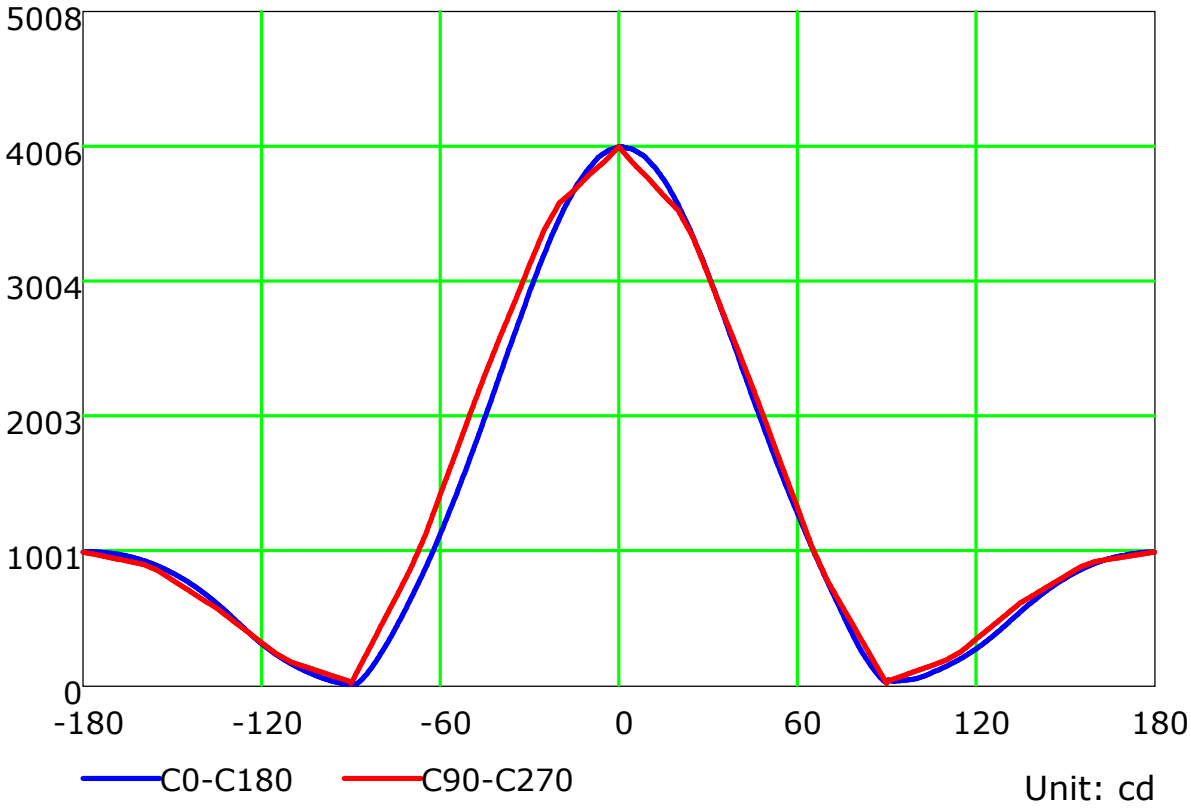

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Luminous Intensity Distribution Curve(cd/klm)

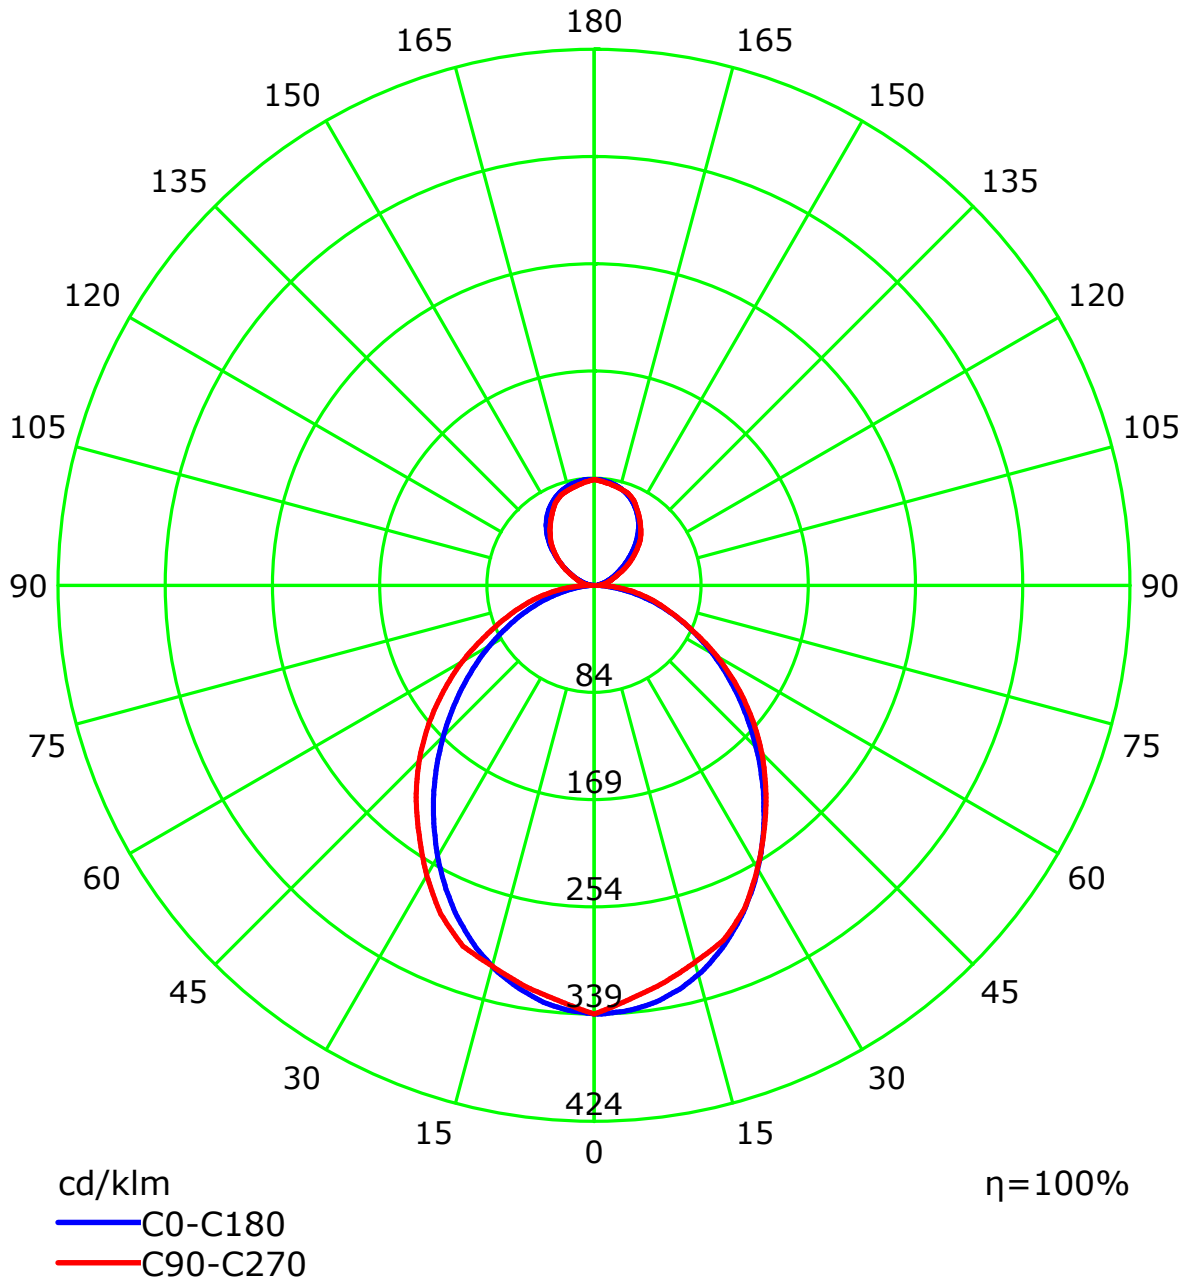

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:


Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	114	114	114	114	109	109	109	109	100	100	100	91	91	91	84	84	84	80
1	105	100	96	92	100	96	92	89	88	85	83	81	79	77	74	72	71	67
2	95	88	81	76	91	84	78	74	77	73	69	71	68	64	65	63	60	57
3	87	77	70	64	83	74	67	62	69	63	58	63	59	55	58	55	51	48
4	80	69	61	54	76	66	59	53	61	55	50	57	51	47	52	48	45	42
5	74	62	53	47	70	59	52	46	55	48	43	51	46	41	47	43	39	36
6	68	56	47	41	65	54	46	40	50	43	38	46	41	36	43	38	35	32
7	63	50	42	36	60	49	41	36	45	39	34	42	37	32	39	35	31	29
8	59	46	38	32	56	45	37	32	42	35	30	39	33	29	36	31	28	26
9	55	42	34	29	53	41	34	29	38	32	27	36	30	26	34	29	25	23
10	52	39	31	26	49	38	31	26	35	29	25	33	28	24	31	26	23	21

Spacing Criteria (0-180): 1.13
Spacing Criteria (90-270): 1.16
Spacing Criteria (Diagonal): 1.24


Curves of Luminaires vs Lighting Area

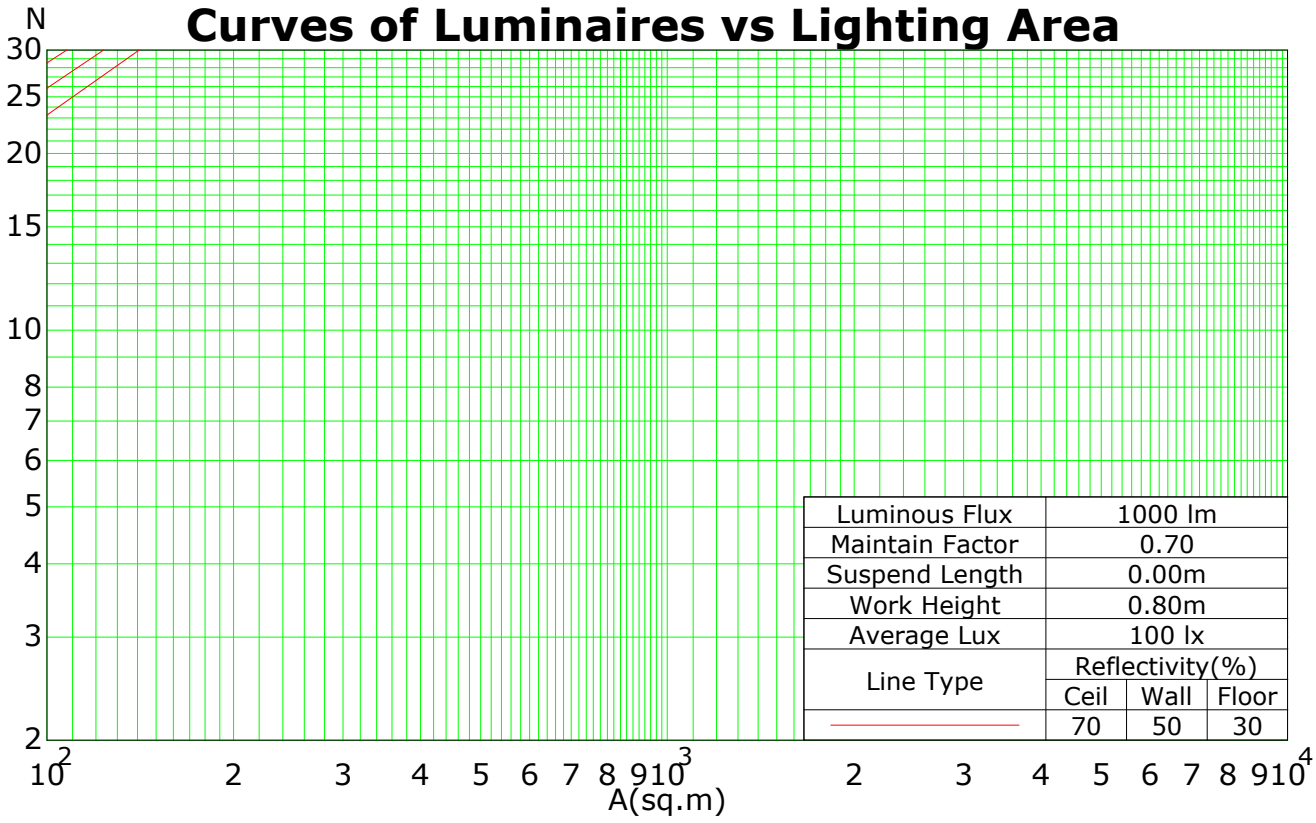

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Isocandela (rectangle)

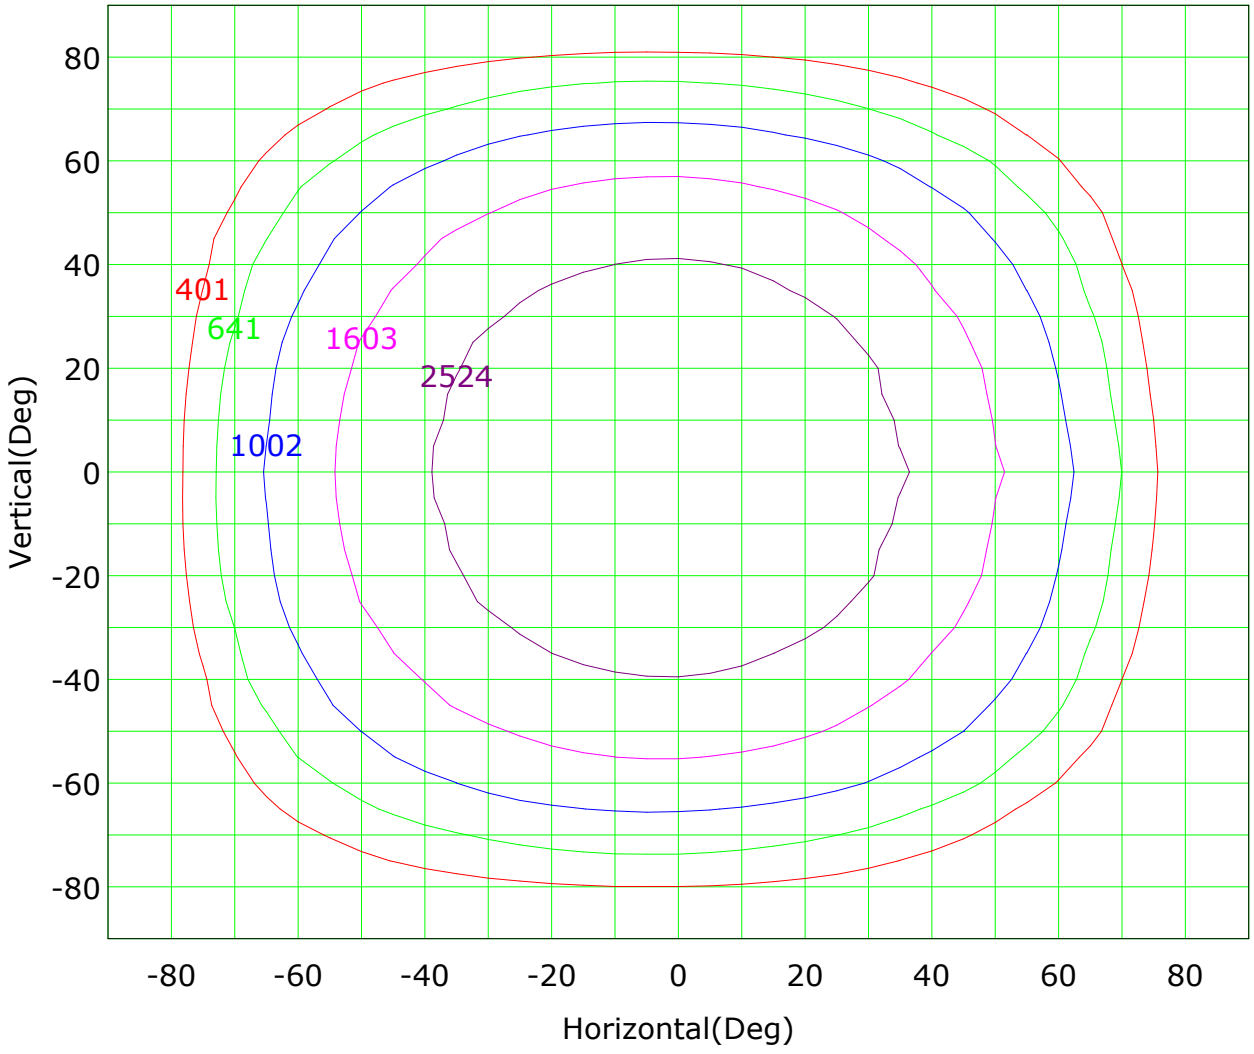


Imax (100%): 4006 cd

(10%): 401 cd
(16%): 641 cd
(25%): 1002 cd
(40%): 1603 cd
(63%): 2524 cd
(100%): 4006 cd

C Plane (°):0.0-360.0: 5.0
Gamma Plane (°):0.0-180.0:0.5
Test Lab:
Test Device:
Test Type: TYPE C
Distance:
Temperature:
Humidity:
Operator:
Inspector:

Isocandela (sphere)

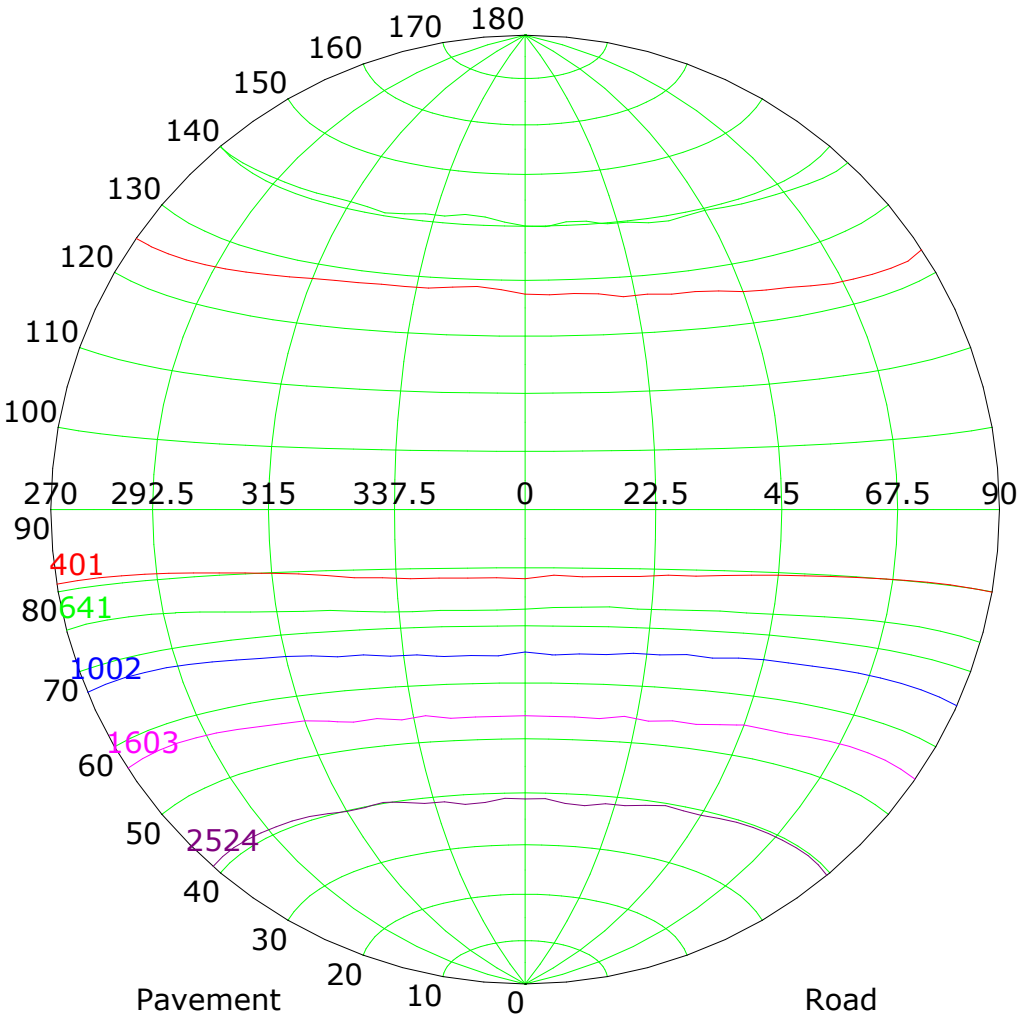


Imax (100%): 4006 cd

(10%): 401 cd
(16%): 641 cd
(25%): 1002 cd
(40%): 1603 cd
(63%): 2524 cd
(100%): 4006 cd

C Plane (°):0.0-360.0: 5.0
Gamma Plane (°):0.0-180.0:0.5
Test Lab:
Test Device:
Test Type: TYPE C
Distance:
Temperature:
Humidity:
Operator:
Inspector:

IsoLux Plot

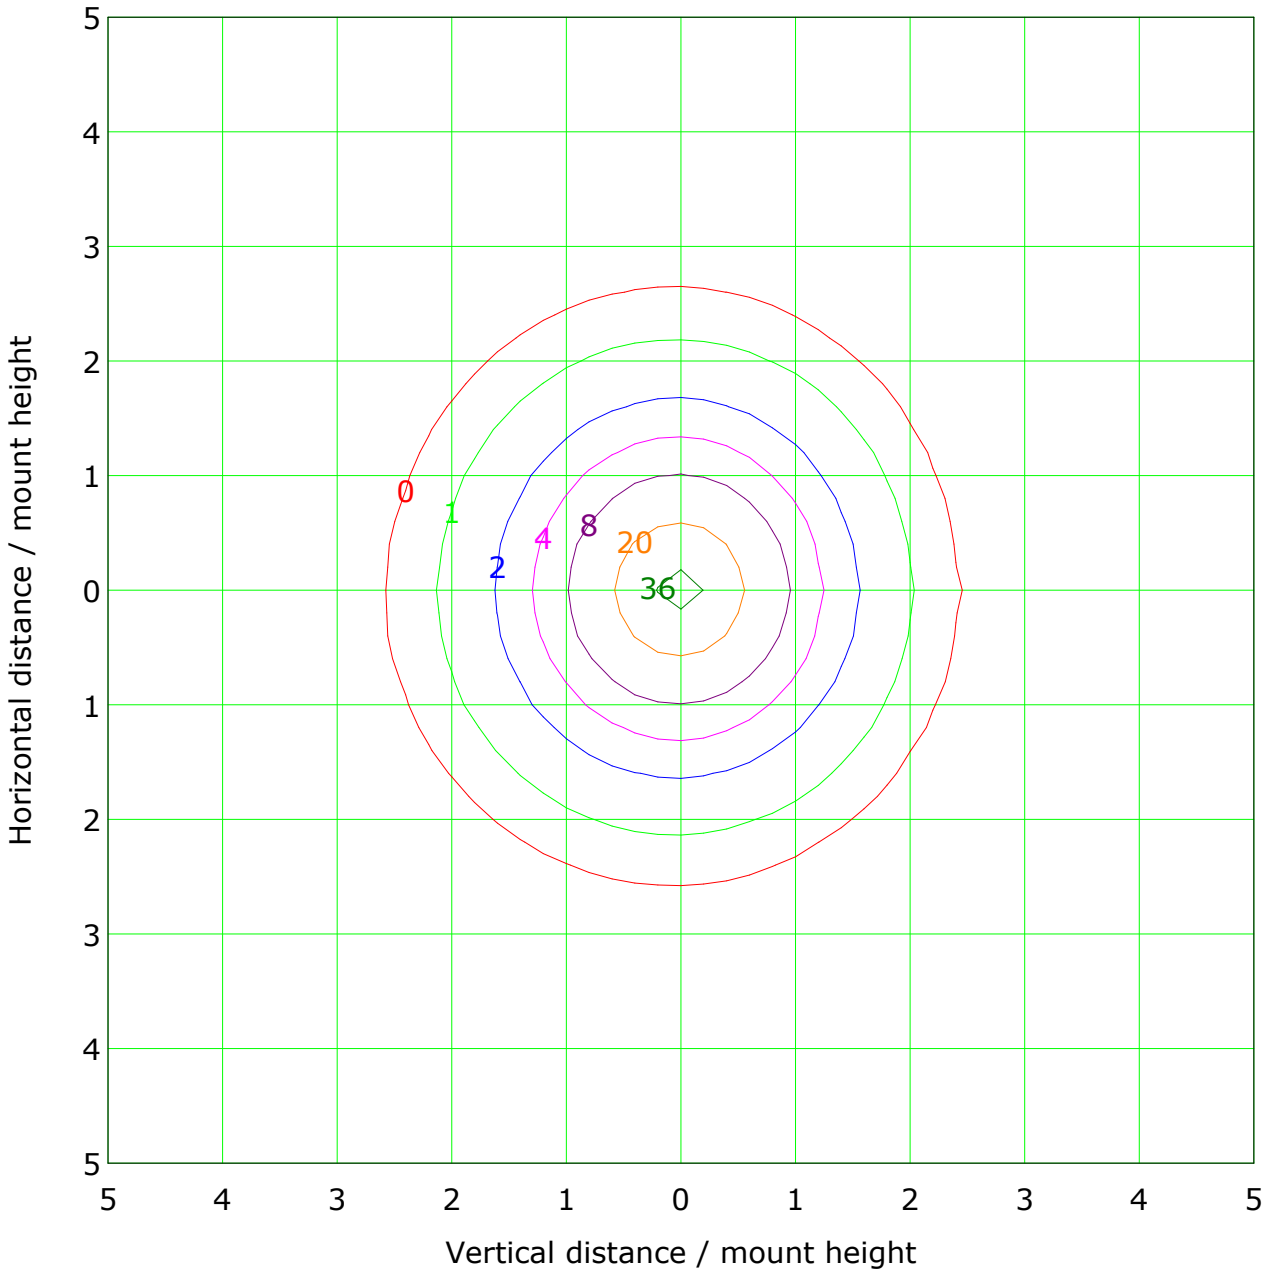


Mounting Height: 10.0m Max Lux(100%): 40.1 lx

(1%): 0.4 lx	(2%): 0.8 lx
(5%): 2.0 lx	(10%): 4.0 lx
(20%): 8.0 lx	(50%): 20.0 lx
(90%): 36.0 lx	(100%): 40.1 lx

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Roadway CU Curve

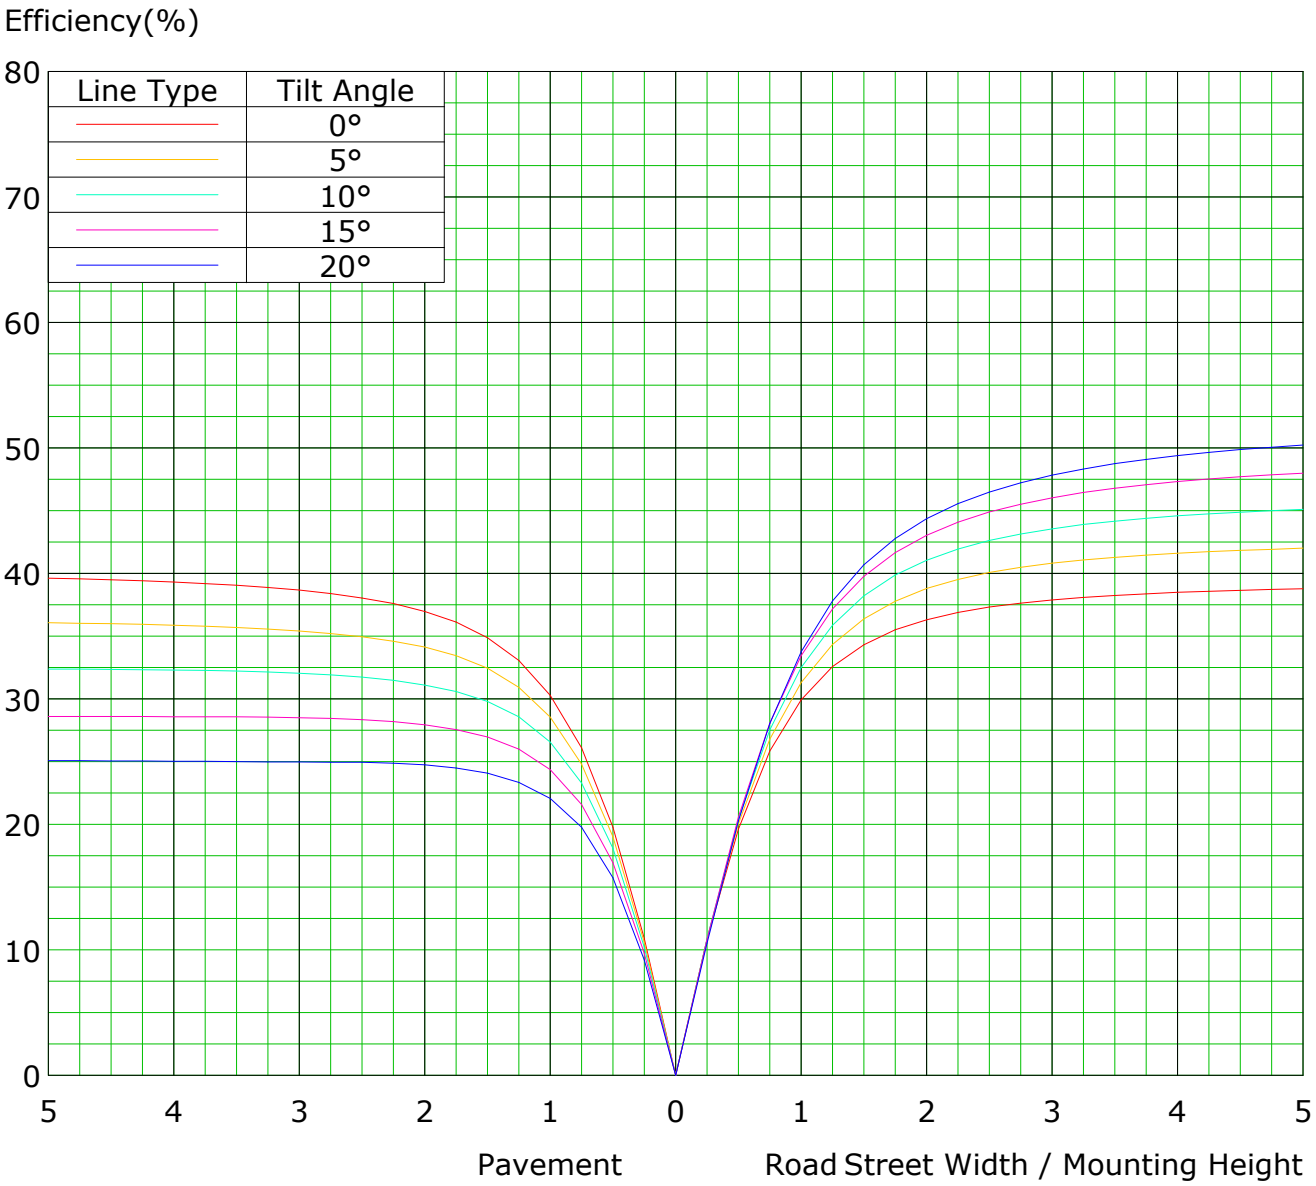



C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
		a	b	c	d	e	f	g	h

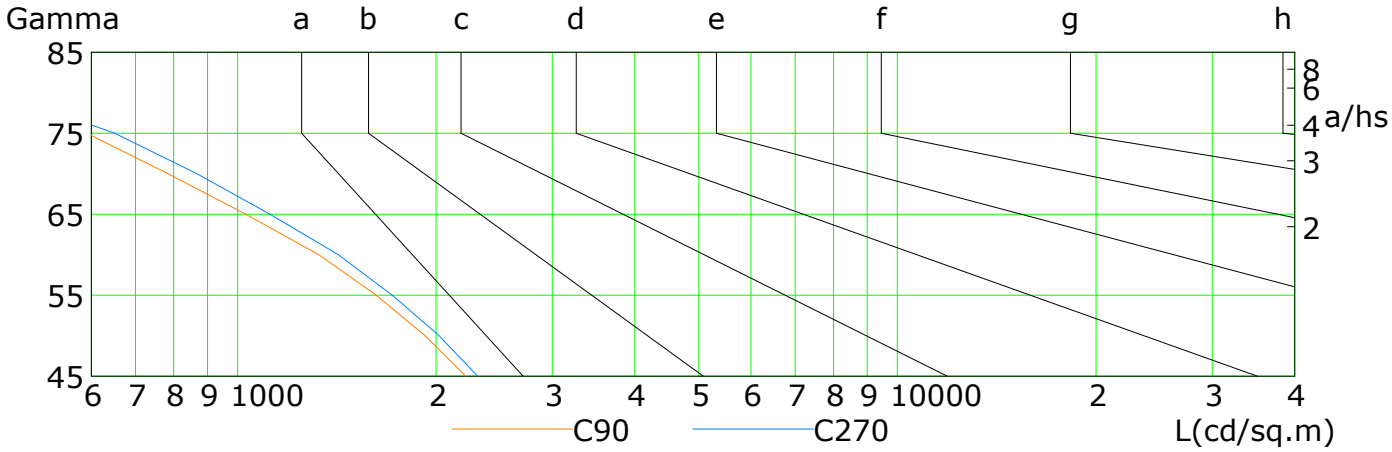

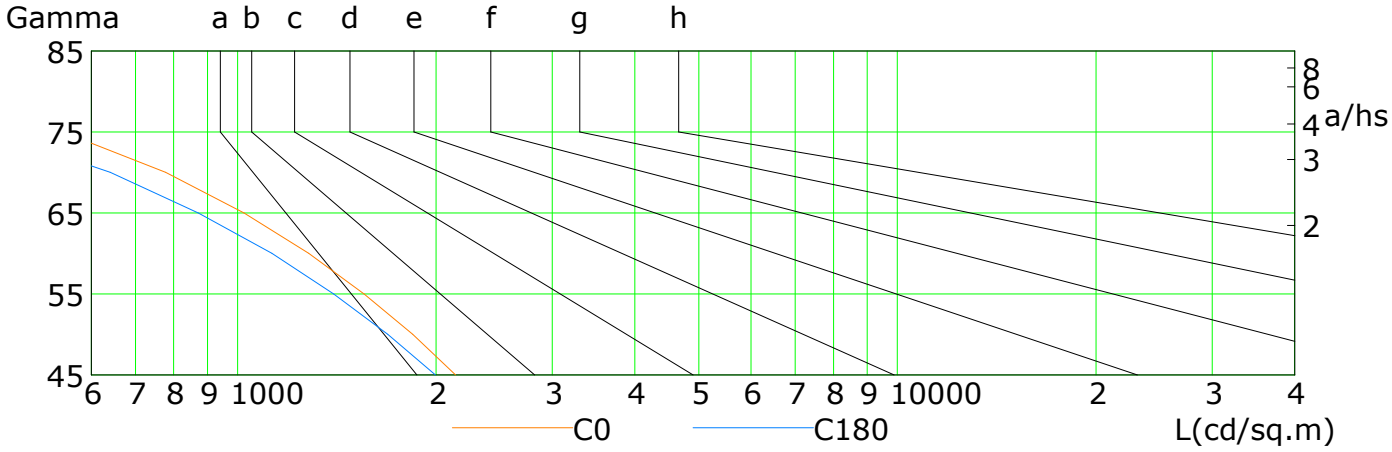


L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	2141	1842	1554	1282	1023	777	544	316	140
C90	2217	1922	1622	1327	1028	784	591	400	207
C180	1995	1690	1399	1127	872	641	427	236	78
C270	2312	2018	1716	1421	1120	867	652	440	226

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Illuminance at a Distance(Beam Angle)

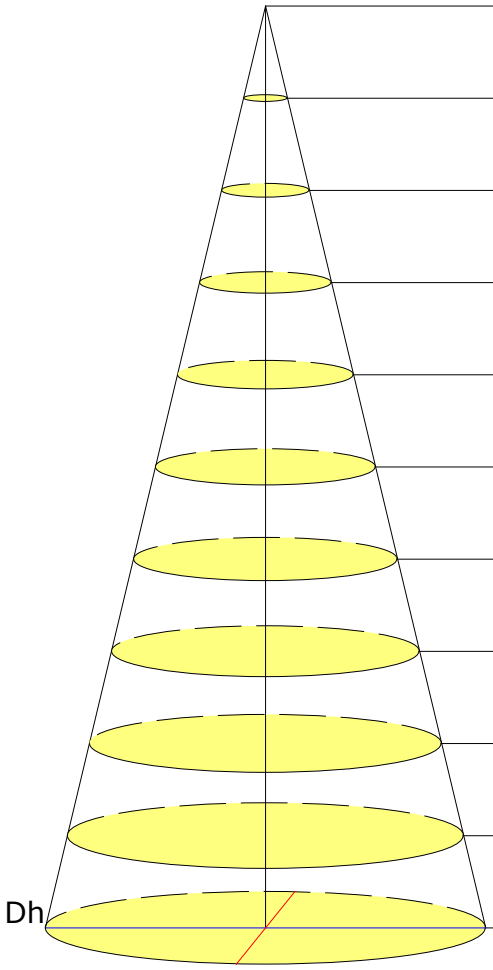


Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	4005.00	2.08/2.34	3.7	1293.60
2.0	1001.25	4.16/4.67	14.8	323.40
3.0	445.00	6.23/7.01	33.4	143.73
4.0	250.31	8.31/9.35	59.4	80.85
5.0	160.20	10.39/11.69	92.8	51.74
6.0	111.25	12.47/14.02	133.6	35.93
7.0	81.73	14.55/16.36	181.8	26.40
8.0	62.58	16.62/18.70	237.5	20.21
9.0	49.44	18.70/21.04	300.6	15.97
10.0	40.05	20.78/23.37	371.1	12.94

Beam Angle(B): H92.2 V98.9 Field Angle(F): H360.0 V360.0

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Illuminance at a Distance(Field Angle)

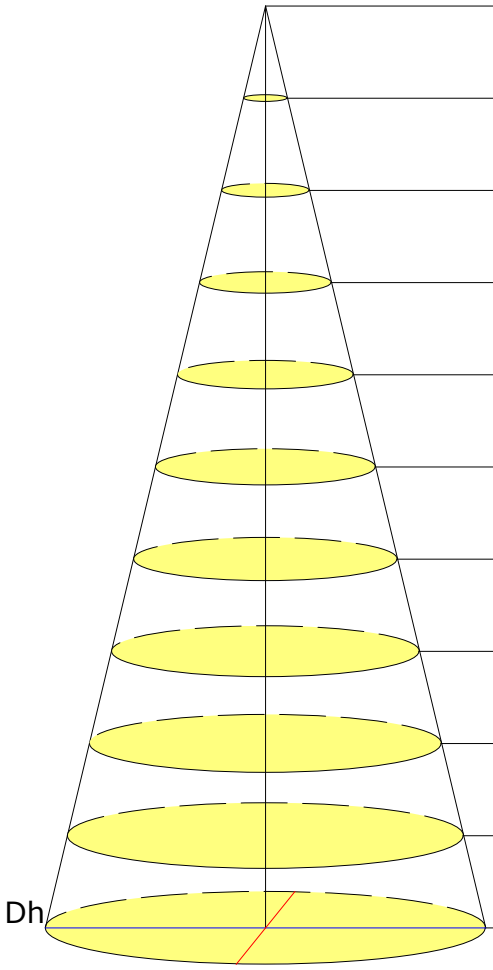


Dist(m)	Enadir(lx)	Dh/Dv_F(m)	S_F(sq.m)	Eav_F(lx)
1.0	4005.00	NA/NA	NA	NA
2.0	1001.25	NA/NA	NA	NA
3.0	445.00	NA/NA	NA	NA
4.0	250.31	NA/NA	NA	NA
5.0	160.20	NA/NA	NA	NA
6.0	111.25	NA/NA	NA	NA
7.0	81.73	NA/NA	NA	NA
8.0	62.58	NA/NA	NA	NA
9.0	49.44	NA/NA	NA	NA
10.0	40.05	NA/NA	NA	NA

Beam Angle(B): H92.2 V98.9 Field Angle(F): H360.0 V360.0

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Vertical IsoLux Plot

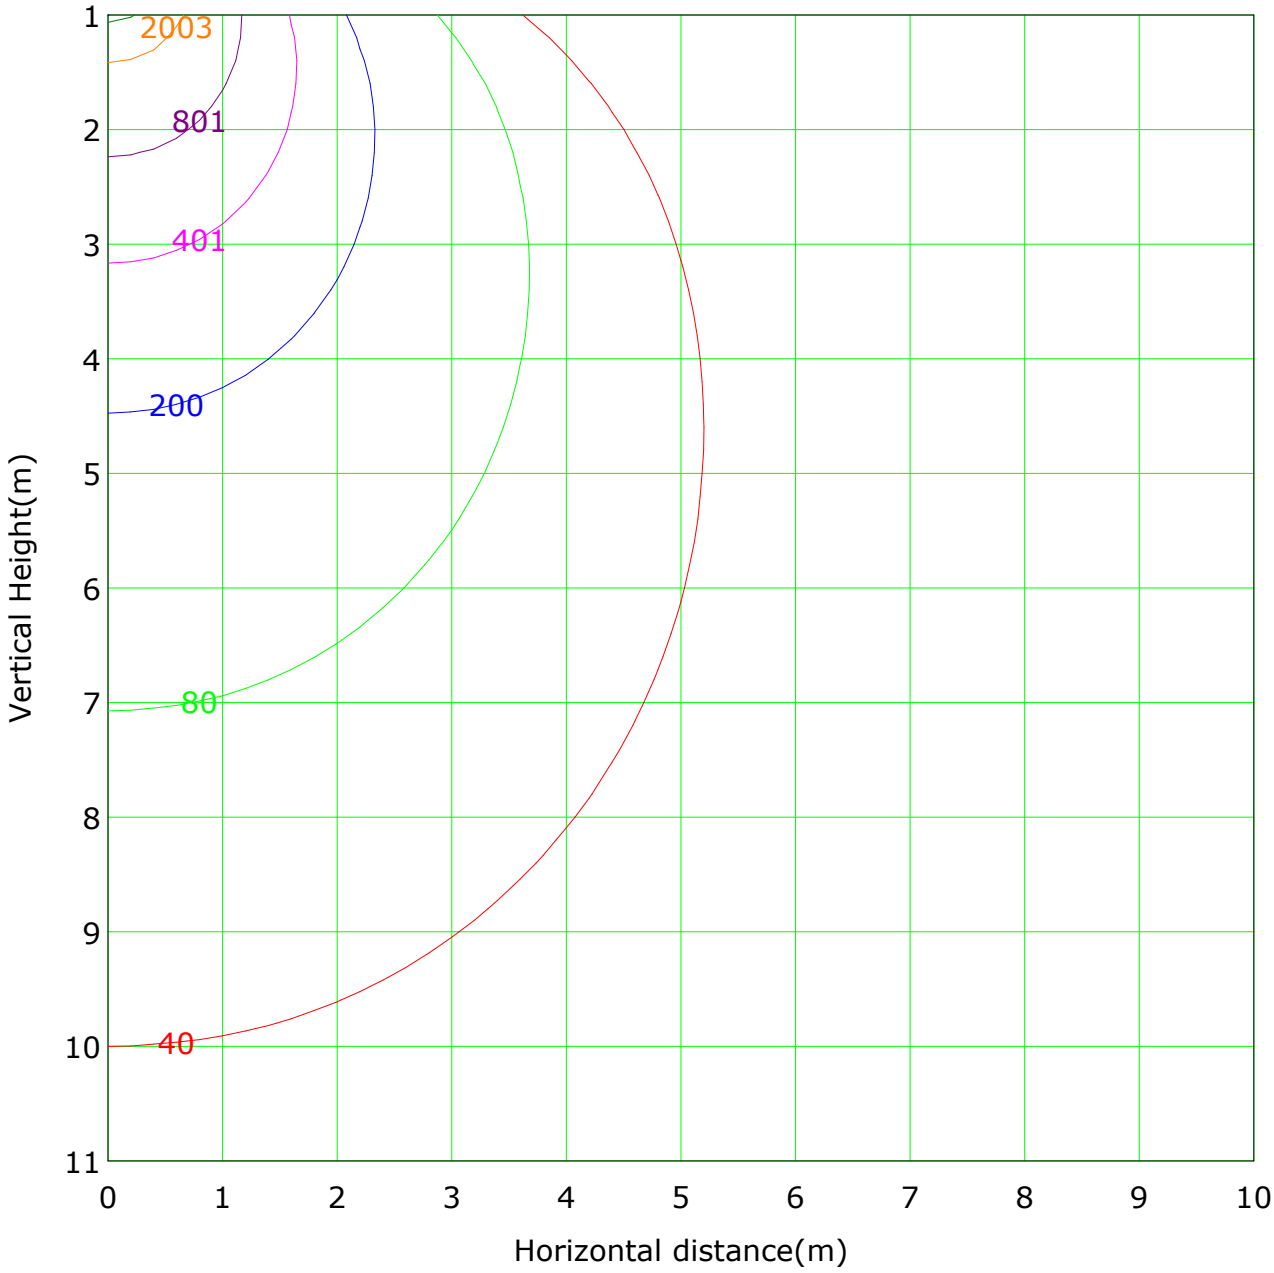

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 4005.0 lx

(1%): 40.0 lx	(2%): 80.1 lx
(5%): 200.3 lx	(10%): 400.5 lx
(20%): 801.0 lx	(50%):2002.5 lx
(90%):3604.5 lx	(100%):4005.0 lx

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Area Flux Table

Unit: lm

Vertical plane	-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90	Flux(T)	Flux(E)
-90	0.0	0.2	0.6	1.4	2.5	3.7	4.9	5.9	6.7	6.9	6.6	5.7	4.6	3.3	2.1	1.1	0.4	0.1	56.7	3.2	
-80	0.0	0.5	1.8	4.1	7.2	10.8	14.4	17.5	19.4	19.8	18.5	16.0	12.5	8.9	5.5	2.8	1.0	0.1	160.8	130.0	
-70	0.1	0.8	3.2	7.1	12.5	18.7	25.1	30.4	33.7	34.3	31.9	27.3	21.2	14.9	9.1	4.6	1.6	0.2	276.6	264.3	
-60	0.1	1.4	4.9	10.8	18.9	28.3	38.0	46.2	51.2	51.8	48.0	40.7	31.3	21.7	13.1	6.5	2.2	0.3	415.6	408.6	
-50	0.2	1.9	6.6	14.5	25.2	37.9	51.0	62.1	68.8	69.5	64.3	54.2	41.4	28.4	17.1	8.4	2.8	0.4	554.8	550.0	
-40	0.2	2.4	8.1	17.6	30.7	46.5	62.9	76.8	85.1	86.0	79.3	66.6	50.6	34.5	20.6	10.0	3.4	0.4	681.8	678.2	
-30	0.3	2.8	9.4	20.5	35.9	54.6	74.1	90.6	100.6	101.7	93.5	78.3	59.2	40.2	23.8	11.6	3.9	0.5	801.4	798.5	
-20	0.3	3.1	10.4	22.3	39.2	59.6	80.9	99.0	109.9	111.1	102.2	85.4	64.5	43.6	25.9	12.5	4.3	0.5	874.6	872.1	
-10	0.3	3.4	11.1	23.7	41.4	63.0	85.5	104.7	116.2	117.4	108.0	90.2	67.9	45.9	27.1	13.1	4.4	0.5	924.0	921.7	
0	0.3	3.5	11.2	23.7	41.3	62.8	85.2	104.3	115.8	117.0	107.7	89.9	67.8	45.8	27.1	13.2	4.5	0.5	921.6	919.4	
10	0.3	3.2	10.5	22.3	39.0	59.0	80.0	97.9	108.8	110.0	101.3	84.7	64.0	43.3	25.9	12.7	4.4	0.5	867.6	865.3	
20	0.2	2.8	9.5	20.5	35.6	53.7	72.6	88.8	98.7	100.0	92.1	77.1	58.4	39.8	23.9	11.8	4.1	0.4	790.1	787.5	
30	0.2	2.3	8.2	17.5	30.3	45.4	61.1	74.5	82.7	83.7	77.3	65.0	49.6	34.1	20.7	10.3	3.5	0.4	666.9	663.6	
40	0.1	1.8	6.7	14.3	24.7	36.7	48.9	59.4	65.9	66.8	61.8	52.3	40.3	28.0	17.2	8.7	2.9	0.3	536.8	532.4	
50	0.1	1.2	4.8	10.5	18.2	27.1	36.0	43.6	48.3	49.0	45.6	38.8	30.2	21.3	13.2	6.7	2.2	0.3	397.2	390.7	
60	0.1	0.7	2.9	6.7	11.8	17.5	23.3	28.0	31.0	31.6	29.6	25.5	20.2	14.5	9.2	4.7	1.4	0.2	258.9	246.3	
70	0.0	0.4	1.6	3.8	6.7	10.0	13.3	15.9	17.6	17.9	16.9	14.8	11.9	8.6	5.6	2.9	0.9	0.2	149.2	113.4	
80	0.0	0.2	0.7	1.4	2.5	3.6	4.7	5.6	6.2	6.3	6.0	5.3	4.4	3.3	2.2	1.3	0.5	0.1	54.1	0.0	
90	2.9	32.7	112.3	242.8	423.4	638.9	861.7	1051.3	1166.7	1180.8	1090.5	917.9	700.1	480.1	289.3	142.9	48.4	6.0	9389		
Flux(T)	0.0	12.9	95.2	225.5	407.1	623.7	848.1	1038.4	1155.0	1168.9	1078.5	905.4	687.2	466.7	274.6	128.0	30.2	0.0		9145	
Flux(E)																					

Horizontal plane


INVENTFINE™ 创惠仪器

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

The Average Illuminance Effective Figure

Flux Out: 5631.74lm

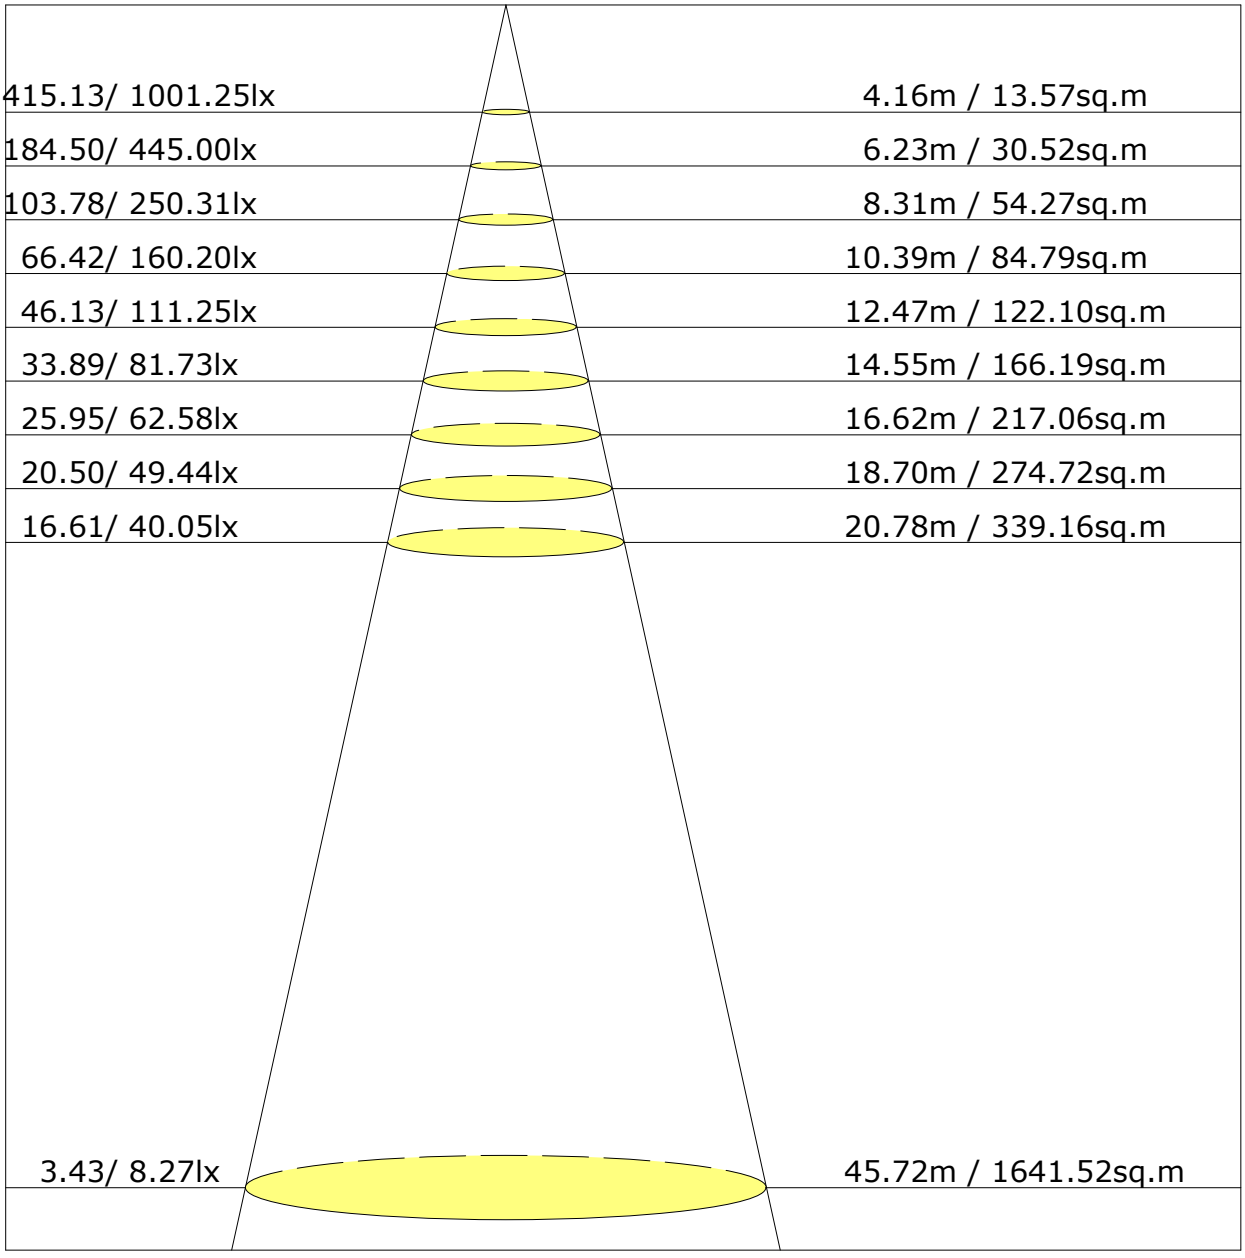

Height	Avg./Nadir. E	Beam Angle:92.2°	Diameter / Area
2.0m	415.13/ 1001.25lx		4.16m / 13.57sq.m
3.0m	184.50/ 445.00lx		6.23m / 30.52sq.m
4.0m	103.78/ 250.31lx		8.31m / 54.27sq.m
5.0m	66.42/ 160.20lx		10.39m / 84.79sq.m
6.0m	46.13/ 111.25lx		12.47m / 122.10sq.m
7.0m	33.89/ 81.73lx		14.55m / 166.19sq.m
8.0m	25.95/ 62.58lx		16.62m / 217.06sq.m
9.0m	20.50/ 49.44lx		18.70m / 274.72sq.m
10.0m	16.61/ 40.05lx		20.78m / 339.16sq.m
22.0m	3.43/ 8.27lx		45.72m / 1641.52sq.m

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

UGR Table


Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
3H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
4H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
6H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
8H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
12H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
X=4H Y=2H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
3H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
4H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
6H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
8H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
12H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
X=8H Y=4H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
6H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
8H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
12H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
X=12H Y=4H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
6H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
8H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
Variations with the observer position at spacings:										
S=1.0H	-1.$/-1.$					-1.$/-1.$				
S=1.5H	-1.$/-1.$					-1.$/-1.$				
S=2.0H	-1.$/-1.$					-1.$/-1.$				

Calculate in accordance with CIE Pub.117. The table is revised with 11763lm (8log(F/F0) = 8.6).

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

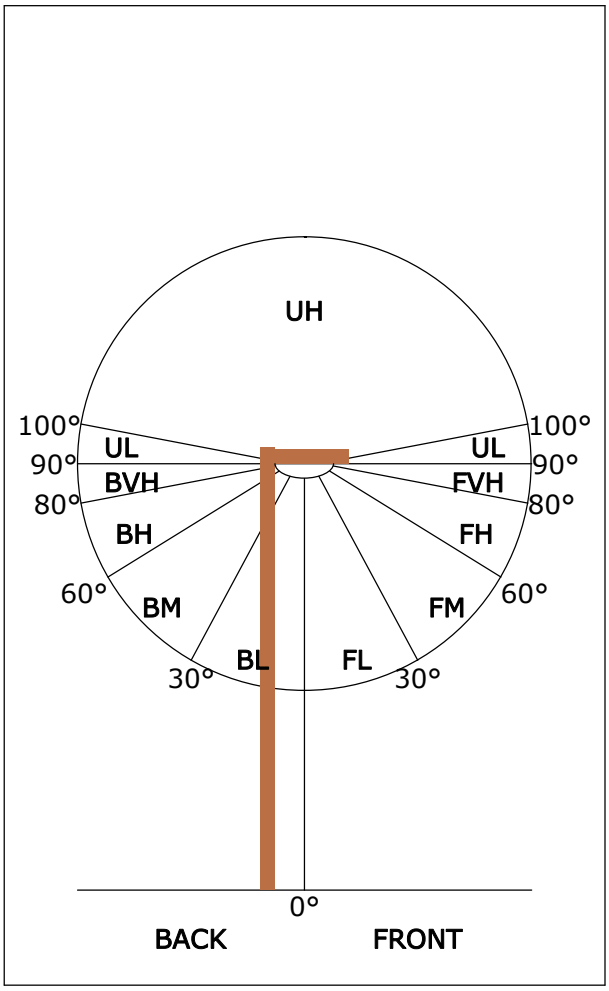


ZONE	LUMENS	% LAMP LUMENS
FORWARD LIGHT	4643	39.5
FL (0°-30°)	1445	12.3
FM (30°-60°)	2341	19.9
FH (60°-80°)	765	6.5
FVH (80°-90°)	92	0.8
BACK LIGHT	4747	40.4
BL (0°-30°)	1458	12.4
BM (30°-60°)	2396	20.4
BH (60°-80°)	796	6.8
BVH (80°-90°)	96	0.8
UP LIGHT	2374	20.2
UL (90°-100°)	56	0.5
UH (100°-180°)	2318	19.7
TRAPPED LIGHT	0	0.0

BUG(**B**acklight,**U**plight,**G**lare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B3 U5 G2
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B3 U5 G1

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

LCS Graph

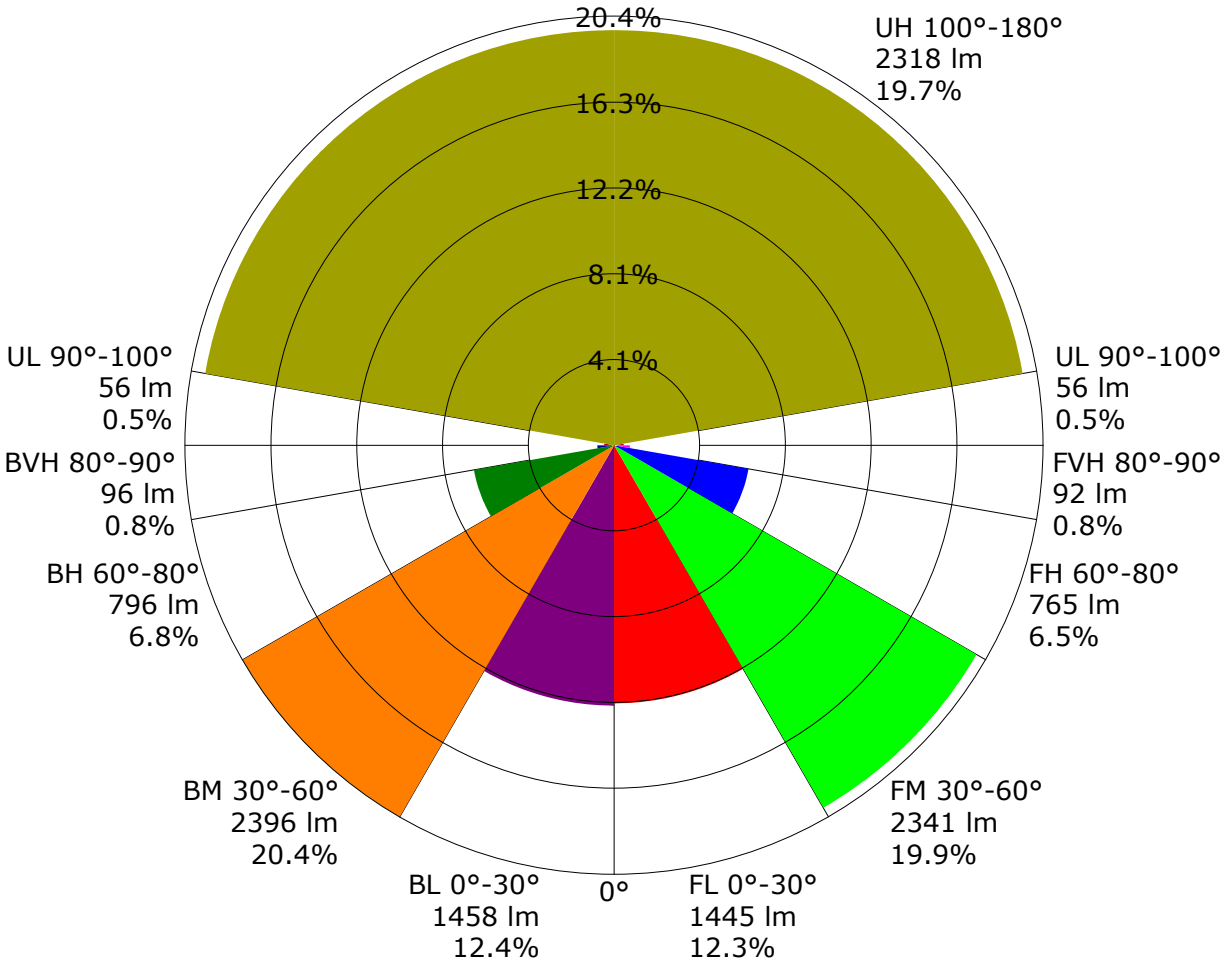

Scale= MAX LCS%

Trapped Light:0 lm,0.0%

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Utilisation Factor Table(Floor cavity)

Utilisation Factors UF(F)			SHR NOM = 1.25								
Room Reflectance			Room Index(RI)								
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.55	0.64	0.71	0.76	0.83	0.87	0.90	0.95	0.97
	0.30		0.48	0.57	0.64	0.69	0.77	0.82	0.86	0.91	0.94
	0.20		0.42	0.52	0.59	0.64	0.72	0.78	0.82	0.87	0.91
0.50	0.50	0.20	0.51	0.60	0.66	0.70	0.76	0.81	0.83	0.87	0.89
	0.30		0.45	0.54	0.60	0.65	0.72	0.76	0.80	0.84	0.87
	0.20		0.41	0.50	0.56	0.61	0.68	0.73	0.76	0.81	0.85
0.30	0.50	0.20	0.48	0.56	0.61	0.65	0.71	0.74	0.77	0.80	0.82
	0.30		0.43	0.51	0.57	0.61	0.67	0.71	0.74	0.78	0.80
	0.20		0.39	0.47	0.53	0.58	0.64	0.68	0.71	0.76	0.78
0.00	0.00	0.00	0.35	0.43	0.48	0.52	0.57	0.61	0.64	0.67	0.69

Rating:99W Photometrically tested without ceiling board.

Multiply UF values by service correction factors

Calculate in accordance with CIBSE Technical Memorandum NO.5 1980

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Utilisation Factor Table(Wall)

Utilisation Factors UF(W)			SHR NOM = 1.25								
Room Reflectance			Room Index(RI)								
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.92	0.76	0.65	0.56	0.45	0.37	0.32	0.25	0.20
	0.30		0.77	0.65	0.56	0.50	0.41	0.34	0.30	0.23	0.19
	0.20		0.66	0.57	0.50	0.45	0.37	0.32	0.28	0.22	0.18
0.50	0.50	0.20	0.84	0.69	0.59	0.51	0.41	0.37	0.29	0.22	0.18
	0.30		0.71	0.60	0.52	0.46	0.37	0.31	0.27	0.21	0.18
	0.20		0.62	0.53	0.47	0.42	0.34	0.29	0.25	0.20	0.17
0.30	0.50	0.20	0.78	0.63	0.54	0.47	0.37	0.31	0.26	0.20	0.17
	0.30		0.66	0.56	0.48	0.42	0.34	0.29	0.25	0.19	0.16
	0.20		0.58	0.50	0.43	0.39	0.32	0.27	0.23	0.18	0.15
0.00	0.00	0.00	0.45	0.37	0.32	0.28	0.23	0.19	0.17	0.13	0.11

Rating:99W Photometrically tested without ceiling board.

Multiply UF values by service correction factors

Calculate in accordance with CIBSE Technical Memorandum NO.5 1980

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Utilisation Factor Table(Ceiling cavity)

Utilisation Factors UF(C)			SHR NOM = 1.25								
Room Reflectance			Room Index(RI)								
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.35	0.37	0.37	0.38	0.39	0.39	0.40	0.40	0.41
	0.30		0.29	0.31	0.32	0.33	0.34	0.36	0.36	0.38	0.38
	0.20		0.25	0.26	0.28	0.29	0.31	0.32	0.33	0.35	0.36
0.50	0.50	0.20	0.34	0.35	0.36	0.37	0.37	0.38	0.38	0.39	0.39
	0.30		0.29	0.30	0.31	0.32	0.33	0.34	0.35	0.36	0.37
	0.20		0.24	0.26	0.27	0.28	0.30	0.31	0.32	0.34	0.35
0.30	0.50	0.20	0.33	0.34	0.35	0.35	0.36	0.36	0.37	0.37	0.37
	0.30		0.28	0.29	0.30	0.31	0.32	0.33	0.34	0.35	0.36
	0.20		0.24	0.26	0.27	0.28	0.29	0.31	0.32	0.33	0.34
0.00	0.00	0.00	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20

Rating:99W Photometrically tested without ceiling board.

Multiply UF values by service correction factors

Calculate in accordance with CIBSE Technical Memorandum NO.5 1980

Zonal Lumen

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-0.5	4000.5	1.0	1.0	0.01	0.01
0.5-1.0	3991.7	2.9	3.8	0.02	0.03
1.0-1.5	3982.7	4.8	8.6	0.04	0.07
1.5-2.0	3973.5	6.7	15.2	0.06	0.13
2.0-2.5	3964.3	8.5	23.8	0.07	0.20
2.5-3.0	3955.2	10.4	34.2	0.09	0.29
3.0-3.5	3945.9	12.3	46.4	0.10	0.39
3.5-4.0	3936.5	14.1	60.6	0.12	0.51
4.0-4.5	3926.8	16.0	76.5	0.14	0.65
4.5-5.0	3916.7	17.8	94.3	0.15	0.80
5.0-5.5	3906.4	19.6	113.9	0.17	0.97
5.5-6.0	3896.1	21.4	135.3	0.18	1.15
6.0-6.5	3885.4	23.2	158.5	0.20	1.35
6.5-7.0	3874.5	25.0	183.5	0.21	1.56
7.0-7.5	3863.3	26.7	210.2	0.23	1.79
7.5-8.0	3851.6	28.5	238.7	0.24	2.03
8.0-8.5	3839.6	30.2	268.9	0.26	2.29
8.5-9.0	3827.3	31.9	300.8	0.27	2.56
9.0-9.5	3814.9	33.6	334.4	0.29	2.84
9.5-10.0	3802.3	35.3	369.7	0.30	3.14
10.0-10.5	3789.4	37.0	406.7	0.31	3.46
10.5-11.0	3776.1	38.6	445.3	0.33	3.79
11.0-11.5	3762.5	40.2	485.6	0.34	4.13
11.5-12.0	3748.6	41.9	527.4	0.36	4.48
12.0-12.5	3734.4	43.4	570.9	0.37	4.85
12.5-13.0	3720.0	45.0	615.9	0.38	5.24
13.0-13.5	3705.3	46.6	662.5	0.40	5.63
13.5-14.0	3690.4	48.1	710.6	0.41	6.04
14.0-14.5	3675.2	49.6	760.2	0.42	6.46
14.5-15.0	3659.5	51.1	811.2	0.43	6.90
15.0-15.5	3643.6	52.5	863.8	0.45	7.34
15.5-16.0	3627.5	54.0	917.8	0.46	7.80
16.0-16.5	3611.4	55.4	973.2	0.47	8.27
16.5-17.0	3595.2	56.8	1030.0	0.48	8.76
17.0-17.5	3578.7	58.2	1088.2	0.49	9.25
17.5-18.0	3562.0	59.5	1147.7	0.51	9.76

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
18.0-18.5	3545.0	60.9	1208.6	0.52	10.27
18.5-19.0	3527.8	62.2	1270.8	0.53	10.80
19.0-19.5	3510.4	63.5	1334.2	0.54	11.34
19.5-20.0	3492.8	64.7	1399.0	0.55	11.89
20.0-20.5	3474.6	65.9	1464.9	0.56	12.45
20.5-21.0	3455.5	67.1	1532.0	0.57	13.02
21.0-21.5	3435.6	68.3	1600.3	0.58	13.60
21.5-22.0	3415.1	69.4	1669.7	0.59	14.19
22.0-22.5	3394.2	70.5	1740.2	0.60	14.79
22.5-23.0	3372.8	71.5	1811.7	0.61	15.40
23.0-23.5	3351.0	72.5	1884.2	0.62	16.02
23.5-24.0	3329.0	73.5	1957.7	0.62	16.64
24.0-24.5	3306.7	74.5	2032.2	0.63	17.28
24.5-25.0	3284.0	75.4	2107.6	0.64	17.92
25.0-25.5	3260.8	76.3	2183.8	0.65	18.56
25.5-26.0	3236.6	77.1	2260.9	0.66	19.22
26.0-26.5	3211.7	77.9	2338.8	0.66	19.88
26.5-27.0	3186.4	78.6	2417.5	0.67	20.55
27.0-27.5	3160.6	79.3	2496.8	0.67	21.23
27.5-28.0	3134.5	80.0	2576.8	0.68	21.91
28.0-28.5	3108.0	80.7	2657.5	0.69	22.59
28.5-29.0	3081.3	81.3	2738.8	0.69	23.28
29.0-29.5	3054.4	81.8	2820.6	0.70	23.98
29.5-30.0	3027.1	82.4	2903.0	0.70	24.68
30.0-30.5	2999.3	82.8	2985.8	0.70	25.38
30.5-31.0	2971.2	83.3	3069.1	0.71	26.09
31.0-31.5	2943.0	83.7	3152.8	0.71	26.80
31.5-32.0	2914.6	84.1	3236.9	0.71	27.52
32.0-32.5	2886.0	84.4	3321.4	0.72	28.23
32.5-33.0	2857.3	84.8	3406.1	0.72	28.96
33.0-33.5	2828.3	85.0	3491.1	0.72	29.68
33.5-34.0	2799.3	85.3	3576.4	0.72	30.40
34.0-34.5	2770.0	85.5	3661.9	0.73	31.13
34.5-35.0	2740.7	85.7	3747.5	0.73	31.86
35.0-35.5	2711.4	85.8	3833.3	0.73	32.59
35.5-36.0	2682.2	85.9	3919.3	0.73	33.32

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-36.5	2652.8	86.0	4005.3	0.73	34.05
36.5-37.0	2623.2	86.1	4091.3	0.73	34.78
37.0-37.5	2593.5	86.1	4177.4	0.73	35.51
37.5-38.0	2563.9	86.1	4263.5	0.73	36.24
38.0-38.5	2534.2	86.0	4349.5	0.73	36.98
38.5-39.0	2504.7	86.0	4435.5	0.73	37.71
39.0-39.5	2475.1	85.9	4521.3	0.73	38.44
39.5-40.0	2445.5	85.7	4607.1	0.73	39.16
40.0-40.5	2415.8	85.6	4692.7	0.73	39.89
40.5-41.0	2386.2	85.4	4778.1	0.73	40.62
41.0-41.5	2356.4	85.2	4863.3	0.72	41.34
41.5-42.0	2326.6	84.9	4948.2	0.72	42.06
42.0-42.5	2296.9	84.7	5032.9	0.72	42.78
42.5-43.0	2267.3	84.4	5117.3	0.72	43.50
43.0-43.5	2237.7	84.1	5201.3	0.71	44.22
43.5-44.0	2208.0	83.7	5285.1	0.71	44.93
44.0-44.5	2178.4	83.3	5368.4	0.71	45.64
44.5-45.0	2148.9	83.0	5451.4	0.71	46.34
45.0-45.5	2119.4	82.5	5533.9	0.70	47.04
45.5-46.0	2089.8	82.1	5616.0	0.70	47.74
46.0-46.5	2060.3	81.6	5697.6	0.69	48.43
46.5-47.0	2030.7	81.1	5778.7	0.69	49.12
47.0-47.5	2001.3	80.6	5859.2	0.68	49.81
47.5-48.0	1971.8	80.0	5939.3	0.68	50.49
48.0-48.5	1942.3	79.5	6018.7	0.68	51.17
48.5-49.0	1912.8	78.9	6097.6	0.67	51.84
49.0-49.5	1883.4	78.2	6175.8	0.67	52.50
49.5-50.0	1854.0	77.6	6253.4	0.66	53.16
50.0-50.5	1824.7	76.9	6330.3	0.65	53.81
50.5-51.0	1795.5	76.2	6406.6	0.65	54.46
51.0-51.5	1766.3	75.5	6482.1	0.64	55.10
51.5-52.0	1737.2	74.8	6556.9	0.64	55.74
52.0-52.5	1708.2	74.1	6631.0	0.63	56.37
52.5-53.0	1679.3	73.3	6704.2	0.62	56.99
53.0-53.5	1650.4	72.5	6776.8	0.62	57.61
53.5-54.0	1621.6	71.7	6848.5	0.61	58.22

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Zonal Lumen (Continue 3)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
54.0-54.5	1592.8	70.9	6919.3	0.60	58.82
54.5-55.0	1564.1	70.0	6989.4	0.60	59.42
55.0-55.5	1535.4	69.2	7058.5	0.59	60.00
55.5-56.0	1506.8	68.3	7126.8	0.58	60.59
56.0-56.5	1478.4	67.4	7194.2	0.57	61.16
56.5-57.0	1450.2	66.5	7260.7	0.57	61.72
57.0-57.5	1422.0	65.6	7326.3	0.56	62.28
57.5-58.0	1393.9	64.6	7390.9	0.55	62.83
58.0-58.5	1365.9	63.7	7454.6	0.54	63.37
58.5-59.0	1338.0	62.7	7517.3	0.53	63.90
59.0-59.5	1310.3	61.7	7579.1	0.52	64.43
59.5-60.0	1282.8	60.8	7639.9	0.52	64.95
60.0-60.5	1255.3	59.8	7699.6	0.51	65.45
60.5-61.0	1227.9	58.7	7758.4	0.50	65.95
61.0-61.5	1200.5	57.7	7816.1	0.49	66.44
61.5-62.0	1173.2	56.7	7872.7	0.48	66.93
62.0-62.5	1146.0	55.6	7928.3	0.47	67.40
62.5-63.0	1119.0	54.5	7982.9	0.46	67.86
63.0-63.5	1092.0	53.5	8036.3	0.45	68.32
63.5-64.0	1065.1	52.4	8088.7	0.45	68.76
64.0-64.5	1038.2	51.3	8140.0	0.44	69.20
64.5-65.0	1011.5	50.2	8190.2	0.43	69.62
65.0-65.5	985.1	49.1	8239.2	0.42	70.04
65.5-66.0	959.2	48.0	8287.2	0.41	70.45
66.0-66.5	933.8	46.9	8334.0	0.40	70.85
66.5-67.0	908.8	45.8	8379.8	0.39	71.24
67.0-67.5	883.9	44.7	8424.5	0.38	71.62
67.5-68.0	859.3	43.6	8468.1	0.37	71.99
68.0-68.5	834.9	42.5	8510.6	0.36	72.35
68.5-69.0	810.8	41.4	8552.1	0.35	72.70
69.0-69.5	786.9	40.3	8592.4	0.34	73.04
69.5-70.0	763.2	39.3	8631.7	0.33	73.38
70.0-70.5	739.9	38.2	8669.9	0.32	73.70
70.5-71.0	717.2	37.1	8707.0	0.32	74.02
71.0-71.5	694.8	36.1	8743.1	0.31	74.32
71.5-72.0	672.8	35.0	8778.1	0.30	74.62

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Zonal Lumen (Continue 4)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-72.5	651.1	34.0	8812.1	0.29	74.91
72.5-73.0	629.7	33.0	8845.1	0.28	75.19
73.0-73.5	608.5	31.9	8877.0	0.27	75.46
73.5-74.0	587.6	30.9	8908.0	0.26	75.73
74.0-74.5	567.0	29.9	8937.9	0.25	75.98
74.5-75.0	546.5	28.9	8966.8	0.25	76.23
75.0-75.5	526.3	27.9	8994.7	0.24	76.46
75.5-76.0	506.3	26.9	9021.6	0.23	76.69
76.0-76.5	486.5	25.9	9047.5	0.22	76.91
76.5-77.0	466.7	24.9	9072.4	0.21	77.12
77.0-77.5	447.2	23.9	9096.3	0.20	77.33
77.5-78.0	427.9	22.9	9119.3	0.19	77.52
78.0-78.5	408.7	21.9	9141.2	0.19	77.71
78.5-79.0	389.7	21.0	9162.2	0.18	77.89
79.0-79.5	371.0	20.0	9182.2	0.17	78.06
79.5-80.0	352.4	19.0	9201.2	0.16	78.22
80.0-80.5	333.8	18.0	9219.2	0.15	78.37
80.5-81.0	315.4	17.1	9236.3	0.15	78.52
81.0-81.5	297.2	16.1	9252.4	0.14	78.65
81.5-82.0	279.2	15.2	9267.5	0.13	78.78
82.0-82.5	261.7	14.2	9281.7	0.12	78.90
82.5-83.0	244.3	13.3	9295.0	0.11	79.02
83.0-83.5	227.2	12.4	9307.4	0.11	79.12
83.5-84.0	210.3	11.5	9318.9	0.10	79.22
84.0-84.5	193.6	10.6	9329.4	0.09	79.31
84.5-85.0	177.3	9.7	9339.1	0.08	79.39
85.0-85.5	161.2	8.8	9347.9	0.07	79.47
85.5-86.0	145.3	7.9	9355.9	0.07	79.53
86.0-86.5	129.5	7.1	9363.0	0.06	79.59
86.5-87.0	113.9	6.2	9369.2	0.05	79.65
87.0-87.5	98.5	5.4	9374.6	0.05	79.69
87.5-88.0	83.2	4.6	9379.1	0.04	79.73
88.0-88.5	68.1	3.7	9382.9	0.03	79.76
88.5-89.0	53.1	2.9	9385.8	0.02	79.79
89.0-89.5	38.3	2.1	9387.9	0.02	79.81
89.5-90.0	24.4	1.3	9389.2	0.01	79.82

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Zonal Lumen (Continue 5)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
90.0-90.5	25.2	1.4	9390.6	0.01	79.83
90.5-91.0	33.5	1.8	9392.4	0.02	79.84
91.0-91.5	35.2	1.9	9394.4	0.02	79.86
91.5-92.0	37.0	2.0	9396.4	0.02	79.88
92.0-92.5	38.9	2.1	9398.5	0.02	79.90
92.5-93.0	41.0	2.2	9400.8	0.02	79.92
93.0-93.5	43.1	2.4	9403.1	0.02	79.94
93.5-94.0	45.2	2.5	9405.6	0.02	79.96
94.0-94.5	47.4	2.6	9408.2	0.02	79.98
94.5-95.0	49.7	2.7	9410.9	0.02	80.00
95.0-95.5	52.1	2.8	9413.8	0.02	80.03
95.5-96.0	54.6	3.0	9416.7	0.03	80.05
96.0-96.5	57.1	3.1	9419.9	0.03	80.08
96.5-97.0	59.7	3.3	9423.1	0.03	80.11
97.0-97.5	62.4	3.4	9426.5	0.03	80.13
97.5-98.0	65.1	3.5	9430.0	0.03	80.16
98.0-98.5	68.0	3.7	9433.7	0.03	80.20
98.5-99.0	70.8	3.8	9437.6	0.03	80.23
99.0-99.5	73.8	4.0	9441.6	0.03	80.26
99.5-100.0	76.8	4.2	9445.7	0.04	80.30
100.0-100.5	79.9	4.3	9450.0	0.04	80.33
100.5-101.0	83.1	4.5	9454.5	0.04	80.37
101.0-101.5	86.3	4.6	9459.1	0.04	80.41
101.5-102.0	89.7	4.8	9464.0	0.04	80.45
102.0-102.5	93.1	5.0	9468.9	0.04	80.50
102.5-103.0	96.6	5.2	9474.1	0.04	80.54
103.0-103.5	100.3	5.4	9479.5	0.05	80.58
103.5-104.0	104.0	5.5	9485.0	0.05	80.63
104.0-104.5	107.8	5.7	9490.7	0.05	80.68
104.5-105.0	111.6	5.9	9496.6	0.05	80.73
105.0-105.5	115.6	6.1	9502.8	0.05	80.78
105.5-106.0	119.7	6.3	9509.1	0.05	80.84
106.0-106.5	123.8	6.5	9515.6	0.06	80.89
106.5-107.0	128.1	6.7	9522.3	0.06	80.95
107.0-107.5	132.5	6.9	9529.3	0.06	81.01
107.5-108.0	137.1	7.2	9536.4	0.06	81.07

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Zonal Lumen (Continue 6)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
108.0-108.5	141.8	7.4	9543.8	0.06	81.13
108.5-109.0	146.7	7.6	9551.4	0.06	81.20
109.0-109.5	151.7	7.9	9559.3	0.07	81.26
109.5-110.0	157.1	8.1	9567.4	0.07	81.33
110.0-110.5	162.7	8.4	9575.7	0.07	81.40
110.5-111.0	168.5	8.6	9584.4	0.07	81.48
111.0-111.5	174.4	8.9	9593.3	0.08	81.55
111.5-112.0	180.4	9.2	9602.5	0.08	81.63
112.0-112.5	186.6	9.5	9612.0	0.08	81.71
112.5-113.0	192.9	9.8	9621.7	0.08	81.79
113.0-113.5	199.3	10.0	9631.8	0.09	81.88
113.5-114.0	205.9	10.3	9642.1	0.09	81.97
114.0-114.5	212.6	10.6	9652.7	0.09	82.06
114.5-115.0	219.5	10.9	9663.7	0.09	82.15
115.0-115.5	226.8	11.2	9674.9	0.10	82.25
115.5-116.0	234.1	11.6	9686.5	0.10	82.34
116.0-116.5	241.6	11.9	9698.3	0.10	82.45
116.5-117.0	249.1	12.2	9710.5	0.10	82.55
117.0-117.5	256.7	12.5	9723.0	0.11	82.66
117.5-118.0	264.4	12.8	9735.9	0.11	82.76
118.0-118.5	272.2	13.1	9749.0	0.11	82.88
118.5-119.0	280.1	13.5	9762.5	0.11	82.99
119.0-119.5	288.0	13.8	9776.3	0.12	83.11
119.5-120.0	296.1	14.1	9790.4	0.12	83.23
120.0-120.5	304.3	14.4	9804.8	0.12	83.35
120.5-121.0	312.5	14.7	9819.5	0.13	83.48
121.0-121.5	320.8	15.0	9834.5	0.13	83.60
121.5-122.0	329.2	15.4	9849.9	0.13	83.73
122.0-122.5	337.7	15.7	9865.6	0.13	83.87
122.5-123.0	346.3	16.0	9881.5	0.14	84.00
123.0-123.5	354.9	16.3	9897.8	0.14	84.14
123.5-124.0	363.6	16.6	9914.4	0.14	84.28
124.0-124.5	372.4	16.9	9931.3	0.14	84.43
124.5-125.0	381.3	17.2	9948.4	0.15	84.57
125.0-125.5	390.2	17.5	9965.9	0.15	84.72
125.5-126.0	399.1	17.8	9983.7	0.15	84.87

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Zonal Lumen (Continue 7)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
126.0-126.5	408.1	18.0	10001.7	0.15	85.02
126.5-127.0	417.1	18.3	10020.0	0.16	85.18
127.0-127.5	426.2	18.6	10038.6	0.16	85.34
127.5-128.0	435.3	18.9	10057.5	0.16	85.50
128.0-128.5	444.4	19.1	10076.6	0.16	85.66
128.5-129.0	453.5	19.4	10096.0	0.16	85.83
129.0-129.5	462.6	19.6	10115.7	0.17	85.99
129.5-130.0	471.8	19.9	10135.6	0.17	86.16
130.0-130.5	481.0	20.1	10155.7	0.17	86.33
130.5-131.0	490.2	20.4	10176.1	0.17	86.51
131.0-131.5	499.4	20.6	10196.6	0.18	86.68
131.5-132.0	508.6	20.8	10217.5	0.18	86.86
132.0-132.5	517.7	21.0	10238.5	0.18	87.04
132.5-133.0	526.8	21.2	10259.7	0.18	87.22
133.0-133.5	535.8	21.4	10281.1	0.18	87.40
133.5-134.0	544.8	21.6	10302.6	0.18	87.58
134.0-134.5	553.7	21.7	10324.4	0.18	87.77
134.5-135.0	562.5	21.9	10346.3	0.19	87.95
135.0-135.5	571.1	22.0	10368.3	0.19	88.14
135.5-136.0	579.7	22.2	10390.5	0.19	88.33
136.0-136.5	588.2	22.3	10412.8	0.19	88.52
136.5-137.0	596.7	22.4	10435.2	0.19	88.71
137.0-137.5	605.2	22.5	10457.8	0.19	88.90
137.5-138.0	613.5	22.6	10480.4	0.19	89.09
138.0-138.5	621.8	22.7	10503.1	0.19	89.29
138.5-139.0	629.9	22.8	10525.9	0.19	89.48
139.0-139.5	638.0	22.8	10548.7	0.19	89.67
139.5-140.0	646.0	22.9	10571.6	0.19	89.87
140.0-140.5	653.9	22.9	10594.5	0.19	90.06
140.5-141.0	661.7	23.0	10617.5	0.20	90.26
141.0-141.5	669.3	23.0	10640.4	0.20	90.45
141.5-142.0	676.8	23.0	10663.4	0.20	90.65
142.0-142.5	684.2	23.0	10686.4	0.20	90.84
142.5-143.0	691.6	23.0	10709.3	0.20	91.04
143.0-143.5	698.8	22.9	10732.3	0.19	91.23
143.5-144.0	706.0	22.9	10755.1	0.19	91.43

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Zonal Lumen (Continue 8)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
144.0-144.5	713.0	22.8	10778.0	0.19	91.62
144.5-145.0	719.7	22.8	10800.8	0.19	91.82
145.0-145.5	726.4	22.7	10823.5	0.19	92.01
145.5-146.0	733.0	22.6	10846.1	0.19	92.20
146.0-146.5	739.5	22.5	10868.6	0.19	92.39
146.5-147.0	746.0	22.4	10891.0	0.19	92.58
147.0-147.5	752.5	22.3	10913.4	0.19	92.77
147.5-148.0	758.9	22.2	10935.6	0.19	92.96
148.0-148.5	765.4	22.1	10957.6	0.19	93.15
148.5-149.0	771.9	22.0	10979.6	0.19	93.34
149.0-149.5	778.4	21.8	11001.4	0.19	93.52
149.5-150.0	785.1	21.7	11023.1	0.18	93.71
150.0-150.5	791.7	21.5	11044.6	0.18	93.89
150.5-151.0	798.3	21.4	11066.0	0.18	94.07
151.0-151.5	804.8	21.2	11087.3	0.18	94.25
151.5-152.0	811.3	21.1	11108.3	0.18	94.43
152.0-152.5	817.6	20.9	11129.2	0.18	94.61
152.5-153.0	823.8	20.7	11149.9	0.18	94.78
153.0-153.5	829.7	20.5	11170.3	0.17	94.96
153.5-154.0	835.3	20.3	11190.6	0.17	95.13
154.0-154.5	840.6	20.0	11210.6	0.17	95.30
154.5-155.0	845.5	19.8	11230.4	0.17	95.47
155.0-155.5	849.9	19.5	11249.9	0.17	95.64
155.5-156.0	854.0	19.2	11269.1	0.16	95.80
156.0-156.5	857.9	18.9	11288.1	0.16	95.96
156.5-157.0	861.6	18.6	11306.7	0.16	96.12
157.0-157.5	865.2	18.3	11325.1	0.16	96.27
157.5-158.0	868.6	18.0	11343.1	0.15	96.43
158.0-158.5	872.0	17.7	11360.8	0.15	96.58
158.5-159.0	875.3	17.4	11378.2	0.15	96.73
159.0-159.5	878.5	17.1	11395.3	0.15	96.87
159.5-160.0	881.6	16.7	11412.0	0.14	97.01
160.0-160.5	884.5	16.4	11428.4	0.14	97.15
160.5-161.0	887.5	16.0	11444.5	0.14	97.29
161.0-161.5	890.6	15.7	11460.2	0.13	97.42
161.5-162.0	893.9	15.3	11475.5	0.13	97.55

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Zonal Lumen (Continue 9)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
162.0-162.5	897.2	15.0	11490.5	0.13	97.68
162.5-163.0	900.7	14.6	11505.1	0.12	97.80
163.0-163.5	904.2	14.3	11519.4	0.12	97.93
163.5-164.0	907.8	13.9	11533.4	0.12	98.04
164.0-164.5	911.4	13.6	11546.9	0.12	98.16
164.5-165.0	914.9	13.2	11560.1	0.11	98.27
165.0-165.5	918.5	12.8	11572.9	0.11	98.38
165.5-166.0	922.1	12.4	11585.4	0.11	98.49
166.0-166.5	925.6	12.1	11597.5	0.10	98.59
166.5-167.0	929.2	11.7	11609.1	0.10	98.69
167.0-167.5	932.9	11.3	11620.4	0.10	98.78
167.5-168.0	936.6	10.9	11631.3	0.09	98.88
168.0-168.5	940.3	10.5	11641.8	0.09	98.97
168.5-169.0	944.0	10.1	11651.9	0.09	99.05
169.0-169.5	947.7	9.7	11661.6	0.08	99.14
169.5-170.0	951.2	9.3	11670.9	0.08	99.21
170.0-170.5	954.4	8.9	11679.7	0.08	99.29
170.5-171.0	957.4	8.4	11688.2	0.07	99.36
171.0-171.5	960.2	8.0	11696.2	0.07	99.43
171.5-172.0	962.7	7.6	11703.8	0.06	99.49
172.0-172.5	965.0	7.1	11710.9	0.06	99.55
172.5-173.0	967.2	6.7	11717.6	0.06	99.61
173.0-173.5	969.3	6.2	11723.8	0.05	99.66
173.5-174.0	971.4	5.8	11729.6	0.05	99.71
174.0-174.5	973.3	5.3	11735.0	0.05	99.76
174.5-175.0	975.3	4.9	11739.9	0.04	99.80
175.0-175.5	977.1	4.4	11744.3	0.04	99.84
175.5-176.0	978.9	4.0	11748.3	0.03	99.87
176.0-176.5	980.5	3.5	11751.8	0.03	99.90
176.5-177.0	982.1	3.1	11754.9	0.03	99.93
177.0-177.5	983.6	2.6	11757.5	0.02	99.95
177.5-178.0	985.0	2.1	11759.6	0.02	99.97
178.0-178.5	986.4	1.7	11761.2	0.01	99.98
178.5-179.0	987.8	1.2	11762.4	0.01	99.99
179.0-179.5	989.1	0.7	11763.1	0.01	100.00
179.5-180.0	990.7	0.2	11763.4	0.00	100.00

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G0.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0
G0.5	4005.7	4004.6	4003.6	4002.5	4001.4	4000.3	3999.2	3998.5	3997.4	3996.7
G1.0	4006.4	4004.3	4002.1	4000.0	3998.2	3996.0	3994.2	3992.0	3990.2	3988.8
G1.5	4002.5	3999.6	3996.7	3993.8	3991.3	3988.8	3986.6	3984.5	3982.3	3980.5
G2.0	3998.9	3994.9	3991.3	3987.7	3984.5	3981.2	3978.4	3975.5	3973.0	3970.4
G2.5	3995.6	3991.0	3986.6	3982.0	3978.0	3974.0	3970.4	3966.8	3963.6	3960.7
G3.0	3992.8	3987.4	3981.6	3976.6	3971.5	3966.8	3962.2	3958.2	3954.6	3951.4
G3.5	3991.3	3984.5	3978.0	3971.9	3965.8	3960.0	3954.6	3949.6	3945.6	3941.6
G4.0	3989.9	3982.0	3974.4	3967.2	3960.0	3953.5	3947.0	3941.6	3936.2	3931.9
G4.5	3985.6	3977.3	3969.0	3961.1	3953.9	3946.7	3939.8	3933.4	3927.6	3922.6
G5.0	3981.6	3972.2	3963.2	3955.0	3946.7	3939.1	3931.9	3925.1	3918.6	3912.8
G5.5	3975.1	3965.0	3956.0	3947.0	3939.1	3931.6	3923.6	3916.4	3909.6	3903.1
G6.0	3968.6	3958.2	3948.1	3938.8	3930.5	3922.2	3915.0	3907.8	3900.6	3893.8
G6.5	3962.2	3951.0	3940.6	3930.5	3921.5	3913.2	3905.3	3898.1	3891.6	3884.4
G7.0	3956.0	3943.8	3932.6	3922.2	3912.5	3903.5	3895.9	3888.4	3881.5	3875.0
G7.5	3949.2	3936.6	3924.4	3913.2	3903.1	3894.1	3885.8	3878.6	3871.4	3863.9
G8.0	3942.7	3929.0	3916.1	3904.6	3893.8	3884.0	3875.4	3867.8	3860.6	3852.0
G8.5	3934.1	3920.0	3906.7	3894.8	3884.0	3874.0	3865.0	3857.4	3848.0	3840.1
G9.0	3925.8	3911.0	3897.4	3884.8	3873.6	3863.5	3854.5	3845.5	3835.8	3827.2
G9.5	3913.2	3898.4	3885.5	3874.0	3863.2	3852.7	3843.7	3832.9	3822.8	3814.2
G10.0	3900.6	3885.8	3872.9	3861.4	3851.3	3841.6	3832.2	3820.0	3809.5	3800.9
G10.5	3888.7	3873.6	3860.3	3848.8	3839.0	3829.7	3819.2	3806.6	3795.8	3787.2
G11.0	3876.8	3861.0	3847.0	3835.4	3825.7	3818.2	3805.6	3793.0	3782.2	3773.2
G11.5	3866.0	3849.1	3834.4	3822.1	3812.0	3804.5	3791.5	3778.6	3768.1	3759.1
G12.0	3855.2	3837.2	3821.8	3808.4	3798.0	3789.4	3775.3	3763.4	3753.4	3744.4
G12.5	3840.8	3823.2	3807.7	3794.8	3784.0	3772.8	3758.4	3747.2	3737.5	3730.0
G13.0	3826.4	3808.8	3793.3	3780.4	3769.9	3755.9	3741.5	3730.0	3722.0	3714.8
G13.5	3811.0	3793.0	3778.2	3766.3	3755.9	3739.3	3724.2	3712.7	3704.4	3698.3
G14.0	3795.1	3777.1	3762.4	3750.5	3741.1	3722.8	3706.6	3694.7	3686.8	3681.7
G14.5	3780.0	3761.3	3746.2	3734.6	3724.9	3705.8	3689.3	3677.0	3668.8	3667.3
G15.0	3765.2	3745.8	3730.0	3718.1	3706.9	3687.1	3671.6	3658.7	3650.4	3652.6
G15.5	3748.3	3728.9	3713.4	3701.5	3688.2	3668.8	3652.6	3640.7	3633.5	3638.2
G16.0	3731.8	3712.0	3696.5	3684.6	3669.1	3649.0	3633.5	3622.0	3618.0	3623.8
G16.5	3712.3	3693.2	3678.8	3668.0	3650.0	3629.5	3613.7	3602.2	3602.5	3609.0
G17.0	3693.2	3674.2	3660.1	3650.0	3630.6	3609.4	3593.7	3582.6	3587.1	3594.2
G17.5	3672.7	3654.4	3641.0	3632.0	3610.1	3589.1	3573.5	3565.4	3571.3	3579.0
G18.0	3652.6	3634.2	3620.9	3612.6	3589.2	3568.0	3552.4	3548.6	3555.5	3563.8

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G18.5	3633.1	3614.0	3600.7	3593.1	3567.1	3546.1	3531.2	3531.9	3539.8	3548.5
G19.0	3613.7	3594.0	3580.5	3571.5	3544.5	3523.8	3508.9	3514.3	3523.8	3533.4
G19.5	3592.9	3573.4	3560.0	3548.8	3521.5	3500.7	3486.8	3496.9	3507.9	3518.5
G20.0	3572.4	3552.8	3539.4	3526.1	3498.2	3477.5	3467.6	3478.9	3491.6	3503.8
G20.5	3549.1	3530.4	3518.5	3503.4	3474.8	3453.7	3448.1	3460.8	3474.9	3488.6
G21.0	3525.7	3507.8	3496.6	3480.1	3451.0	3430.0	3428.7	3442.7	3458.3	3471.4
G21.5	3502.4	3484.5	3474.5	3456.3	3426.9	3405.6	3409.1	3424.2	3441.3	3452.0
G22.0	3479.0	3461.2	3451.3	3431.7	3402.1	3381.1	3389.5	3405.9	3424.2	3431.5
G22.5	3456.2	3438.2	3428.3	3406.4	3377.1	3355.8	3369.4	3387.3	3407.2	3410.9
G23.0	3433.4	3415.2	3405.3	3381.0	3351.4	3333.0	3349.3	3368.7	3386.3	3390.0
G23.5	3410.2	3392.0	3382.3	3355.4	3325.9	3311.3	3328.8	3350.1	3364.2	3368.7
G24.0	3387.0	3368.7	3359.2	3329.8	3299.7	3289.8	3308.1	3330.9	3341.8	3347.4
G24.5	3360.2	3343.8	3335.9	3304.0	3273.6	3268.2	3287.5	3311.8	3318.8	3325.9
G25.0	3333.5	3318.5	3312.3	3278.1	3247.2	3246.2	3266.9	3292.4	3295.7	3304.0
G25.5	3306.0	3292.1	3288.3	3251.6	3220.8	3224.5	3246.4	3268.2	3271.9	3282.0
G26.0	3278.3	3265.3	3262.7	3224.7	3193.5	3202.3	3225.9	3243.5	3247.8	3259.8
G26.5	3253.3	3239.1	3236.9	3195.9	3165.8	3180.1	3205.4	3218.8	3223.7	3236.7
G27.0	3228.2	3213.1	3209.0	3167.1	3137.1	3157.5	3184.8	3194.2	3199.5	3213.5
G27.5	3202.5	3187.3	3180.1	3138.0	3109.5	3134.7	3163.5	3169.3	3175.4	3190.1
G28.0	3176.8	3161.6	3152.5	3108.9	3084.5	3111.8	3142.3	3144.1	3151.3	3166.3
G28.5	3147.7	3134.7	3124.9	3080.5	3059.7	3088.5	3117.7	3118.7	3127.3	3142.8
G29.0	3118.6	3107.5	3096.9	3052.2	3035.1	3065.5	3091.3	3092.5	3103.3	3119.4
G29.5	3088.8	3079.0	3068.9	3022.8	3010.5	3041.7	3064.6	3066.3	3078.8	3096.2
G30.0	3059.0	3050.2	3038.4	2993.1	2985.8	3018.0	3037.6	3040.2	3053.9	3073.1
G30.5	3030.7	3021.5	3008.0	2962.3	2960.2	2994.0	3010.1	3014.4	3029.4	3050.0
G31.0	3002.5	2992.9	2976.9	2931.2	2934.8	2970.0	2981.2	2988.6	3005.0	3027.3
G31.5	2973.9	2964.5	2945.9	2900.0	2908.7	2946.2	2952.2	2961.5	2980.5	3004.7
G32.0	2945.4	2936.3	2915.5	2868.9	2882.8	2922.8	2923.2	2934.0	2956.3	2982.3
G32.5	2915.1	2907.6	2885.3	2838.1	2856.8	2897.9	2894.4	2906.3	2932.3	2959.7
G33.0	2884.8	2878.8	2854.8	2807.3	2830.8	2868.3	2865.7	2879.5	2908.4	2937.6
G33.5	2854.0	2849.3	2824.2	2776.2	2804.8	2838.6	2837.1	2852.9	2884.5	2913.4
G34.0	2823.2	2819.6	2792.7	2744.8	2778.8	2807.9	2808.5	2826.9	2860.6	2878.1
G34.5	2793.3	2789.9	2761.0	2715.0	2752.9	2777.2	2778.9	2801.1	2837.2	2842.7
G35.0	2763.6	2760.0	2729.0	2687.0	2727.1	2746.4	2749.3	2775.3	2813.9	2807.4
G35.5	2732.8	2730.3	2696.9	2659.1	2701.3	2715.7	2719.2	2749.8	2789.7	2772.3
G36.0	2701.9	2700.6	2665.0	2631.2	2675.4	2685.2	2688.7	2724.5	2764.8	2737.4
G36.5	2669.9	2670.4	2633.1	2603.3	2649.8	2654.9	2660.9	2699.2	2728.2	2702.8

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G37.0	2637.8	2640.0	2601.0	2575.4	2623.6	2624.6	2634.0	2674.0	2690.8	2668.1
G37.5	2607.4	2609.6	2568.8	2547.5	2597.5	2593.8	2607.1	2649.1	2653.7	2633.2
G38.0	2576.9	2579.3	2536.5	2519.7	2571.0	2563.0	2580.6	2623.9	2617.1	2598.2
G38.5	2547.4	2549.5	2504.2	2492.0	2539.7	2531.4	2554.2	2598.9	2581.1	2562.6
G39.0	2517.8	2520.0	2472.3	2464.8	2507.7	2499.6	2528.0	2574.0	2545.2	2526.2
G39.5	2486.6	2490.6	2440.6	2437.6	2476.0	2467.8	2501.7	2539.2	2509.5	2493.8
G40.0	2455.4	2461.4	2408.8	2410.6	2444.6	2436.4	2475.7	2501.8	2473.7	2465.0
G40.5	2422.9	2431.4	2377.0	2383.6	2413.3	2405.2	2449.5	2464.8	2437.9	2436.7
G41.0	2390.5	2401.2	2344.7	2356.5	2382.0	2376.9	2423.4	2428.2	2401.8	2408.6
G41.5	2359.8	2370.6	2312.0	2329.3	2350.4	2350.3	2397.5	2391.9	2365.4	2380.6
G42.0	2329.1	2339.8	2279.4	2302.2	2318.7	2323.2	2371.2	2355.8	2330.1	2353.0
G42.5	2299.1	2309.7	2247.1	2275.1	2287.3	2296.3	2344.9	2319.9	2301.7	2325.5
G43.0	2269.3	2280.2	2215.1	2248.1	2255.9	2269.5	2319.1	2284.0	2273.4	2298.2
G43.5	2237.3	2250.8	2183.3	2221.2	2224.5	2242.7	2282.3	2247.4	2245.5	2271.1
G44.0	2205.3	2221.7	2151.3	2194.5	2193.2	2216.1	2245.7	2210.8	2217.9	2244.2
G44.5	2173.2	2191.8	2118.6	2168.1	2161.7	2189.8	2210.1	2174.2	2190.5	2217.7
G45.0	2141.0	2161.3	2085.9	2141.7	2130.4	2163.6	2174.6	2137.9	2163.3	2187.5
G45.5	2110.9	2129.1	2053.8	2115.4	2099.0	2137.7	2138.8	2106.8	2136.3	2154.2
G46.0	2080.8	2096.5	2025.4	2089.0	2067.4	2112.0	2102.7	2079.1	2109.7	2121.0
G46.5	2051.9	2064.8	1997.7	2056.8	2035.9	2086.6	2066.7	2052.2	2083.3	2088.0
G47.0	2022.9	2033.7	1970.2	2024.7	2006.2	2061.4	2030.7	2025.3	2057.1	2054.7
G47.5	1993.0	2003.1	1943.4	1992.8	1979.1	2036.4	1994.9	1998.5	2030.4	2021.4
G48.0	1963.1	1973.0	1916.6	1960.9	1952.4	2007.5	1959.4	1972.0	1997.3	1988.1
G48.5	1932.2	1942.5	1889.8	1929.3	1925.9	1971.6	1924.1	1945.7	1964.2	1955.1
G49.0	1901.2	1911.8	1863.1	1898.0	1899.5	1935.7	1889.0	1919.7	1930.6	1922.4
G49.5	1871.6	1880.9	1836.4	1867.0	1873.4	1899.6	1860.4	1893.8	1897.1	1889.9
G50.0	1842.1	1849.7	1809.8	1836.3	1847.6	1863.8	1833.9	1868.3	1863.8	1859.3
G50.5	1813.0	1818.8	1783.5	1805.9	1822.0	1828.3	1807.6	1843.0	1830.9	1834.1
G51.0	1783.9	1788.3	1757.4	1775.7	1796.7	1793.1	1781.2	1812.8	1798.3	1809.0
G51.5	1754.4	1758.0	1731.2	1745.6	1771.7	1758.2	1755.3	1779.8	1766.0	1784.2
G52.0	1725.0	1727.8	1705.2	1715.1	1746.9	1723.5	1729.7	1746.9	1734.0	1759.6
G52.5	1696.0	1697.8	1679.4	1684.6	1722.5	1689.0	1704.1	1714.0	1702.3	1735.1
G53.0	1667.0	1667.8	1653.6	1653.8	1698.6	1654.6	1678.8	1681.4	1677.2	1710.8
G53.5	1638.7	1638.0	1628.5	1623.0	1675.0	1620.3	1653.8	1649.2	1653.0	1686.9
G54.0	1610.5	1608.5	1603.6	1593.3	1646.6	1589.9	1629.1	1617.3	1629.0	1663.4
G54.5	1582.2	1579.1	1579.0	1563.8	1613.3	1564.8	1604.1	1585.8	1605.3	1639.9
G55.0	1554.0	1549.9	1554.6	1538.6	1579.3	1540.0	1571.8	1554.3	1581.9	1611.9

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 3)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G55.5	1526.2	1520.9	1530.4	1514.4	1545.2	1515.8	1540.0	1522.6	1558.6	1579.8
G56.0	1498.4	1491.9	1506.3	1490.3	1511.3	1491.8	1508.5	1496.6	1535.6	1547.7
G56.5	1471.0	1463.1	1482.5	1466.5	1477.7	1468.0	1477.2	1473.2	1512.9	1515.6
G57.0	1443.6	1434.6	1458.9	1442.9	1444.5	1444.5	1445.9	1450.0	1490.7	1483.7
G57.5	1416.5	1406.2	1430.5	1419.6	1412.0	1421.4	1414.9	1427.1	1463.5	1452.0
G58.0	1389.3	1377.8	1401.7	1396.4	1379.7	1398.5	1383.9	1404.5	1431.3	1420.5
G58.5	1362.5	1349.3	1373.1	1373.7	1347.6	1375.8	1353.2	1382.3	1399.3	1389.2
G59.0	1335.7	1320.8	1344.6	1351.2	1315.5	1351.6	1322.6	1360.2	1367.6	1358.4
G59.5	1308.9	1292.4	1316.1	1329.0	1286.1	1320.6	1297.5	1338.3	1336.5	1329.8
G60.0	1282.1	1264.2	1287.1	1307.1	1263.0	1289.7	1276.1	1316.8	1305.6	1305.2
G60.5	1256.4	1236.3	1257.9	1285.5	1240.3	1259.2	1254.7	1289.2	1274.9	1280.7
G61.0	1230.7	1209.1	1229.1	1263.6	1217.9	1229.1	1233.8	1258.6	1244.4	1256.3
G61.5	1205.0	1181.8	1200.4	1231.8	1195.7	1199.2	1213.1	1228.2	1213.9	1232.0
G62.0	1179.4	1154.4	1172.5	1199.7	1173.9	1169.4	1192.6	1198.0	1187.9	1208.0
G62.5	1152.8	1127.0	1144.8	1167.5	1152.4	1140.0	1172.6	1167.8	1164.1	1184.2
G63.0	1126.2	1099.0	1117.0	1135.3	1131.2	1110.8	1152.9	1137.8	1140.6	1160.5
G63.5	1099.9	1070.9	1089.1	1103.5	1110.3	1085.8	1132.2	1107.7	1117.2	1137.0
G64.0	1073.5	1045.9	1060.8	1072.3	1089.3	1065.7	1102.1	1077.7	1094.0	1110.0
G64.5	1048.0	1022.8	1032.4	1041.7	1059.7	1046.0	1071.9	1050.6	1071.1	1081.5
G65.0	1022.6	1000.3	1010.6	1011.2	1030.1	1026.5	1041.9	1028.0	1048.5	1053.0
G65.5	997.6	978.0	989.3	980.6	1000.6	1007.3	1012.1	1005.8	1026.0	1024.5
G66.0	972.6	955.9	968.3	952.7	971.3	988.5	982.3	983.8	1000.8	996.0
G66.5	948.0	934.1	948.0	931.9	942.3	969.9	952.7	962.1	972.6	967.7
G67.0	923.3	912.4	927.8	911.4	913.5	951.5	923.2	940.4	944.6	939.6
G67.5	898.7	890.8	908.0	891.5	885.2	923.8	898.1	919.0	916.8	911.5
G68.0	874.1	869.7	888.5	872.1	860.5	894.3	877.1	897.9	889.4	885.6
G68.5	849.7	848.6	869.3	852.9	842.4	865.1	856.3	872.1	862.1	862.6
G69.0	825.4	828.0	850.4	834.5	824.6	836.1	835.7	845.1	834.9	839.7
G69.5	801.4	807.7	831.7	816.3	807.2	807.2	815.3	818.2	808.0	817.0
G70.0	777.5	787.8	803.4	792.5	790.1	778.5	795.2	791.4	784.7	794.4
G70.5	753.8	768.1	773.7	764.4	773.4	750.5	775.4	764.7	762.9	771.9
G71.0	730.2	748.8	744.5	736.4	757.0	730.9	751.7	738.1	741.2	749.6
G71.5	706.8	729.8	715.4	708.6	731.2	711.8	725.2	711.7	719.8	727.3
G72.0	683.3	711.1	686.6	680.9	702.6	692.9	698.9	689.0	698.5	704.6
G72.5	660.3	685.5	657.9	653.4	674.2	674.2	672.6	668.4	677.3	681.4
G73.0	637.3	659.9	629.5	629.4	645.9	655.9	646.5	648.0	656.4	658.2
G73.5	614.5	634.2	606.7	614.0	617.8	637.9	620.6	627.8	634.8	635.1

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 4)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G74.0	591.7	608.6	590.1	599.1	590.1	612.5	596.2	607.8	612.1	612.1
G74.5	567.9	583.2	573.9	584.7	572.5	587.1	577.0	588.0	589.4	589.1
G75.0	544.0	557.7	558.4	570.6	555.2	561.7	558.1	568.4	566.9	566.2
G75.5	519.4	532.3	542.8	556.8	538.2	536.4	539.4	546.3	544.4	543.4
G76.0	494.9	506.7	527.8	527.1	521.5	511.2	520.8	524.1	521.9	525.3
G76.5	471.9	481.0	499.2	497.3	505.2	489.3	502.5	501.9	499.5	508.0
G77.0	448.9	464.1	467.6	467.2	479.9	471.9	483.5	479.9	479.1	490.7
G77.5	426.8	447.8	435.3	437.0	453.9	454.6	461.8	458.0	462.2	473.5
G78.0	404.7	432.3	402.6	413.1	427.8	437.7	440.2	436.1	445.6	456.4
G78.5	382.5	416.8	376.7	395.3	401.4	421.0	418.7	417.6	428.9	439.4
G79.0	360.3	402.2	362.8	377.8	377.6	403.0	397.3	401.5	412.4	422.5
G79.5	338.4	384.2	349.2	361.0	361.2	381.3	376.1	385.5	396.0	404.5
G80.0	316.5	348.7	335.7	337.2	345.5	359.7	358.5	369.6	379.6	385.4
G80.5	296.2	312.2	307.5	306.9	330.4	338.1	343.2	353.8	361.9	366.3
G81.0	276.0	274.7	273.7	276.7	314.0	316.7	328.0	338.1	343.1	347.2
G81.5	258.0	240.4	240.6	246.4	288.4	298.8	312.9	321.1	324.4	328.2
G82.0	240.1	226.5	220.2	229.8	262.9	284.6	298.0	302.7	305.7	309.3
G82.5	222.9	213.6	209.9	214.0	237.3	270.5	282.2	284.4	287.1	290.3
G83.0	205.8	199.3	201.6	198.5	214.6	256.7	264.2	266.1	268.5	271.8
G83.5	189.1	167.6	178.0	178.6	204.1	243.0	246.3	247.9	250.0	254.4
G84.0	172.3	138.2	152.3	157.6	194.4	225.4	228.4	229.8	233.0	237.1
G84.5	156.3	128.1	134.7	137.3	185.0	207.6	210.6	212.7	216.2	219.8
G85.0	140.4	123.2	127.5	127.6	171.5	189.8	193.0	196.5	199.5	202.5
G85.5	125.5	105.1	118.8	120.9	153.6	172.2	177.4	180.3	182.7	185.3
G86.0	110.6	92.7	102.6	114.2	136.1	156.2	161.9	164.1	166.0	168.1
G86.5	97.2	91.8	89.4	102.4	118.9	141.7	146.4	148.0	149.4	150.8
G87.0	83.7	75.4	84.6	90.5	107.7	127.3	130.9	132.0	132.4	132.9
G87.5	70.4	70.7	77.8	79.7	97.2	112.9	115.5	115.3	115.0	115.0
G88.0	57.0	61.4	66.7	71.9	87.0	98.3	99.2	98.4	97.6	97.2
G88.5	45.8	55.0	58.1	64.1	75.7	82.6	82.8	81.6	80.3	79.3
G89.0	34.6	47.1	52.1	55.3	62.7	67.0	66.5	64.8	62.9	61.5
G89.5	26.3	41.2	44.2	45.8	49.9	51.4	50.2	47.9	45.6	43.6
G90.0	20.0	37.8	39.7	40.3	41.2	39.8	37.6	34.6	31.3	28.7
G90.5	40.5	55.0	63.9	67.4	69.8	68.1	65.3	61.0	56.2	52.1
G91.0	36.6	44.5	59.0	65.1	68.2	67.5	65.6	62.3	58.2	54.6
G91.5	34.8	34.6	53.5	62.5	66.7	66.8	65.8	63.5	60.2	57.1
G92.0	33.0	26.9	48.6	59.4	65.2	66.2	66.1	64.7	62.2	59.6

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 5)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G92.5	33.1	25.0	44.1	56.4	63.7	65.6	66.4	66.0	64.2	62.1
G93.0	33.1	25.6	39.3	54.4	62.2	65.0	66.6	67.2	66.2	64.7
G93.5	33.7	26.6	34.3	52.9	60.8	64.4	66.8	68.5	68.3	67.2
G94.0	34.2	27.2	32.4	51.4	59.6	63.9	67.1	69.7	70.3	69.7
G94.5	35.4	28.0	31.6	48.4	58.4	63.5	67.4	71.0	72.3	72.2
G95.0	36.5	29.7	31.9	45.5	57.2	63.3	67.7	72.3	74.4	74.7
G95.5	37.5	30.4	32.4	43.7	55.9	63.1	68.6	73.7	76.5	77.2
G96.0	38.6	31.3	34.0	45.2	54.4	63.0	69.5	75.2	78.6	79.7
G96.5	39.9	34.2	36.7	46.6	53.0	62.9	70.5	77.1	80.7	82.3
G97.0	41.1	37.3	39.4	47.9	51.7	62.3	71.6	79.0	83.1	84.8
G97.5	42.5	38.7	40.1	49.1	52.7	61.8	72.7	80.9	85.5	87.6
G98.0	43.8	39.8	40.7	50.5	54.3	61.3	73.1	82.9	88.0	90.4
G98.5	45.1	41.0	42.7	52.0	56.1	60.9	73.4	85.0	90.4	93.3
G99.0	46.5	44.8	46.6	55.8	57.9	62.0	73.8	86.6	92.9	96.2
G99.5	48.7	49.3	50.7	59.6	60.6	64.6	74.2	87.9	95.4	99.1
G100.0	50.9	54.3	54.3	63.4	63.5	67.3	74.7	89.2	97.7	102.0
G100.5	54.1	59.7	56.5	66.4	66.6	70.0	76.4	90.6	99.7	105.0
G101.0	57.4	62.6	58.8	68.2	69.7	72.9	80.1	92.0	101.8	107.7
G101.5	61.0	65.4	61.3	70.3	74.2	76.3	83.9	93.5	103.9	110.2
G102.0	64.7	68.1	66.0	72.7	79.5	80.0	87.7	96.2	106.0	112.7
G102.5	68.6	71.3	72.2	76.6	84.8	83.7	91.6	100.4	108.1	115.2
G103.0	72.6	74.5	78.7	82.2	90.2	87.5	95.5	104.7	110.3	117.7
G103.5	77.3	78.2	85.3	88.1	95.4	91.4	99.5	109.0	114.0	120.3
G104.0	82.0	84.1	91.5	94.2	98.8	96.3	103.5	113.3	118.3	122.9
G104.5	87.4	90.0	94.9	100.5	102.2	101.9	107.5	117.6	122.7	125.8
G105.0	92.8	95.9	98.5	103.9	105.8	107.7	111.6	121.9	127.1	130.5
G105.5	97.8	101.9	102.2	107.3	109.6	113.6	115.8	126.2	131.6	135.3
G106.0	102.7	108.1	106.0	110.7	113.3	119.6	120.0	130.5	136.1	140.1
G106.5	107.2	114.2	109.9	114.3	119.4	125.5	125.7	134.8	140.7	144.9
G107.0	111.8	120.1	115.2	118.0	125.6	129.6	131.8	139.2	145.3	149.7
G107.5	116.5	126.0	121.9	123.9	131.8	133.8	138.0	143.6	150.1	154.6
G108.0	121.2	131.7	128.7	130.7	138.2	138.0	144.3	148.2	154.9	159.6
G108.5	126.2	135.8	135.5	137.4	144.6	142.2	150.6	153.3	159.8	164.7
G109.0	131.1	140.0	142.4	144.0	150.5	146.5	156.9	159.5	164.7	170.0
G109.5	136.4	144.3	149.5	150.4	154.2	150.9	162.5	165.8	169.7	175.4
G110.0	141.6	148.8	156.6	156.9	158.0	157.4	167.0	172.1	174.7	180.9
G110.5	147.2	153.3	163.3	162.4	162.0	164.0	171.5	178.5	180.2	186.4

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 6)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G111.0	152.7	158.1	167.6	166.6	166.1	170.7	176.1	184.9	186.8	191.9
G111.5	158.5	162.8	172.0	170.9	170.3	177.5	180.7	191.4	193.4	197.6
G112.0	164.2	167.8	176.4	175.4	174.6	184.3	185.4	197.5	200.1	203.2
G112.5	170.1	172.7	180.9	179.9	180.6	191.2	190.2	202.3	206.9	209.8
G113.0	175.9	177.8	185.5	184.7	187.5	197.7	196.1	207.2	213.8	217.0
G113.5	181.9	183.0	190.4	189.6	194.6	202.3	203.1	212.1	220.7	224.2
G114.0	187.9	188.3	195.2	194.6	201.8	207.0	210.1	217.2	227.8	231.5
G114.5	194.1	193.6	200.3	201.5	209.1	211.9	217.2	222.3	233.9	238.9
G115.0	200.3	199.1	205.5	209.1	216.6	216.9	224.4	227.5	239.3	246.3
G115.5	206.9	204.7	210.9	216.8	224.1	222.0	231.6	232.8	244.8	253.7
G116.0	213.4	210.4	218.0	224.6	231.8	227.2	238.9	239.3	250.4	261.2
G116.5	220.2	216.7	225.3	232.6	237.2	232.6	246.4	246.7	256.0	268.2
G117.0	226.9	223.9	232.5	240.8	242.6	239.4	252.2	254.2	261.8	274.2
G117.5	233.8	231.1	239.8	249.1	248.2	247.6	257.9	261.8	267.6	280.3
G118.0	240.8	238.6	247.2	257.6	253.9	255.9	263.7	269.4	273.5	286.4
G118.5	248.1	246.0	254.7	266.3	259.7	264.3	269.6	277.1	280.2	292.6
G119.0	255.4	253.6	262.4	274.9	265.7	272.8	275.7	284.9	288.3	298.9
G119.5	262.9	261.2	270.3	281.0	271.8	281.5	281.9	292.9	296.5	305.2
G120.0	270.4	269.1	278.5	286.9	278.1	290.3	288.2	300.5	304.8	311.6
G120.5	278.1	277.0	286.7	293.0	284.6	299.3	294.7	307.1	313.1	318.1
G121.0	285.9	285.3	295.0	299.3	293.2	308.5	302.3	313.8	321.6	325.9
G121.5	294.0	293.6	303.3	305.8	302.7	315.7	311.4	320.6	330.2	334.5
G122.0	302.1	302.2	311.7	312.3	312.5	322.5	320.7	327.5	338.8	343.1
G122.5	310.6	310.7	320.2	319.2	322.3	329.5	330.1	334.5	347.6	351.9
G123.0	319.1	319.4	328.7	326.2	332.3	336.5	339.6	341.6	355.5	360.7
G123.5	327.8	328.1	335.9	333.4	342.6	343.7	349.2	348.8	362.5	369.5
G124.0	336.4	336.9	343.4	340.8	352.9	351.1	358.9	356.1	369.7	378.4
G124.5	345.1	345.8	351.0	348.4	363.5	358.6	368.8	364.2	376.9	387.4
G125.0	353.8	355.0	358.8	356.2	374.1	366.3	378.8	374.1	384.2	396.4
G125.5	362.8	364.3	366.7	364.3	384.9	374.0	388.9	384.1	391.5	404.6
G126.0	371.8	373.8	374.7	374.0	395.9	381.9	396.7	394.1	399.0	411.9
G126.5	381.1	383.4	382.9	383.8	405.3	391.6	404.4	404.1	406.5	419.4
G127.0	390.4	393.1	391.1	393.8	413.0	402.4	412.3	414.2	414.0	426.8
G127.5	399.8	402.9	399.6	403.8	420.8	413.3	420.2	424.4	421.9	434.3
G128.0	409.2	412.9	408.0	413.8	428.7	424.4	428.2	434.7	431.8	441.8
G128.5	418.9	423.0	416.7	423.9	436.7	435.5	436.3	445.0	441.9	449.3
G129.0	428.6	433.2	425.3	434.1	444.8	446.7	444.5	455.3	451.9	456.9

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 7)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G129.5	438.5	443.4	434.1	444.3	453.0	458.0	452.9	464.8	462.1	464.5
G130.0	448.5	453.6	442.8	454.5	461.3	469.3	461.1	472.8	472.2	472.2
G130.5	458.5	463.7	451.6	464.7	469.6	480.7	469.5	480.7	482.3	481.6
G131.0	468.6	473.8	460.4	474.9	478.1	492.3	478.4	488.7	492.4	491.5
G131.5	478.3	484.0	469.2	485.3	486.6	503.7	489.3	496.9	502.6	501.4
G132.0	488.0	494.1	478.1	495.6	495.1	515.0	500.3	505.0	512.6	511.1
G132.5	497.9	504.3	487.0	505.9	503.7	524.0	511.4	513.2	522.7	520.9
G133.0	507.9	514.5	496.0	516.1	512.3	531.6	522.6	521.5	530.8	530.6
G133.5	517.7	524.8	505.0	526.2	521.7	539.4	533.8	529.8	538.8	540.3
G134.0	527.5	535.1	514.1	536.3	531.7	547.2	544.9	538.2	546.8	549.9
G134.5	537.5	545.3	523.2	544.6	541.6	555.0	556.1	546.6	554.8	559.6
G135.0	547.5	555.2	533.4	552.9	551.2	563.0	567.2	556.0	562.8	569.2
G135.5	557.5	564.3	543.5	560.9	560.7	571.0	578.2	566.8	570.9	577.9
G136.0	567.5	573.5	553.5	568.9	570.1	579.0	589.3	577.4	579.0	585.5
G136.5	576.9	582.5	563.4	576.8	579.5	587.1	600.3	588.0	587.1	593.2
G137.0	586.3	591.4	573.2	584.7	588.9	595.2	611.3	598.6	595.3	600.8
G137.5	595.5	600.2	582.8	592.6	598.3	603.3	618.7	609.1	603.5	608.5
G138.0	604.8	608.8	592.3	600.6	607.8	611.3	625.9	619.7	611.6	616.1
G138.5	613.7	617.3	601.6	608.5	617.2	619.4	633.3	630.3	621.2	623.8
G139.0	622.5	625.9	610.9	616.6	626.5	627.4	640.4	641.0	631.1	631.4
G139.5	631.2	634.5	620.3	624.6	635.5	635.8	647.6	651.6	641.0	639.1
G140.0	639.9	643.2	629.7	632.5	644.6	644.5	654.9	661.8	650.9	646.7
G140.5	648.8	651.8	639.0	640.5	653.5	653.2	662.2	671.8	660.7	654.4
G141.0	657.6	660.4	648.3	648.2	662.3	661.7	669.5	681.0	670.4	662.9
G141.5	666.4	668.9	657.5	656.0	670.9	670.0	676.9	687.5	680.0	672.4
G142.0	675.2	677.2	666.5	663.7	679.2	678.3	684.3	694.0	689.5	681.9
G142.5	683.7	685.5	675.4	671.3	686.0	686.4	691.6	700.6	699.1	691.3
G143.0	692.3	693.6	684.1	678.8	692.8	694.6	698.9	707.0	708.6	700.7
G143.5	700.6	701.5	692.7	686.2	699.5	702.6	706.2	713.5	718.2	709.9
G144.0	708.9	709.4	701.0	693.5	706.5	710.6	713.0	720.0	727.7	719.0
G144.5	716.8	717.1	709.4	700.7	713.3	718.3	720.1	726.3	734.1	728.1
G145.0	724.7	724.7	717.6	707.8	720.0	725.8	727.2	732.8	740.3	737.1
G145.5	732.3	732.3	725.8	715.1	726.5	733.1	734.3	739.1	746.3	746.0
G146.0	739.8	740.0	733.9	722.8	732.8	740.4	741.3	745.4	752.2	755.0
G146.5	747.8	747.5	741.9	731.0	738.9	747.6	748.1	751.7	758.2	763.8
G147.0	755.7	754.8	749.3	738.6	745.1	754.7	754.9	758.1	764.0	769.9
G147.5	763.1	761.7	756.6	746.1	751.2	761.7	761.5	764.5	769.9	775.5

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 8)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G148.0	770.5	768.4	763.8	753.4	757.3	767.4	768.1	771.0	775.9	781.0
G148.5	776.8	774.9	771.0	760.6	763.3	772.8	774.6	777.5	781.7	786.5
G149.0	783.2	781.4	778.2	767.9	769.5	778.2	781.2	783.8	787.6	792.1
G149.5	789.8	788.0	785.3	775.1	775.3	783.6	787.8	789.8	793.4	797.6
G150.0	796.4	794.7	792.3	782.2	781.2	789.0	794.1	795.7	799.2	803.1
G150.5	803.2	801.3	799.2	789.1	786.8	794.5	800.4	801.7	805.1	808.5
G151.0	810.0	807.7	805.6	795.9	792.4	799.9	806.5	807.5	810.5	814.1
G151.5	816.4	813.9	812.0	802.3	798.0	805.1	812.5	813.3	815.9	819.5
G152.0	822.9	819.9	818.4	808.8	803.7	810.3	818.1	818.9	821.2	825.0
G152.5	828.8	825.8	824.7	815.2	809.2	815.5	822.7	824.4	826.5	830.5
G153.0	834.7	831.6	830.9	821.7	815.4	820.6	827.4	829.9	831.9	835.8
G153.5	840.4	837.5	836.9	828.0	821.8	825.6	831.9	835.3	837.1	840.8
G154.0	846.2	843.2	842.4	834.3	827.9	830.6	836.4	840.6	842.3	845.8
G154.5	851.9	848.9	848.0	840.4	834.1	835.6	840.8	846.0	847.4	850.7
G155.0	857.6	854.5	853.4	846.4	840.0	840.4	845.3	851.2	852.5	855.5
G155.5	863.3	860.0	858.8	852.2	846.0	845.2	849.6	855.2	857.5	860.3
G156.0	868.9	865.5	864.0	857.9	851.6	849.8	854.0	859.3	862.4	864.9
G156.5	874.3	870.8	869.2	863.4	857.2	854.3	858.3	863.4	867.2	869.6
G157.0	879.7	876.0	874.0	868.7	862.5	858.8	862.6	867.4	872.1	874.1
G157.5	884.7	880.9	878.7	873.9	867.8	863.5	866.8	871.2	876.6	878.6
G158.0	889.7	885.7	883.3	878.9	872.9	868.7	871.0	875.1	880.2	883.0
G158.5	894.3	890.3	887.8	883.9	878.0	873.9	875.0	878.9	883.7	887.4
G159.0	898.8	894.8	892.2	888.8	883.0	878.9	879.1	882.8	887.2	891.6
G159.5	903.1	899.1	896.6	893.6	887.8	883.8	883.1	886.5	890.7	895.2
G160.0	907.4	903.5	900.8	898.1	892.5	888.5	886.9	890.3	894.1	898.4
G160.5	911.6	907.6	905.0	902.6	897.1	893.2	890.8	893.9	897.5	901.3
G161.0	915.8	911.8	908.9	906.9	901.7	897.8	895.4	897.5	900.8	904.2
G161.5	919.5	915.6	912.8	911.1	906.2	902.3	899.9	901.0	904.1	907.2
G162.0	923.1	919.3	916.6	915.0	910.5	906.7	904.3	904.4	907.2	910.0
G162.5	926.7	923.1	920.4	918.8	914.8	911.0	908.6	907.9	910.4	912.9
G163.0	930.3	926.7	924.1	922.4	918.8	915.2	912.7	911.4	913.5	915.7
G163.5	933.9	930.3	927.7	925.9	922.8	919.3	916.8	915.4	916.4	918.4
G164.0	937.4	933.9	931.2	929.3	926.7	923.2	920.8	919.3	919.3	921.0
G164.5	940.6	937.1	934.5	932.7	930.5	927.1	924.5	922.9	922.1	923.6
G165.0	943.7	940.4	937.7	935.9	934.3	930.7	928.2	926.2	925.2	926.3
G165.5	946.7	943.5	941.0	939.2	937.5	934.1	931.4	929.6	928.5	929.0
G166.0	949.7	946.5	944.0	942.0	940.4	937.2	934.6	932.8	931.8	931.7

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 9)

Unit: cd

G\C	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0
G166.5	952.5	949.4	946.9	944.9	943.0	940.2	937.8	936.1	935.3	935.2
G167.0	955.4	952.3	949.6	947.3	945.5	943.3	941.1	939.5	938.7	938.6
G167.5	957.7	954.6	952.0	949.8	948.0	946.4	944.3	942.9	942.1	941.8
G168.0	960.0	957.0	954.3	952.3	950.7	949.6	947.7	946.2	945.4	944.8
G168.5	961.8	959.0	956.6	954.7	953.4	952.7	951.0	949.5	948.5	947.8
G169.0	963.6	961.0	959.0	957.3	956.2	955.6	954.1	952.7	951.3	950.4
G169.5	965.8	963.5	961.5	960.0	959.0	958.2	957.2	955.4	954.0	952.9
G170.0	968.1	965.9	964.1	962.6	961.5	960.8	959.8	957.9	956.4	955.4
G170.5	970.7	968.5	966.7	965.3	964.1	962.9	961.8	960.3	958.8	957.9
G171.0	973.2	971.1	969.2	967.6	966.2	965.0	963.8	962.6	961.3	960.5
G171.5	975.4	973.2	971.4	969.8	968.4	966.9	965.7	964.7	963.8	963.1
G172.0	977.6	975.4	973.4	971.7	970.1	968.7	967.6	966.9	966.4	965.6
G172.5	978.8	976.8	975.0	973.4	971.8	970.6	969.7	969.1	968.7	968.0
G173.0	980.1	978.3	976.6	975.0	973.6	972.5	971.7	971.2	970.7	970.3
G173.5	981.2	979.5	978.0	976.6	975.4	974.5	973.7	973.2	972.7	972.0
G174.0	982.3	980.8	979.5	978.3	977.3	976.5	975.8	975.1	974.3	973.6
G174.5	984.0	982.6	981.3	980.2	979.2	978.5	977.6	976.8	976.1	975.4
G175.0	985.6	984.4	983.1	982.0	981.0	980.1	979.3	978.6	977.7	976.9
G175.5	987.1	985.9	984.7	983.7	982.7	981.9	981.0	980.1	979.2	978.5
G176.0	988.5	987.3	986.2	985.1	984.2	983.2	982.3	981.5	980.8	980.1
G176.5	989.1	988.1	987.1	986.2	985.3	984.4	983.6	982.8	982.2	981.5
G177.0	989.8	988.9	988.0	987.1	986.3	985.5	984.8	984.2	983.5	983.0
G177.5	990.0	989.3	988.5	987.8	987.1	986.5	986.0	985.4	984.9	984.5
G178.0	990.3	989.7	989.1	988.6	988.0	987.6	987.1	986.7	986.3	986.0
G178.5	990.7	990.3	989.8	989.4	989.0	988.7	988.3	988.0	987.7	987.4
G179.0	991.2	990.8	990.5	990.3	990.0	989.7	989.5	989.3	989.0	988.9
G179.5	991.4	991.3	991.2	991.0	990.9	990.7	990.6	990.5	990.4	990.3
G180.0	991.7	991.7	991.7	991.7	991.7	991.7	991.7	991.7	991.7	991.7

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 10)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G0.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0
G0.5	3996.0	3995.3	3994.6	3993.8	3993.5	3993.1	3992.8	3992.4	3992.4	3992.0
G1.0	3987.0	3985.6	3984.1	3983.0	3982.0	3981.2	3980.5	3979.8	3979.4	3979.1
G1.5	3978.7	3976.6	3974.4	3972.6	3970.8	3969.7	3968.3	3967.6	3966.8	3966.1
G2.0	3968.3	3966.5	3964.7	3962.2	3960.0	3958.2	3956.4	3955.3	3954.2	3953.2
G2.5	3958.2	3955.7	3953.5	3951.7	3949.2	3946.7	3944.5	3943.1	3941.6	3940.2
G3.0	3948.5	3945.6	3942.7	3940.6	3938.8	3935.5	3933.0	3930.8	3929.0	3927.2
G3.5	3938.4	3935.5	3932.3	3929.8	3927.2	3924.7	3921.5	3918.6	3916.4	3914.3
G4.0	3928.3	3925.1	3922.6	3919.0	3916.1	3913.6	3910.0	3906.4	3903.8	3901.3
G4.5	3917.9	3914.6	3911.8	3908.9	3905.3	3902.4	3898.4	3894.5	3891.2	3888.7
G5.0	3908.2	3903.8	3901.0	3898.4	3894.8	3891.2	3887.3	3882.2	3878.3	3875.8
G5.5	3897.7	3893.4	3890.2	3887.3	3884.4	3880.1	3876.5	3871.4	3867.5	3864.6
G6.0	3887.6	3883.0	3878.6	3875.4	3873.2	3868.9	3865.7	3860.6	3856.3	3853.1
G6.5	3877.6	3871.4	3866.8	3863.2	3861.0	3857.8	3854.2	3849.5	3845.2	3841.9
G7.0	3867.1	3859.9	3855.2	3851.3	3848.8	3846.2	3843.0	3838.7	3834.4	3830.8
G7.5	3856.3	3848.8	3843.4	3839.0	3836.5	3834.7	3831.5	3827.5	3823.2	3819.2
G8.0	3844.8	3837.6	3831.5	3827.2	3824.3	3822.8	3820.0	3816.4	3812.0	3808.1
G8.5	3832.6	3826.1	3819.6	3815.3	3812.0	3810.2	3808.1	3805.2	3801.2	3796.9
G9.0	3820.0	3813.8	3807.7	3803.0	3799.8	3798.0	3796.6	3794.0	3790.1	3785.8
G9.5	3807.4	3800.9	3795.8	3791.2	3787.6	3785.8	3784.7	3782.9	3778.9	3774.2
G10.0	3794.0	3788.3	3783.6	3778.9	3775.3	3773.2	3772.8	3771.7	3768.1	3763.1
G10.5	3780.4	3775.3	3770.3	3766.3	3763.1	3761.3	3760.9	3759.8	3755.5	3750.8
G11.0	3766.7	3761.3	3757.3	3753.7	3751.9	3749.8	3749.4	3747.6	3743.3	3738.2
G11.5	3752.3	3747.6	3744.0	3742.2	3740.4	3738.6	3737.9	3735.7	3731.0	3725.6
G12.0	3737.9	3733.9	3732.1	3730.7	3729.2	3727.4	3726.4	3723.5	3718.8	3713.0
G12.5	3723.1	3721.0	3720.2	3719.2	3717.7	3716.3	3714.8	3711.6	3706.2	3700.4
G13.0	3708.7	3708.4	3708.4	3707.3	3706.2	3704.8	3703.3	3699.4	3694.0	3687.8
G13.5	3696.1	3696.1	3696.5	3695.8	3694.7	3693.6	3691.8	3687.5	3681.7	3675.2
G14.0	3683.5	3683.9	3685.0	3684.6	3683.5	3682.4	3680.6	3675.6	3669.1	3662.6
G14.5	3669.8	3671.3	3673.1	3673.1	3672.0	3670.9	3669.5	3663.7	3656.9	3650.0
G15.0	3656.5	3658.7	3660.8	3661.6	3660.8	3659.8	3658.3	3652.2	3644.6	3637.4
G15.5	3643.6	3646.1	3649.0	3650.0	3649.3	3648.2	3646.8	3640.7	3633.1	3625.9
G16.0	3629.9	3633.5	3637.1	3638.9	3637.8	3635.6	3634.9	3629.5	3622.0	3614.8
G16.5	3616.2	3620.5	3624.8	3627.4	3624.8	3623.4	3623.0	3618.4	3610.4	3603.6
G17.0	3602.9	3608.3	3612.2	3613.7	3612.2	3610.8	3611.2	3607.2	3599.2	3592.3
G17.5	3589.2	3596.0	3598.1	3599.6	3599.5	3598.2	3599.2	3595.8	3587.8	3581.1
G18.0	3574.7	3583.4	3583.0	3585.2	3586.6	3585.7	3586.9	3584.5	3576.5	3569.9

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 11)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G18.5	3560.3	3568.2	3568.1	3570.7	3573.3	3573.0	3574.5	3573.2	3565.1	3558.7
G19.0	3545.7	3552.0	3553.3	3556.0	3560.0	3560.4	3562.1	3561.9	3553.7	3547.5
G19.5	3529.1	3535.2	3538.4	3541.1	3546.5	3547.8	3549.7	3550.5	3542.4	3536.4
G20.0	3510.3	3516.9	3523.5	3526.2	3532.9	3535.1	3537.2	3539.2	3531.0	3525.2
G20.5	3491.6	3498.4	3508.0	3511.4	3519.2	3522.3	3521.7	3520.4	3510.9	3505.9
G21.0	3473.3	3479.7	3491.3	3496.7	3505.2	3504.9	3502.3	3500.4	3490.8	3485.2
G21.5	3454.9	3461.2	3474.3	3482.1	3487.0	3485.6	3482.9	3480.5	3470.8	3464.4
G22.0	3436.5	3443.0	3457.0	3466.2	3467.1	3466.2	3463.5	3460.5	3450.7	3443.7
G22.5	3417.3	3424.9	3439.3	3446.5	3447.3	3446.9	3444.1	3440.6	3430.5	3422.9
G23.0	3397.7	3407.0	3419.6	3426.8	3427.6	3427.6	3424.8	3420.8	3410.5	3402.1
G23.5	3377.9	3388.8	3398.4	3407.3	3408.2	3408.2	3405.5	3400.9	3390.4	3381.2
G24.0	3357.6	3370.3	3377.4	3387.8	3388.8	3388.9	3386.1	3381.0	3370.3	3360.3
G24.5	3337.0	3349.5	3356.6	3367.9	3369.3	3369.5	3366.7	3361.1	3350.2	3339.3
G25.0	3316.2	3328.7	3336.1	3347.8	3349.8	3350.2	3347.3	3341.2	3330.1	3318.3
G25.5	3295.2	3307.2	3315.6	3328.1	3330.1	3331.1	3324.9	3314.8	3302.5	3292.1
G26.0	3273.0	3286.0	3294.9	3308.8	3310.3	3307.7	3296.2	3287.2	3275.0	3264.8
G26.5	3251.0	3265.1	3274.1	3289.9	3288.3	3279.1	3267.5	3259.4	3247.4	3237.5
G27.0	3229.0	3244.2	3253.5	3270.7	3258.2	3250.3	3238.8	3231.6	3219.8	3210.2
G27.5	3206.8	3222.8	3233.4	3244.2	3228.4	3221.5	3210.2	3203.7	3192.2	3183.0
G28.0	3184.8	3201.6	3213.4	3212.2	3198.9	3192.5	3181.5	3175.8	3164.7	3155.8
G28.5	3163.0	3180.5	3189.1	3180.2	3169.3	3162.9	3152.8	3147.8	3137.1	3128.6
G29.0	3141.0	3159.4	3158.2	3148.2	3139.8	3133.2	3124.2	3119.8	3109.5	3101.4
G29.5	3118.9	3138.1	3126.9	3116.1	3110.2	3103.3	3095.5	3091.8	3081.9	3074.3
G30.0	3097.1	3108.6	3095.4	3084.2	3080.7	3073.4	3066.9	3063.6	3054.3	3047.2
G30.5	3075.5	3075.7	3063.7	3052.4	3051.1	3043.4	3038.6	3035.6	3026.2	3018.6
G31.0	3053.2	3042.8	3032.0	3020.9	3020.5	3013.9	3011.1	3007.7	2998.2	2989.7
G31.5	3026.9	3009.9	2999.6	2989.6	2989.8	2986.5	2983.6	2979.7	2970.1	2960.9
G32.0	2992.5	2977.1	2966.9	2958.5	2961.4	2959.1	2956.1	2951.8	2942.0	2931.9
G32.5	2958.0	2944.3	2934.2	2927.6	2933.6	2931.8	2928.6	2924.0	2913.9	2903.0
G33.0	2923.6	2911.0	2901.5	2900.4	2906.1	2904.7	2901.1	2896.1	2885.8	2874.1
G33.5	2889.4	2877.6	2868.8	2873.2	2878.7	2877.5	2873.6	2868.3	2857.7	2845.2
G34.0	2855.5	2844.0	2839.3	2846.1	2851.6	2850.3	2846.1	2840.6	2829.6	2816.3
G34.5	2821.8	2810.4	2811.7	2819.1	2824.0	2823.0	2818.6	2812.9	2801.6	2787.4
G35.0	2788.3	2776.4	2784.3	2792.1	2796.7	2795.8	2791.0	2785.2	2773.5	2758.4
G35.5	2754.9	2746.1	2756.8	2764.8	2769.5	2768.4	2763.4	2757.2	2745.9	2730.9
G36.0	2720.8	2718.1	2729.5	2737.8	2742.5	2740.8	2735.0	2729.1	2718.3	2703.6
G36.5	2686.4	2690.2	2702.2	2711.1	2715.6	2711.2	2706.6	2701.0	2690.7	2676.4

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 12)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G37.0	2651.8	2662.7	2675.0	2684.5	2686.5	2681.6	2678.2	2672.9	2663.2	2649.2
G37.5	2623.5	2635.3	2647.9	2658.3	2655.9	2652.2	2649.8	2644.7	2635.6	2622.0
G38.0	2595.4	2608.0	2621.0	2629.2	2625.1	2622.8	2621.3	2616.4	2608.0	2594.8
G38.5	2567.4	2580.7	2594.1	2598.0	2594.4	2593.5	2592.8	2588.1	2580.4	2567.7
G39.0	2539.6	2553.6	2566.9	2566.8	2563.8	2564.1	2564.2	2559.8	2552.9	2540.5
G39.5	2512.1	2526.7	2535.4	2535.5	2533.4	2534.8	2535.5	2531.5	2525.3	2513.3
G40.0	2484.7	2499.9	2503.9	2504.3	2503.0	2505.4	2506.8	2503.2	2497.7	2486.2
G40.5	2457.4	2473.3	2472.4	2472.9	2472.8	2476.0	2478.2	2475.2	2469.6	2457.8
G41.0	2430.2	2441.7	2440.5	2441.6	2442.6	2446.8	2450.6	2447.2	2441.6	2429.1
G41.5	2403.1	2409.7	2408.5	2410.2	2412.7	2419.5	2423.0	2419.4	2413.4	2400.4
G42.0	2376.4	2377.6	2376.5	2378.9	2384.4	2392.3	2395.5	2391.5	2385.4	2371.7
G42.5	2349.1	2345.5	2344.5	2347.7	2357.5	2364.8	2368.0	2363.7	2357.3	2343.0
G43.0	2316.5	2313.3	2312.5	2318.3	2330.7	2337.4	2340.6	2335.9	2329.2	2314.2
G43.5	2283.2	2280.6	2280.7	2291.5	2303.9	2310.1	2313.3	2308.1	2301.1	2285.5
G44.0	2249.9	2248.0	2249.1	2264.7	2277.1	2282.9	2286.0	2280.3	2273.0	2256.7
G44.5	2216.7	2215.4	2221.6	2238.1	2250.4	2255.7	2258.8	2252.6	2244.9	2228.0
G45.0	2183.4	2183.0	2195.2	2211.5	2223.6	2228.5	2231.4	2224.9	2216.8	2199.2
G45.5	2149.8	2150.7	2168.8	2185.0	2196.8	2201.5	2203.7	2195.5	2187.3	2170.3
G46.0	2116.5	2122.2	2142.5	2158.5	2170.3	2174.4	2173.2	2165.7	2157.8	2141.3
G46.5	2083.4	2095.9	2116.3	2132.1	2143.8	2143.8	2142.7	2135.8	2128.3	2112.3
G47.0	2050.4	2069.8	2090.3	2105.6	2115.6	2113.1	2112.2	2105.9	2098.8	2083.3
G47.5	2017.9	2043.7	2064.3	2079.4	2084.8	2082.5	2081.7	2075.9	2069.4	2054.3
G48.0	1990.5	2017.6	2038.5	2051.4	2053.8	2051.6	2051.1	2046.0	2039.9	2025.4
G48.5	1964.6	1991.6	2012.8	2019.9	2022.8	2020.8	2020.5	2016.0	2010.3	1996.5
G49.0	1938.8	1965.9	1987.1	1988.4	1991.8	1989.9	1989.9	1986.0	1980.9	1967.6
G49.5	1913.3	1940.3	1956.6	1956.9	1960.4	1959.0	1959.2	1956.0	1951.4	1938.7
G50.0	1887.9	1914.8	1924.8	1925.4	1928.8	1928.0	1928.6	1926.0	1921.9	1909.8
G50.5	1862.7	1889.5	1893.0	1893.8	1897.2	1897.1	1898.1	1896.3	1891.9	1879.8
G51.0	1837.7	1859.8	1861.1	1862.0	1865.6	1866.2	1868.9	1866.9	1862.0	1849.6
G51.5	1812.8	1827.7	1829.2	1830.2	1833.9	1837.4	1839.8	1837.4	1832.0	1819.3
G52.0	1788.3	1795.5	1797.0	1798.5	1803.9	1808.7	1810.7	1807.9	1802.1	1789.1
G52.5	1764.0	1763.3	1765.0	1766.7	1775.5	1780.0	1781.7	1778.4	1772.2	1758.8
G53.0	1733.0	1731.0	1732.9	1736.8	1747.2	1751.4	1752.7	1749.0	1742.2	1728.5
G53.5	1701.0	1698.7	1700.9	1708.9	1718.9	1722.9	1723.8	1719.5	1712.3	1698.2
G54.0	1669.0	1666.6	1669.0	1681.2	1690.8	1694.3	1694.7	1690.1	1682.4	1667.8
G54.5	1637.0	1634.5	1641.7	1653.5	1662.6	1665.8	1665.8	1660.6	1652.4	1637.5
G55.0	1605.1	1602.6	1614.6	1625.9	1634.5	1637.2	1636.8	1631.2	1622.4	1607.1

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 13)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G55.5	1573.2	1571.0	1587.5	1598.4	1606.5	1608.8	1607.5	1601.4	1592.9	1577.8
G56.0	1541.4	1544.5	1560.5	1570.9	1578.5	1580.0	1577.3	1571.4	1563.3	1548.8
G56.5	1509.7	1518.2	1533.6	1543.5	1550.6	1549.7	1547.0	1541.5	1533.8	1519.7
G57.0	1478.3	1491.9	1506.7	1516.0	1520.8	1519.3	1516.7	1511.6	1504.2	1490.7
G57.5	1449.5	1465.7	1479.9	1488.7	1490.3	1489.0	1486.4	1481.7	1474.6	1461.6
G58.0	1423.9	1439.7	1453.3	1459.0	1459.8	1458.7	1456.2	1451.8	1445.1	1432.7
G58.5	1398.5	1413.9	1426.8	1428.9	1429.4	1428.5	1426.0	1421.9	1415.5	1403.7
G59.0	1373.1	1388.1	1398.7	1398.9	1399.0	1398.3	1395.8	1392.0	1385.9	1374.7
G59.5	1347.9	1362.5	1368.8	1368.9	1368.8	1368.1	1365.7	1362.1	1356.4	1345.8
G60.0	1322.9	1337.0	1339.0	1339.0	1338.5	1337.9	1335.5	1332.2	1326.8	1316.8
G60.5	1297.9	1308.8	1309.2	1309.1	1308.3	1307.8	1305.6	1302.6	1296.9	1287.0
G61.0	1273.1	1279.2	1279.5	1279.4	1278.2	1278.1	1276.5	1273.0	1267.1	1256.9
G61.5	1248.5	1249.7	1249.8	1249.6	1248.1	1249.5	1247.3	1243.4	1237.2	1226.9
G62.0	1222.1	1220.3	1220.1	1219.9	1220.0	1220.9	1218.1	1213.8	1207.3	1196.9
G62.5	1193.0	1191.0	1190.4	1190.8	1192.0	1192.2	1188.9	1184.3	1177.5	1166.9
G63.0	1164.0	1161.6	1160.7	1163.3	1164.0	1163.7	1159.7	1154.7	1147.6	1136.8
G63.5	1134.9	1132.4	1131.5	1135.9	1136.0	1135.0	1130.6	1125.1	1117.7	1106.8
G64.0	1105.8	1103.2	1105.1	1108.6	1108.1	1106.5	1101.4	1095.6	1087.8	1076.8
G64.5	1076.8	1074.0	1078.7	1081.4	1080.3	1077.9	1072.3	1066.0	1058.0	1046.7
G65.0	1047.9	1047.2	1052.6	1054.4	1052.4	1049.3	1043.1	1036.4	1028.1	1016.7
G65.5	1019.1	1021.9	1026.5	1027.4	1024.6	1020.8	1015.5	1011.0	1003.8	991.8
G66.0	990.3	996.6	1000.4	1000.5	996.8	994.1	990.8	986.4	979.3	967.9
G66.5	964.8	971.5	974.5	973.8	970.0	969.4	966.2	961.8	955.0	944.0
G67.0	940.6	946.4	948.6	947.1	945.4	944.7	941.5	937.3	930.6	920.1
G67.5	916.6	921.5	922.8	922.3	920.7	920.0	916.9	912.7	906.2	896.3
G68.0	892.6	896.7	897.1	897.7	896.0	895.3	892.3	888.1	881.9	872.4
G68.5	868.8	872.0	872.7	873.1	871.3	870.6	867.7	863.5	857.4	848.5
G69.0	845.0	847.4	848.4	848.5	846.6	846.0	843.0	838.9	833.1	824.7
G69.5	821.3	823.3	824.2	823.9	822.0	821.3	818.5	814.3	808.7	800.9
G70.0	797.8	799.4	800.0	799.4	797.3	796.6	793.8	789.7	784.3	777.0
G70.5	774.4	775.5	775.9	774.8	772.6	771.9	771.6	769.6	765.0	757.1
G71.0	751.0	751.8	751.9	750.3	747.9	751.4	752.4	750.3	745.7	737.7
G71.5	727.6	728.0	727.9	725.8	727.7	732.3	733.2	730.9	726.4	718.4
G72.0	704.2	704.2	703.9	704.3	708.9	713.2	714.0	711.5	707.1	699.1
G72.5	681.0	680.5	680.0	685.7	690.2	694.2	694.7	692.2	687.8	679.8
G73.0	657.8	656.8	661.6	667.0	671.4	675.1	675.5	672.8	668.5	660.4
G73.5	634.6	634.3	643.2	648.5	652.6	656.1	656.3	653.4	649.2	641.1

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 14)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G74.0	611.5	616.2	624.8	630.0	633.9	637.1	637.1	634.1	629.9	621.8
G74.5	589.2	598.1	606.5	611.5	615.1	618.0	617.9	614.7	610.6	602.5
G75.0	571.4	580.1	588.1	593.0	596.4	599.1	598.6	595.3	591.3	583.1
G75.5	553.6	562.1	569.8	574.6	577.7	580.1	579.3	575.9	572.1	564.3
G76.0	535.9	544.1	551.5	556.1	558.7	560.5	559.9	556.5	553.0	545.5
G76.5	518.3	526.2	533.2	537.3	539.1	540.9	540.4	537.1	533.8	526.8
G77.0	500.7	508.4	514.8	517.6	519.5	521.4	521.0	517.7	514.7	508.0
G77.5	483.2	490.5	495.3	498.0	499.9	501.8	501.6	498.3	495.5	489.3
G78.0	465.7	471.4	475.8	478.4	480.3	482.2	482.1	478.9	476.3	470.5
G78.5	447.9	452.0	456.3	458.8	460.7	462.6	462.7	459.5	457.2	451.8
G79.0	428.6	432.6	436.9	439.3	441.1	443.0	443.2	440.1	438.0	433.0
G79.5	409.3	413.2	417.4	419.8	421.6	423.4	423.8	420.7	418.8	414.3
G80.0	390.1	393.8	397.9	400.2	402.0	403.9	404.4	401.3	399.6	395.5
G80.5	370.9	374.5	378.5	380.8	382.4	384.4	385.0	381.9	380.4	376.5
G81.0	351.7	355.1	359.0	361.4	363.4	365.3	365.7	362.4	361.1	357.3
G81.5	332.6	335.8	339.9	342.7	344.5	346.1	346.4	343.0	341.9	338.2
G82.0	313.5	317.0	321.4	323.9	325.5	327.0	327.1	323.6	322.6	319.1
G82.5	294.8	298.9	302.9	305.2	306.6	307.8	307.8	304.2	303.4	300.0
G83.0	277.0	280.7	284.5	286.5	287.7	288.7	288.5	284.8	284.1	280.9
G83.5	259.2	262.6	266.0	267.7	268.8	269.5	269.2	265.3	264.8	261.7
G84.0	241.4	244.5	247.6	249.0	249.9	250.4	249.9	245.9	245.6	242.6
G84.5	223.6	226.4	229.1	230.3	231.0	231.3	230.5	226.5	226.3	223.5
G85.0	205.9	208.4	210.7	211.6	212.1	212.1	211.2	207.1	207.1	204.4
G85.5	188.2	190.3	192.3	192.8	193.1	192.9	191.9	187.7	187.9	185.5
G86.0	170.5	172.1	173.6	173.8	173.9	173.6	172.6	168.3	168.6	166.5
G86.5	152.4	153.6	154.7	154.8	154.7	154.3	153.2	149.0	149.4	147.6
G87.0	134.1	135.0	135.9	135.8	135.6	134.9	133.9	129.6	130.2	128.7
G87.5	115.8	116.4	117.0	116.8	116.4	115.6	114.5	110.3	111.0	109.8
G88.0	97.5	97.8	98.2	97.8	97.3	96.3	95.2	90.9	91.8	90.9
G88.5	79.2	79.3	79.3	78.8	78.1	77.0	75.8	71.5	72.6	71.9
G89.0	60.9	60.7	60.5	59.8	59.0	57.7	56.5	52.2	53.4	53.0
G89.5	42.7	42.2	41.7	40.8	39.8	38.4	37.2	32.8	34.2	34.1
G90.0	27.1	26.2	25.3	24.2	22.9	21.2	19.8	15.0	16.6	16.9
G90.5	49.8	48.5	47.2	45.4	43.4	40.6	38.3	30.1	32.7	33.0
G91.0	52.6	51.6	50.5	48.9	47.1	44.5	42.4	34.4	36.6	36.9
G91.5	55.5	54.7	53.8	52.4	50.9	48.4	46.4	38.7	40.5	40.7
G92.0	58.4	57.9	57.1	55.9	54.6	52.3	50.5	42.9	44.4	44.5

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 15)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G92.5	61.3	61.0	60.4	59.4	58.3	56.3	54.5	47.2	48.3	48.3
G93.0	64.2	64.1	63.7	62.9	62.1	60.2	58.6	51.4	52.2	52.2
G93.5	67.1	67.2	67.0	66.5	65.8	64.1	62.6	55.7	56.1	56.0
G94.0	69.9	70.3	70.3	70.0	69.5	68.0	66.7	60.0	60.0	59.8
G94.5	72.7	73.4	73.6	73.5	73.3	71.9	70.8	64.2	63.9	63.6
G95.0	75.5	76.5	76.8	77.0	77.0	75.9	74.8	68.5	67.8	67.4
G95.5	78.4	79.5	80.1	80.4	80.7	79.8	78.9	72.9	71.9	71.3
G96.0	81.2	82.6	83.3	83.9	84.4	83.7	83.0	77.4	76.0	75.1
G96.5	84.0	85.6	86.6	87.4	88.1	87.6	87.1	81.8	80.1	78.9
G97.0	86.8	88.7	89.8	90.9	91.8	91.6	91.2	86.2	84.2	82.7
G97.5	89.7	91.8	93.1	94.3	95.5	95.5	95.3	90.6	88.2	86.5
G98.0	92.7	94.8	96.4	97.8	99.2	99.4	99.4	95.0	92.3	90.3
G98.5	95.9	98.0	99.6	101.3	102.9	103.4	103.5	99.4	96.4	94.1
G99.0	99.0	101.4	103.0	104.8	106.6	107.3	107.6	103.8	100.5	97.9
G99.5	102.2	104.7	106.5	108.5	110.4	111.2	111.7	108.2	104.6	101.7
G100.0	105.3	108.0	110.0	112.2	114.3	115.3	115.8	112.6	108.6	105.6
G100.5	108.5	111.4	113.5	115.9	118.2	119.3	120.0	116.9	112.4	109.4
G101.0	111.7	114.8	117.0	119.7	122.1	123.3	124.1	121.2	116.1	113.2
G101.5	114.9	118.1	120.5	123.4	126.0	127.4	128.2	125.6	119.9	117.0
G102.0	117.8	121.5	124.0	127.1	129.9	131.4	132.4	129.9	123.6	120.9
G102.5	120.6	124.8	127.6	130.9	133.8	135.5	136.5	134.2	127.4	124.7
G103.0	123.4	127.8	131.1	134.6	137.7	139.5	140.7	138.5	131.1	128.5
G103.5	126.2	130.9	134.3	138.4	141.7	143.6	144.8	142.8	134.9	132.3
G104.0	129.1	133.9	137.6	141.9	145.6	147.7	149.0	147.1	138.6	136.2
G104.5	131.9	136.9	140.8	145.3	149.3	151.7	153.1	151.5	142.4	140.0
G105.0	134.8	140.0	144.0	148.8	153.0	155.6	157.2	155.8	146.1	143.8
G105.5	137.7	143.1	147.3	152.2	156.6	159.5	161.3	160.1	150.4	147.6
G106.0	142.4	146.2	150.5	155.7	160.3	163.3	165.3	164.5	154.6	151.4
G106.5	147.5	149.3	153.8	159.1	163.9	167.2	169.4	168.9	158.8	155.2
G107.0	152.6	154.2	157.1	162.6	167.6	171.1	173.4	173.2	163.1	159.0
G107.5	157.8	159.7	160.4	166.1	171.3	175.0	177.4	177.6	167.3	162.8
G108.0	163.0	165.1	166.1	169.6	175.0	178.9	181.5	182.0	171.5	166.6
G108.5	168.2	170.6	171.8	174.3	178.7	182.8	185.6	186.3	175.8	170.4
G109.0	173.5	176.1	177.6	180.3	183.0	186.7	189.6	190.7	180.0	174.3
G109.5	178.8	181.6	183.3	186.4	189.2	191.2	193.7	195.0	184.3	178.1
G110.0	184.5	187.2	189.1	192.4	195.4	197.5	199.0	199.7	188.5	182.2
G110.5	190.5	192.7	195.0	198.5	201.7	203.8	205.4	206.2	194.7	188.8

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 16)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G111.0	196.5	198.4	200.8	204.6	207.9	210.2	211.9	212.6	200.9	195.3
G111.5	202.5	205.0	206.7	210.7	214.1	216.5	218.3	219.1	207.0	201.8
G112.0	208.7	211.6	212.6	216.8	220.4	222.9	224.7	225.5	213.2	208.3
G112.5	214.8	218.2	219.7	222.9	226.6	229.2	231.1	232.0	219.4	214.8
G113.0	221.1	224.9	226.8	229.3	232.9	235.5	237.6	238.4	225.6	221.4
G113.5	227.4	231.6	233.9	236.8	239.1	241.9	244.0	244.8	231.8	227.9
G114.0	234.0	238.3	241.1	244.3	246.4	248.3	250.4	251.3	237.9	234.4
G114.5	241.6	245.1	248.3	251.8	254.2	255.5	256.9	257.7	244.1	240.9
G115.0	249.3	251.9	255.6	259.4	262.1	263.5	264.5	264.5	250.3	247.9
G115.5	257.0	259.2	262.8	267.0	269.9	271.6	272.8	273.1	259.6	257.1
G116.0	264.7	267.2	270.1	274.6	277.7	279.7	281.2	281.7	268.9	266.3
G116.5	272.4	275.3	277.4	282.2	285.6	287.8	289.5	290.3	278.2	275.5
G117.0	280.3	283.4	285.7	289.8	293.5	295.8	297.8	298.9	287.5	284.7
G117.5	288.2	291.5	294.1	297.5	301.3	303.9	306.1	307.5	296.8	294.0
G118.0	296.1	299.6	302.5	305.9	309.2	312.1	314.4	316.1	306.2	303.2
G118.5	303.3	307.8	311.0	314.5	317.2	320.2	322.7	324.7	315.5	312.4
G119.0	309.8	316.0	319.4	323.1	325.8	328.3	331.1	333.4	324.8	321.6
G119.5	316.5	324.3	328.0	331.8	334.4	336.8	339.4	342.0	334.1	330.9
G120.0	323.1	332.2	336.5	340.5	343.0	345.5	348.1	350.7	343.4	340.1
G120.5	329.9	339.2	345.1	349.2	351.7	354.2	356.8	359.4	352.3	349.3
G121.0	336.7	346.2	353.8	357.9	360.3	363.0	365.6	368.1	361.1	358.5
G121.5	343.6	353.3	361.8	366.6	369.0	371.7	374.3	376.8	370.0	367.7
G122.0	350.6	360.5	369.2	375.4	377.6	380.4	383.1	385.5	378.9	376.9
G122.5	357.6	367.7	376.6	383.9	386.3	389.1	391.9	394.2	387.8	386.1
G123.0	365.6	375.0	384.1	391.5	395.0	397.8	400.7	402.9	396.7	395.2
G123.5	374.6	382.3	391.6	399.2	403.5	406.6	409.4	411.6	405.5	404.5
G124.0	383.5	389.7	399.1	406.9	411.4	415.3	418.2	420.3	414.4	413.7
G124.5	392.5	397.1	406.7	414.7	419.3	423.5	427.0	429.0	423.3	422.9
G125.0	401.6	406.2	414.4	422.5	427.2	431.6	435.4	437.6	432.2	432.1
G125.5	410.7	415.4	422.1	430.3	435.1	439.7	443.7	446.2	441.3	441.3
G126.0	419.9	424.6	429.8	438.2	443.0	447.8	452.0	454.7	450.4	450.5
G126.5	429.1	433.8	439.0	446.1	451.0	455.9	460.2	463.3	459.5	459.8
G127.0	438.4	443.1	448.2	453.9	459.0	464.0	468.5	471.8	468.6	469.0
G127.5	447.4	452.3	457.4	462.4	467.0	472.2	476.8	480.4	477.7	478.2
G128.0	454.6	461.6	466.6	471.5	475.0	480.3	485.1	488.9	486.9	487.5
G128.5	461.9	470.9	475.9	480.5	483.5	488.5	493.5	497.5	496.0	496.7
G129.0	469.2	480.2	485.1	489.6	492.6	496.7	501.8	506.0	505.1	505.9

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 17)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G129.5	476.6	488.8	494.4	498.6	501.7	505.6	510.1	514.6	514.2	515.2
G130.0	483.9	495.9	503.8	507.7	510.8	514.6	519.0	523.3	523.3	524.4
G130.5	491.3	503.1	513.2	516.7	519.8	523.6	527.9	532.1	532.4	533.6
G131.0	498.7	510.2	522.1	525.7	528.9	532.6	536.9	541.0	541.5	542.8
G131.5	506.1	517.4	529.0	534.8	538.0	541.6	545.8	549.9	550.5	551.9
G132.0	513.6	524.6	535.9	543.8	547.0	550.7	554.8	558.8	559.6	561.1
G132.5	521.4	531.9	542.8	551.4	556.1	559.7	563.8	567.7	568.7	570.3
G133.0	530.8	539.1	549.8	558.1	565.2	568.8	572.8	576.6	577.7	579.5
G133.5	540.2	546.3	556.7	564.8	572.9	577.8	581.7	585.5	586.8	588.7
G134.0	549.5	553.5	563.7	571.6	579.6	586.9	590.7	594.4	595.9	597.9
G134.5	558.8	561.4	570.6	578.3	586.2	593.5	599.7	603.4	604.9	607.1
G135.0	568.1	570.3	577.5	585.1	592.9	600.1	606.5	611.8	614.0	615.7
G135.5	577.4	579.2	584.5	591.9	599.6	606.7	613.1	618.2	620.6	622.3
G136.0	586.6	588.0	591.8	598.6	606.3	613.3	619.6	624.7	627.1	629.0
G136.5	595.9	596.8	600.2	605.4	613.0	619.9	626.1	631.2	633.7	635.6
G137.0	605.1	605.6	608.6	612.2	619.7	626.5	632.6	637.7	640.3	642.3
G137.5	614.3	614.4	616.9	619.8	626.4	633.1	639.2	644.1	646.8	648.9
G138.0	621.9	623.1	625.2	627.9	633.1	639.7	645.7	650.6	653.4	655.5
G138.5	629.3	631.8	633.5	636.0	640.4	646.3	652.2	657.1	660.0	662.2
G139.0	636.7	640.5	641.8	644.1	648.2	653.0	658.8	663.5	666.5	668.8
G139.5	644.0	649.1	650.0	652.1	655.9	660.4	665.3	670.0	673.1	675.5
G140.0	651.4	656.2	658.2	660.2	663.6	667.9	672.5	676.5	679.6	682.1
G140.5	658.8	663.3	666.4	668.3	671.4	675.4	679.7	683.5	686.3	688.7
G141.0	666.1	670.4	674.6	676.3	679.1	682.9	686.9	690.4	693.0	695.3
G141.5	673.4	677.5	681.5	684.4	686.8	690.3	694.1	697.3	699.8	701.9
G142.0	680.8	684.6	688.4	692.4	694.5	697.7	701.3	704.2	706.5	708.5
G142.5	688.2	691.6	695.3	699.9	702.2	705.2	708.5	711.2	713.1	715.0
G143.0	695.5	698.7	702.2	706.7	709.9	712.6	715.6	718.1	719.8	721.7
G143.5	704.4	705.8	709.2	713.5	717.2	720.0	722.7	725.0	726.5	728.3
G144.0	713.2	712.9	716.2	720.2	723.9	727.4	729.9	731.9	733.2	734.8
G144.5	722.0	720.0	723.1	727.1	730.5	734.0	736.9	738.8	739.9	741.4
G145.0	730.8	727.6	730.1	733.9	737.3	740.6	743.5	745.6	746.6	748.1
G145.5	739.5	736.1	737.0	740.7	744.0	747.2	750.1	752.0	753.2	754.7
G146.0	748.3	744.6	744.0	747.5	750.8	753.8	756.6	758.5	759.7	761.3
G146.5	756.9	753.1	751.5	754.3	757.4	760.4	763.1	764.9	766.3	768.0
G147.0	765.6	761.5	759.8	761.2	764.1	767.1	769.6	771.4	772.9	774.6
G147.5	774.1	770.0	768.1	768.1	770.8	773.7	776.2	777.9	779.5	781.3

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 18)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G148.0	782.7	778.4	776.4	776.0	777.5	780.3	782.8	784.4	786.0	787.9
G148.5	791.3	786.7	784.6	783.9	784.4	786.9	789.4	790.9	792.6	794.6
G149.0	797.7	795.2	792.8	791.7	792.1	793.5	795.9	797.4	799.2	801.2
G149.5	803.1	803.6	800.9	799.6	799.7	800.6	802.6	803.8	805.8	807.8
G150.0	808.3	811.9	809.0	807.4	807.4	808.0	809.4	810.5	812.3	814.5
G150.5	813.5	819.2	817.1	815.3	814.9	815.3	816.4	817.3	819.1	821.1
G151.0	818.8	824.2	825.2	823.1	822.5	822.6	823.3	824.2	825.7	827.6
G151.5	824.0	829.3	833.2	830.9	830.1	829.9	830.2	831.1	832.4	834.2
G152.0	829.3	834.3	839.1	838.6	837.6	837.3	837.1	838.0	839.1	840.8
G152.5	834.5	839.3	843.8	846.3	845.1	844.5	844.0	844.9	845.8	847.4
G153.0	839.7	844.2	848.5	852.6	852.5	851.8	851.0	851.7	852.5	854.0
G153.5	844.9	849.2	853.2	857.0	859.9	859.0	857.8	858.6	859.1	860.6
G154.0	850.2	854.1	857.9	861.5	864.8	866.2	864.7	865.5	865.8	867.1
G154.5	855.5	859.1	862.6	866.0	869.2	871.7	871.6	872.3	872.5	873.7
G155.0	860.1	864.1	867.2	870.5	873.4	875.9	876.6	878.7	879.2	879.9
G155.5	864.5	868.9	871.9	875.0	877.7	880.1	880.8	882.9	883.3	884.2
G156.0	868.9	873.9	876.5	879.5	882.1	884.3	884.9	886.9	887.5	888.4
G156.5	873.2	877.9	881.2	883.9	886.4	888.5	889.2	891.0	891.6	892.6
G157.0	877.5	881.7	885.8	888.4	890.7	892.6	893.3	895.0	895.8	896.8
G157.5	881.7	885.4	889.8	893.0	895.0	896.8	897.5	899.1	900.0	901.0
G158.0	885.8	889.0	893.1	897.5	899.3	901.0	901.7	903.2	904.2	905.2
G158.5	889.7	892.6	896.4	900.8	903.5	905.2	905.8	907.3	908.3	909.4
G159.0	893.6	896.2	899.7	903.8	907.3	909.5	909.9	911.4	912.5	913.6
G159.5	897.3	899.7	903.1	906.7	909.9	913.2	914.1	915.5	916.6	917.7
G160.0	901.0	903.1	906.4	909.6	912.5	915.5	917.0	919.3	920.8	921.5
G160.5	904.5	906.6	909.6	912.4	915.1	917.7	919.1	921.3	922.6	923.3
G161.0	907.6	910.0	912.7	915.2	917.7	919.9	921.2	923.3	924.3	924.9
G161.5	910.3	913.4	915.9	917.9	920.2	922.1	923.3	925.2	926.1	926.7
G162.0	913.0	916.6	918.8	920.5	922.8	924.2	925.4	927.1	927.9	928.4
G162.5	915.6	919.1	921.7	923.2	925.2	926.4	927.6	929.1	929.7	930.0
G163.0	918.2	921.5	924.2	925.8	927.6	928.5	929.6	931.0	931.5	931.8
G163.5	920.8	924.0	926.4	928.5	929.9	930.7	931.7	932.9	933.3	933.5
G164.0	923.5	926.4	928.5	930.5	932.2	932.8	933.9	934.8	935.0	935.2
G164.5	926.1	928.7	930.7	932.5	934.1	934.9	935.9	936.7	936.8	937.0
G165.0	928.7	931.0	932.7	934.5	936.0	936.8	937.9	938.6	938.6	938.8
G165.5	931.3	933.4	934.9	936.5	937.9	938.6	939.6	940.3	940.4	940.5
G166.0	933.9	935.7	937.0	938.4	939.7	940.4	941.4	942.0	942.2	942.3

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 19)

Unit: cd

G\C	C50.0	C55.0	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0
G166.5	936.4	937.9	939.0	940.4	941.5	942.2	943.1	943.7	943.9	944.0
G167.0	938.9	940.0	941.1	942.3	943.4	944.1	944.9	945.5	945.7	945.8
G167.5	941.9	942.2	943.1	944.4	945.3	945.9	946.6	947.2	947.4	947.6
G168.0	944.5	944.4	945.1	946.4	947.2	947.7	948.3	948.9	949.2	949.4
G168.5	947.1	946.9	947.2	948.4	949.1	949.5	950.0	950.7	950.9	951.1
G169.0	949.7	949.5	949.8	950.3	950.9	951.3	951.8	952.4	952.7	952.8
G169.5	952.3	952.1	952.4	952.7	952.8	953.0	953.5	954.2	954.5	954.5
G170.0	954.8	954.7	954.9	955.0	954.9	955.0	955.3	955.9	956.3	956.3
G170.5	957.5	957.2	957.2	957.2	957.0	957.0	957.3	957.7	958.0	958.0
G171.0	960.0	959.8	959.5	959.3	959.0	959.0	959.3	959.6	959.7	959.7
G171.5	962.6	962.2	961.7	961.3	961.0	961.0	961.2	961.4	961.5	961.5
G172.0	965.1	964.4	963.8	963.3	963.0	963.0	963.1	963.2	963.2	963.2
G172.5	967.3	966.4	965.8	965.3	965.0	964.9	965.0	965.0	964.9	964.9
G173.0	969.3	968.5	967.8	967.2	966.9	966.9	966.9	966.8	966.7	966.7
G173.5	971.3	970.4	969.7	969.2	968.9	968.8	968.7	968.6	968.5	968.4
G174.0	973.0	972.3	971.6	971.2	970.9	970.7	970.6	970.3	970.2	970.1
G174.5	974.5	973.9	973.4	973.1	972.8	972.6	972.5	972.1	971.9	971.8
G175.0	976.2	975.6	975.2	974.9	974.6	974.4	974.2	973.9	973.6	973.6
G175.5	977.9	977.3	976.9	976.6	976.3	976.1	975.9	975.7	975.4	975.4
G176.0	979.5	979.0	978.6	978.3	978.0	977.9	977.6	977.4	977.3	977.2
G176.5	981.0	980.6	980.2	979.9	979.7	979.5	979.3	979.1	979.1	979.0
G177.0	982.6	982.2	981.9	981.6	981.5	981.2	981.0	980.9	980.9	980.8
G177.5	984.1	983.7	983.5	983.3	983.1	982.9	982.8	982.7	982.7	982.6
G178.0	985.7	985.4	985.2	984.9	984.8	984.6	984.5	984.5	984.5	984.4
G178.5	987.2	987.0	986.8	986.6	986.4	986.4	986.3	986.3	986.3	986.2
G179.0	988.7	988.5	988.4	988.2	988.2	988.1	988.1	988.1	988.1	988.1
G179.5	990.2	990.1	990.0	990.0	989.9	989.9	989.9	989.9	989.9	989.9
G180.0	991.7	991.7	991.7	991.7	991.7	991.7	991.7	991.7	991.7	991.7

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 20)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G0.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0
G0.5	3991.7	3991.3	3991.3	3991.3	3991.7	3991.7	3992.0	3992.8	3993.1	3993.8
G1.0	3978.4	3978.0	3978.0	3978.0	3978.4	3979.1	3979.4	3980.5	3981.6	3982.7
G1.5	3965.4	3964.7	3964.7	3964.7	3965.4	3966.1	3967.2	3968.6	3970.4	3972.2
G2.0	3952.1	3951.7	3951.4	3951.7	3952.4	3953.5	3955.3	3957.1	3959.6	3962.2
G2.5	3939.1	3938.4	3938.4	3938.8	3939.8	3941.3	3943.4	3946.0	3948.8	3952.1
G3.0	3925.8	3925.1	3925.1	3925.8	3927.2	3929.4	3931.6	3934.4	3937.7	3941.6
G3.5	3912.8	3912.1	3912.5	3913.2	3915.0	3917.2	3919.7	3922.6	3926.5	3931.2
G4.0	3899.9	3899.2	3899.5	3900.6	3902.4	3904.2	3907.1	3910.7	3914.6	3919.3
G4.5	3886.9	3886.2	3886.9	3888.0	3889.1	3891.2	3894.1	3897.4	3901.7	3906.7
G5.0	3874.0	3873.6	3874.0	3875.0	3875.8	3877.9	3880.4	3883.7	3888.4	3893.8
G5.5	3862.4	3861.7	3861.7	3861.4	3862.1	3863.9	3866.0	3869.6	3874.7	3880.4
G6.0	3850.9	3850.2	3850.2	3849.1	3849.1	3849.1	3851.6	3855.6	3860.6	3867.1
G6.5	3839.8	3838.7	3838.0	3837.2	3836.5	3836.2	3837.2	3841.6	3847.0	3852.7
G7.0	3828.2	3827.2	3826.1	3825.4	3823.9	3823.9	3825.0	3827.2	3831.8	3838.3
G7.5	3817.1	3815.6	3814.2	3813.1	3811.7	3811.7	3812.4	3813.8	3816.4	3822.5
G8.0	3805.6	3804.1	3802.3	3800.9	3799.4	3799.1	3799.8	3800.5	3801.2	3804.8
G8.5	3794.0	3792.6	3790.8	3788.6	3787.2	3786.8	3786.8	3787.2	3785.8	3786.5
G9.0	3782.9	3780.7	3779.3	3776.4	3775.0	3774.2	3773.5	3772.1	3770.6	3769.9
G9.5	3771.4	3769.2	3767.4	3764.5	3762.7	3761.3	3760.6	3757.3	3755.2	3754.4
G10.0	3759.8	3758.0	3755.5	3752.6	3750.5	3748.7	3746.2	3742.9	3739.7	3739.0
G10.5	3747.6	3746.2	3743.6	3740.4	3738.2	3736.4	3732.1	3727.4	3724.6	3724.2
G11.0	3734.6	3732.8	3730.0	3728.5	3725.6	3722.8	3718.1	3712.7	3709.4	3709.1
G11.5	3722.0	3719.2	3715.9	3713.8	3713.8	3709.4	3703.3	3697.6	3694.7	3693.2
G12.0	3709.1	3705.5	3701.9	3699.4	3698.6	3696.1	3688.9	3682.8	3679.6	3677.4
G12.5	3695.8	3691.4	3687.5	3684.2	3682.1	3679.9	3674.2	3668.0	3664.1	3661.2
G13.0	3682.8	3677.8	3673.1	3669.1	3665.5	3661.9	3659.4	3653.3	3649.0	3644.3
G13.5	3669.5	3663.7	3658.7	3653.6	3648.6	3643.9	3641.0	3638.5	3632.8	3627.4
G14.0	3656.2	3649.7	3644.3	3638.2	3631.7	3625.9	3623.0	3623.8	3616.2	3610.4
G14.5	3642.8	3636.0	3629.5	3622.0	3614.0	3607.9	3604.7	3604.7	3600.0	3593.6
G15.0	3629.5	3622.0	3614.8	3605.4	3596.5	3589.8	3585.9	3584.7	3583.5	3576.9
G15.5	3617.3	3607.9	3599.4	3588.5	3578.9	3571.8	3566.9	3564.6	3565.7	3560.4
G16.0	3605.8	3596.1	3584.4	3571.5	3561.3	3553.5	3547.3	3544.5	3545.5	3543.9
G16.5	3594.4	3584.3	3571.8	3554.6	3543.6	3534.5	3527.4	3524.3	3525.4	3526.2
G17.0	3583.0	3572.5	3559.5	3541.5	3525.9	3515.3	3507.5	3504.3	3505.1	3508.9
G17.5	3571.7	3560.8	3547.3	3528.4	3510.6	3496.0	3487.6	3483.9	3483.2	3486.1
G18.0	3560.4	3549.2	3535.0	3515.3	3497.0	3476.3	3468.0	3463.2	3460.7	3461.5

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 21)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G18.5	3549.0	3537.7	3522.5	3502.3	3483.0	3460.3	3448.5	3442.4	3437.5	3436.8
G19.0	3537.6	3526.2	3509.9	3489.4	3468.8	3445.3	3428.7	3419.4	3412.9	3412.1
G19.5	3526.3	3514.8	3497.5	3476.5	3454.7	3430.4	3409.8	3396.0	3388.4	3387.6
G20.0	3514.9	3503.2	3485.2	3463.6	3440.9	3415.9	3393.6	3372.2	3364.1	3363.4
G20.5	3499.2	3491.6	3472.9	3450.9	3427.0	3401.4	3377.7	3347.9	3340.3	3339.4
G21.0	3477.7	3472.6	3460.7	3438.2	3412.7	3386.8	3360.1	3326.4	3316.7	3314.8
G21.5	3456.3	3450.2	3441.0	3425.7	3398.5	3372.1	3342.9	3307.9	3292.4	3289.1
G22.0	3434.9	3427.8	3417.3	3410.2	3384.3	3357.5	3325.9	3290.4	3267.8	3263.2
G22.5	3413.5	3405.2	3393.8	3385.5	3370.1	3343.2	3308.5	3272.9	3242.8	3237.0
G23.0	3392.2	3382.5	3370.2	3360.8	3351.5	3329.2	3291.0	3255.2	3221.0	3211.0
G23.5	3370.8	3359.7	3346.8	3335.9	3326.1	3314.1	3273.5	3237.0	3200.7	3184.9
G24.0	3349.4	3336.7	3323.3	3310.8	3300.8	3297.8	3256.3	3219.2	3180.7	3158.6
G24.5	3327.9	3313.5	3299.6	3285.5	3275.7	3270.2	3239.2	3201.5	3161.0	3132.3
G25.0	3306.3	3290.3	3275.8	3260.2	3250.4	3242.3	3222.1	3182.7	3141.2	3105.4
G25.5	3282.8	3267.1	3251.9	3234.9	3224.8	3213.1	3203.2	3164.1	3121.5	3083.4
G26.0	3255.5	3242.1	3227.9	3209.7	3198.9	3184.1	3175.3	3145.6	3102.1	3062.0
G26.5	3228.2	3214.9	3203.2	3184.6	3172.8	3155.3	3147.2	3126.6	3082.8	3039.8
G27.0	3201.0	3187.7	3175.8	3159.8	3145.7	3126.9	3118.9	3107.7	3063.1	3017.8
G27.5	3173.8	3160.5	3148.3	3133.7	3117.8	3098.9	3089.2	3082.8	3043.5	2995.5
G28.0	3146.7	3133.4	3120.7	3106.6	3089.7	3071.1	3059.4	3053.4	3024.0	2973.1
G28.5	3119.7	3106.4	3093.2	3079.4	3061.3	3043.6	3029.5	3024.0	3003.7	2950.8
G29.0	3092.7	3079.4	3065.8	3052.3	3032.7	3015.6	2999.7	2994.4	2983.6	2928.8
G29.5	3065.7	3052.4	3038.6	3025.2	3004.5	2987.0	2970.4	2964.2	2963.4	2906.9
G30.0	3038.8	3025.5	3011.5	2997.6	2976.4	2958.2	2941.2	2933.9	2931.5	2885.0
G30.5	3011.1	2998.7	2984.7	2970.2	2948.4	2929.6	2912.3	2903.4	2899.3	2863.2
G31.0	2981.5	2971.0	2957.6	2943.1	2920.5	2900.9	2883.2	2872.0	2867.0	2841.7
G31.5	2951.9	2940.9	2930.5	2916.3	2892.9	2872.3	2854.2	2840.7	2834.7	2819.4
G32.0	2922.2	2910.8	2899.5	2889.8	2865.5	2843.9	2825.8	2809.3	2802.7	2797.3
G32.5	2892.4	2880.7	2868.1	2862.8	2838.1	2815.7	2796.9	2777.7	2770.5	2772.8
G33.0	2862.6	2850.4	2836.8	2830.2	2810.8	2787.8	2768.1	2746.3	2738.2	2738.8
G33.5	2832.9	2820.0	2805.6	2797.6	2783.5	2760.1	2739.6	2715.3	2705.8	2705.1
G34.0	2803.1	2789.6	2774.5	2765.0	2753.0	2732.4	2711.3	2686.1	2672.7	2672.5
G34.5	2773.2	2759.0	2743.6	2732.4	2720.3	2704.6	2682.6	2657.1	2639.6	2640.3
G35.0	2743.3	2728.4	2712.7	2699.8	2687.5	2677.4	2654.3	2628.2	2606.7	2608.2
G35.5	2713.9	2697.8	2681.7	2667.0	2654.7	2646.5	2626.2	2599.1	2574.8	2575.4
G36.0	2686.8	2667.5	2650.9	2634.3	2621.6	2613.3	2598.2	2570.1	2543.4	2542.6
G36.5	2659.8	2640.6	2620.0	2601.8	2588.1	2580.3	2570.3	2541.5	2514.5	2509.2

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 22)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G37.0	2632.8	2613.8	2591.7	2569.4	2554.8	2546.7	2542.6	2512.8	2485.7	2475.2
G37.5	2605.9	2587.0	2564.9	2537.1	2521.5	2513.2	2508.1	2484.1	2457.2	2441.3
G38.0	2578.9	2560.1	2537.8	2508.3	2488.4	2479.5	2473.6	2455.8	2428.4	2407.5
G38.5	2552.0	2533.2	2510.8	2481.5	2455.5	2445.9	2439.2	2427.7	2399.4	2373.8
G39.0	2525.1	2506.5	2483.9	2454.8	2423.4	2412.1	2404.8	2399.6	2370.8	2340.4
G39.5	2498.2	2479.8	2457.2	2428.2	2396.8	2378.3	2370.5	2367.6	2342.2	2310.0
G40.0	2471.3	2453.1	2430.7	2401.8	2370.3	2344.5	2335.9	2332.6	2313.5	2280.7
G40.5	2444.1	2426.5	2404.3	2375.5	2343.8	2310.9	2301.4	2298.4	2285.1	2251.5
G41.0	2414.9	2399.8	2378.0	2349.1	2317.3	2283.7	2267.0	2264.3	2257.0	2222.3
G41.5	2385.7	2369.6	2351.6	2322.7	2290.9	2256.9	2232.5	2230.3	2229.0	2193.4
G42.0	2356.5	2339.4	2323.0	2296.5	2264.7	2230.4	2198.1	2196.0	2200.2	2164.7
G42.5	2327.4	2309.2	2292.2	2270.4	2238.7	2204.0	2164.8	2161.7	2165.0	2136.1
G43.0	2298.2	2279.2	2261.4	2242.4	2212.9	2177.8	2137.9	2127.3	2129.9	2107.8
G43.5	2269.2	2249.2	2230.8	2211.3	2187.0	2151.6	2111.7	2092.8	2095.1	2079.9
G44.0	2240.1	2219.3	2200.2	2180.1	2161.1	2125.7	2085.6	2058.3	2060.3	2052.1
G44.5	2211.2	2189.6	2169.7	2148.8	2130.7	2100.0	2059.6	2024.0	2025.5	2024.6
G45.0	2182.0	2159.9	2139.3	2117.7	2099.3	2074.6	2033.8	1994.1	1990.7	1997.7
G45.5	2152.9	2130.2	2108.9	2086.8	2068.0	2049.1	2008.2	1967.9	1956.1	1966.1
G46.0	2124.1	2100.7	2078.6	2056.0	2036.6	2019.5	1982.7	1941.9	1921.5	1931.9
G46.5	2095.4	2072.5	2048.3	2025.3	2005.3	1987.6	1957.5	1916.2	1887.2	1898.1
G47.0	2066.7	2044.3	2019.1	1994.7	1974.1	1955.8	1932.5	1890.6	1853.1	1864.4
G47.5	2038.0	2016.1	1991.2	1964.1	1943.1	1924.1	1907.5	1865.3	1820.4	1830.6
G48.0	2009.3	1987.7	1963.3	1934.7	1912.2	1892.4	1877.3	1840.3	1795.0	1796.7
G48.5	1980.8	1959.4	1935.5	1907.2	1881.4	1860.9	1845.8	1815.6	1769.7	1763.0
G49.0	1952.2	1931.3	1907.8	1879.8	1850.8	1829.6	1814.3	1790.9	1744.8	1729.3
G49.5	1923.7	1903.2	1880.0	1852.5	1822.9	1798.4	1782.8	1766.3	1720.2	1695.9
G50.0	1895.3	1875.2	1852.3	1825.3	1796.0	1767.4	1751.5	1740.3	1695.9	1662.7
G50.5	1866.6	1847.3	1824.7	1798.1	1769.1	1736.7	1720.5	1708.7	1671.6	1629.8
G51.0	1836.3	1819.3	1797.3	1771.0	1742.4	1708.7	1689.7	1677.1	1647.6	1602.3
G51.5	1805.9	1788.7	1769.9	1744.0	1715.7	1682.2	1659.2	1645.6	1624.0	1577.9
G52.0	1775.5	1758.0	1740.9	1717.1	1688.9	1655.9	1628.9	1614.4	1600.5	1553.5
G52.5	1745.1	1727.2	1710.0	1690.4	1662.4	1629.7	1598.8	1583.6	1577.1	1529.4
G53.0	1714.6	1696.5	1679.1	1661.6	1636.2	1603.5	1572.5	1553.2	1547.2	1505.4
G53.5	1684.2	1665.8	1648.2	1630.8	1610.1	1577.5	1546.6	1523.2	1516.9	1481.9
G54.0	1653.6	1634.9	1617.2	1599.9	1584.2	1551.7	1520.6	1493.4	1486.9	1458.7
G54.5	1623.0	1604.0	1586.2	1568.9	1553.3	1526.1	1495.0	1463.8	1457.0	1435.7
G55.0	1592.4	1573.1	1555.2	1537.9	1522.1	1500.7	1469.6	1436.4	1427.3	1413.1

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 23)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G55.5	1562.0	1542.2	1524.2	1507.0	1490.9	1475.2	1444.5	1411.3	1397.6	1391.1
G56.0	1533.3	1511.7	1493.3	1476.2	1459.9	1444.4	1419.2	1386.3	1367.9	1363.9
G56.5	1504.7	1483.7	1462.4	1445.4	1428.9	1413.6	1394.1	1361.4	1338.2	1334.7
G57.0	1476.1	1455.7	1433.9	1414.6	1398.0	1383.0	1369.3	1336.7	1308.6	1305.6
G57.5	1447.6	1427.8	1406.5	1383.9	1367.2	1352.4	1341.9	1312.2	1281.3	1276.6
G58.0	1419.1	1399.9	1379.3	1356.5	1336.5	1321.9	1311.1	1287.9	1256.8	1247.7
G58.5	1390.7	1372.0	1352.1	1330.0	1306.0	1291.6	1280.4	1263.7	1232.4	1218.7
G59.0	1362.3	1344.3	1324.9	1303.6	1277.7	1261.4	1249.8	1239.8	1208.3	1189.9
G59.5	1333.9	1316.6	1297.9	1277.2	1252.0	1231.3	1219.4	1213.7	1184.8	1161.3
G60.0	1305.6	1288.9	1270.9	1250.9	1226.3	1201.5	1189.3	1183.8	1161.3	1133.0
G60.5	1277.0	1261.3	1243.9	1224.6	1200.7	1174.9	1159.2	1154.2	1137.9	1108.1
G61.0	1247.0	1232.9	1217.0	1198.4	1175.2	1150.1	1129.6	1124.7	1114.7	1085.0
G61.5	1216.9	1202.9	1190.1	1172.2	1149.8	1125.3	1100.1	1095.4	1092.0	1062.0
G62.0	1187.0	1172.9	1160.6	1146.1	1124.5	1100.6	1072.9	1066.2	1065.0	1039.2
G62.5	1156.9	1142.9	1131.1	1119.3	1099.3	1076.1	1049.0	1037.1	1036.2	1016.7
G63.0	1126.9	1113.0	1101.7	1090.4	1074.2	1051.7	1025.1	1008.0	1007.4	994.4
G63.5	1096.9	1083.1	1072.3	1061.4	1048.8	1027.4	1001.3	978.8	978.6	972.3
G64.0	1066.9	1053.2	1043.0	1032.6	1020.2	1003.2	977.7	953.6	949.9	950.4
G64.5	1036.8	1023.4	1013.8	1003.8	991.7	979.1	954.2	930.4	921.2	925.8
G65.0	1006.7	993.6	984.6	975.0	963.3	952.6	930.9	907.5	892.7	896.9
G65.5	978.8	963.8	955.4	946.4	935.0	924.6	907.7	884.7	864.1	867.9
G66.0	955.4	937.4	926.2	917.8	906.7	896.7	884.7	862.2	838.7	839.0
G66.5	932.0	914.6	899.3	889.2	878.5	868.8	858.5	839.8	816.7	810.2
G67.0	908.6	891.7	877.0	860.8	850.3	840.9	831.0	817.5	795.0	781.7
G67.5	885.2	868.9	854.7	837.9	822.2	813.1	803.6	795.4	773.4	753.4
G68.0	861.8	846.1	832.4	816.2	794.1	785.2	776.3	771.4	752.0	725.4
G68.5	838.5	823.3	810.3	794.5	773.2	757.4	749.1	744.7	730.9	702.8
G69.0	815.1	800.5	788.1	773.0	752.4	729.8	722.1	718.2	709.9	682.1
G69.5	791.9	777.8	765.9	751.5	731.8	708.3	695.2	691.8	689.0	661.5
G70.0	768.6	755.1	743.8	730.1	711.2	688.4	668.5	665.6	664.4	641.2
G70.5	747.0	732.4	721.8	708.8	690.7	668.6	644.4	639.6	638.4	621.0
G71.0	727.7	712.3	699.7	687.5	670.2	648.9	625.5	613.7	612.4	601.0
G71.5	708.4	693.2	680.1	666.4	649.8	629.3	606.6	587.9	586.6	581.2
G72.0	689.1	674.1	661.2	646.5	629.5	609.8	587.8	566.0	560.9	557.7
G72.5	669.8	655.0	642.4	627.8	609.2	590.4	569.1	548.0	535.2	532.3
G73.0	650.5	635.9	623.5	609.2	590.8	571.0	550.4	530.2	509.7	507.0
G73.5	631.2	616.9	604.7	590.5	572.4	552.0	531.9	512.4	487.2	481.8

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 24)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G74.0	611.9	597.9	585.8	571.8	554.1	534.0	513.4	494.7	470.1	456.8
G74.5	592.6	578.9	567.0	553.1	535.8	516.0	495.3	477.3	453.3	432.1
G75.0	573.3	559.9	548.2	534.4	517.5	498.1	478.1	459.8	436.6	407.6
G75.5	554.5	540.9	529.4	515.7	499.3	480.3	460.9	442.4	420.1	391.4
G76.0	536.2	523.0	510.9	497.1	481.1	462.6	443.8	425.7	403.8	375.8
G76.5	517.8	505.0	493.3	478.9	462.9	444.9	426.8	409.0	387.5	360.4
G77.0	499.5	487.1	475.8	462.0	445.0	427.2	409.7	392.4	371.3	345.1
G77.5	481.2	469.2	458.3	445.0	428.8	409.7	392.7	375.9	354.9	329.9
G78.0	462.9	451.3	440.7	428.1	412.6	393.7	375.7	359.5	338.6	315.0
G78.5	444.5	433.4	423.3	411.2	396.4	378.3	359.3	343.1	322.4	300.0
G79.0	426.2	415.5	405.8	394.3	380.2	362.9	344.6	326.8	306.4	285.1
G79.5	407.9	397.5	388.3	377.5	364.1	347.6	330.1	311.6	290.5	270.3
G80.0	389.6	379.7	370.9	360.7	348.0	332.3	315.6	297.8	274.7	255.6
G80.5	370.9	361.5	353.5	343.9	332.0	317.1	301.2	284.2	260.6	241.0
G81.0	351.9	343.0	335.4	327.0	315.9	301.9	286.8	270.6	248.1	226.5
G81.5	333.0	324.4	317.1	309.2	299.5	286.7	272.5	257.0	235.7	213.5
G82.0	314.1	305.8	298.9	291.4	282.3	271.0	258.2	243.5	223.4	202.3
G82.5	295.1	287.3	280.7	273.7	265.2	254.5	243.3	230.1	211.2	191.1
G83.0	276.2	268.7	262.5	255.9	248.0	238.0	227.6	216.4	199.0	180.0
G83.5	257.3	250.2	244.3	238.2	230.9	221.6	211.9	201.4	186.9	169.0
G84.0	238.4	231.7	226.1	220.5	213.8	205.2	196.2	186.3	172.9	158.1
G84.5	219.5	213.1	207.9	202.8	196.8	188.9	180.5	171.4	158.9	146.1
G85.0	200.5	194.6	189.7	185.1	179.7	172.5	164.9	156.4	144.9	133.3
G85.5	181.9	176.3	171.7	167.4	162.7	156.2	149.3	141.5	130.9	120.5
G86.0	163.4	158.2	153.9	150.2	146.0	140.0	133.7	126.7	117.0	107.7
G86.5	144.8	140.1	136.2	133.1	129.6	124.4	118.7	111.9	103.2	95.0
G87.0	126.3	122.0	118.5	115.9	113.1	108.8	103.9	98.0	89.8	82.3
G87.5	107.7	103.9	100.7	98.7	96.7	93.2	89.2	84.1	77.1	70.5
G88.0	89.2	85.8	83.0	81.6	80.3	77.6	74.5	70.2	64.4	59.0
G88.5	70.7	67.7	65.3	64.4	63.9	62.1	59.8	56.4	51.8	47.5
G89.0	52.1	49.6	47.5	47.3	47.5	46.5	45.1	42.5	39.2	36.0
G89.5	33.6	31.5	29.8	30.1	31.1	31.0	30.4	28.7	26.5	24.5
G90.0	16.7	14.8	13.4	14.4	16.3	17.1	17.5	16.5	15.5	14.5
G90.5	32.7	29.5	27.1	28.8	31.6	32.1	32.0	30.3	28.4	26.7
G91.0	36.5	33.3	31.0	32.6	35.0	34.6	33.8	32.0	30.1	28.3
G91.5	40.3	37.1	34.9	36.4	38.4	37.1	35.7	33.6	31.8	29.9
G92.0	44.1	40.9	38.8	40.3	41.8	39.6	37.5	35.3	33.5	31.5

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 25)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G92.5	47.9	44.7	42.7	44.1	45.2	42.1	39.3	37.0	35.2	33.1
G93.0	51.8	48.5	46.6	47.9	48.6	44.6	41.1	38.7	36.9	34.8
G93.5	55.6	52.3	50.5	51.8	52.0	47.1	42.9	40.4	38.6	36.6
G94.0	59.4	56.1	54.4	55.6	55.4	49.7	44.9	42.2	40.5	38.4
G94.5	63.2	59.9	58.3	59.4	58.9	52.6	47.0	44.0	42.3	40.3
G95.0	67.0	63.8	62.2	63.2	62.5	55.5	49.1	45.9	44.2	42.1
G95.5	70.9	67.9	66.2	67.0	66.1	58.5	51.2	47.8	46.0	44.0
G96.0	74.8	71.9	70.2	70.8	69.7	61.5	53.4	49.6	47.9	45.7
G96.5	78.7	75.9	74.2	74.6	73.3	64.5	55.6	51.5	49.8	47.2
G97.0	82.6	80.0	78.2	78.4	77.0	67.6	57.7	53.4	51.4	48.8
G97.5	86.5	84.0	82.2	82.2	80.6	70.7	60.0	55.1	53.0	50.3
G98.0	90.5	88.1	86.2	86.1	84.3	73.8	61.9	56.7	54.7	51.9
G98.5	94.4	92.1	90.2	89.9	87.9	76.5	63.6	58.4	56.3	53.4
G99.0	98.3	96.1	94.2	93.7	91.3	78.8	65.3	60.0	58.0	55.3
G99.5	102.2	100.2	98.1	97.4	94.6	81.1	67.1	61.7	59.6	57.4
G100.0	106.0	104.1	102.0	101.1	97.8	83.5	68.8	63.4	61.4	59.5
G100.5	109.9	107.9	105.8	104.8	101.1	86.0	70.6	65.0	63.4	61.7
G101.0	113.7	111.7	109.7	108.6	104.5	88.4	72.4	66.9	65.4	63.8
G101.5	117.5	115.5	113.5	112.3	107.8	90.9	74.2	68.8	67.4	65.9
G102.0	121.3	119.4	117.4	116.0	111.1	93.4	76.7	70.8	69.4	68.2
G102.5	125.1	123.2	121.2	119.8	114.5	96.3	79.6	72.8	71.5	70.5
G103.0	129.0	127.0	125.1	123.5	118.0	100.2	82.4	74.8	73.5	73.0
G103.5	132.8	130.8	128.9	127.3	121.9	104.2	85.3	76.8	76.3	75.4
G104.0	136.6	134.7	132.8	131.2	126.0	108.2	88.3	78.8	79.5	78.0
G104.5	140.4	138.5	136.8	135.3	130.1	112.2	91.3	81.1	82.7	80.5
G105.0	144.3	142.5	140.9	139.3	134.1	116.3	94.3	85.1	86.1	83.3
G105.5	148.2	146.6	145.0	143.4	138.2	120.5	97.4	89.2	89.5	87.9
G106.0	152.1	150.6	149.1	147.4	142.3	124.7	101.9	93.4	92.9	92.6
G106.5	155.9	154.7	153.2	151.5	146.4	129.0	106.6	97.6	96.5	97.4
G107.0	159.8	158.7	157.3	155.5	150.5	134.0	111.5	101.8	101.8	102.4
G107.5	163.7	162.8	161.3	159.6	154.6	139.3	116.4	106.1	108.3	107.4
G108.0	167.6	166.8	165.4	163.7	160.3	144.7	121.3	110.4	114.8	112.6
G108.5	171.5	170.8	169.5	168.7	166.0	150.0	126.3	116.5	121.5	117.4
G109.0	175.4	174.9	174.1	174.7	171.7	155.4	131.4	124.5	128.3	121.4
G109.5	179.3	179.5	180.4	180.7	177.5	160.9	136.5	132.7	135.2	125.5
G110.0	184.6	185.9	186.6	186.7	183.3	166.4	144.7	141.0	142.3	129.8
G110.5	191.1	192.3	192.9	192.8	189.1	172.0	154.4	149.5	149.0	134.2

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 26)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G111.0	197.5	198.6	199.1	198.9	194.9	178.4	164.3	158.0	154.8	138.8
G111.5	204.0	205.0	205.4	205.0	200.8	188.4	174.1	166.7	160.6	143.6
G112.0	210.4	211.3	211.7	211.1	206.7	198.3	184.1	175.5	166.7	149.2
G112.5	216.9	217.7	218.0	217.2	215.8	208.3	194.1	183.6	172.9	156.9
G113.0	223.3	224.1	224.3	223.9	224.9	218.2	204.1	190.9	179.3	164.9
G113.5	229.8	230.5	230.6	232.9	234.1	228.0	214.2	198.4	185.8	173.3
G114.0	236.2	236.9	238.8	241.9	243.2	237.8	223.8	205.9	192.5	181.8
G114.5	242.7	244.7	247.9	250.9	252.4	247.6	232.0	213.5	200.6	190.6
G115.0	251.0	253.9	257.1	260.0	261.5	257.4	240.2	221.3	209.8	199.6
G115.5	260.2	263.1	266.3	269.0	270.6	266.5	248.4	229.2	219.2	208.7
G116.0	269.5	272.4	275.5	278.1	279.7	274.6	256.7	237.2	228.8	216.1
G116.5	278.7	281.6	284.6	287.2	288.9	282.6	265.0	246.0	238.5	222.4
G117.0	287.9	290.9	293.8	296.3	297.1	290.6	273.3	256.6	248.3	228.9
G117.5	297.2	300.1	303.0	305.4	305.3	298.7	281.7	267.4	258.3	235.6
G118.0	306.4	309.4	312.2	314.0	313.4	306.9	290.2	278.4	268.5	242.6
G118.5	315.7	318.6	321.4	322.4	321.7	315.1	300.0	289.4	278.0	249.8
G119.0	324.9	327.9	330.1	330.8	329.9	323.3	310.8	300.5	285.6	257.2
G119.5	334.2	336.9	338.7	339.3	338.1	331.6	321.6	311.7	293.5	264.8
G120.0	343.2	345.8	347.4	347.8	346.4	340.3	332.3	322.9	301.5	273.5
G120.5	352.3	354.6	356.2	356.3	354.7	350.2	343.1	334.2	309.7	283.8
G121.0	361.3	363.5	364.9	364.8	363.1	360.1	353.8	343.7	318.0	294.2
G121.5	370.4	372.4	373.7	373.4	372.1	370.0	364.5	352.4	326.6	304.6
G122.0	379.4	381.3	382.4	381.9	381.6	380.0	375.2	361.0	335.2	315.1
G122.5	388.5	390.3	391.2	390.7	391.0	389.9	385.8	369.7	344.1	325.7
G123.0	397.6	399.2	400.0	400.3	400.5	399.7	395.1	378.5	354.0	336.3
G123.5	406.6	408.1	409.0	409.8	410.0	409.6	403.6	387.5	364.7	347.1
G124.0	415.7	417.0	418.4	419.4	419.5	419.5	412.0	396.4	375.6	357.9
G124.5	424.8	426.4	427.9	428.9	429.0	429.3	420.5	405.4	386.6	367.8
G125.0	434.1	435.8	437.4	438.5	438.5	437.6	428.9	414.4	397.8	375.4
G125.5	443.5	445.2	446.8	448.1	448.1	445.9	437.4	424.1	409.0	383.1
G126.0	452.8	454.7	456.3	457.7	457.8	454.2	445.9	434.4	420.4	391.0
G126.5	462.2	464.1	465.8	467.2	466.2	462.5	454.5	444.7	431.9	399.0
G127.0	471.6	473.5	475.3	476.8	474.6	470.9	463.0	455.0	443.3	407.2
G127.5	481.0	482.9	484.8	485.8	483.1	479.3	471.6	465.4	454.5	415.6
G128.0	490.3	492.3	494.3	494.4	491.5	487.8	481.0	475.6	462.7	424.1
G128.5	499.7	501.8	503.4	503.0	500.0	496.3	490.4	485.7	470.9	432.8
G129.0	509.1	511.2	512.2	511.6	508.6	504.8	499.7	495.8	479.0	441.8

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 27)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G129.5	518.4	520.1	521.0	520.3	517.2	513.4	509.0	505.9	487.5	452.3
G130.0	527.5	529.0	529.7	529.0	525.8	522.2	518.4	515.8	496.0	465.4
G130.5	536.5	537.9	538.5	537.7	534.5	530.9	527.7	523.9	504.4	478.7
G131.0	545.5	546.8	547.3	546.4	543.2	539.6	537.0	531.6	513.0	492.2
G131.5	554.5	555.7	556.2	555.1	551.6	548.3	546.2	539.3	521.8	505.6
G132.0	563.6	564.7	565.0	563.9	559.9	556.9	555.4	546.9	530.4	519.1
G132.5	572.7	573.6	573.8	572.1	568.2	565.5	564.2	554.7	539.1	532.6
G133.0	581.7	582.5	582.7	579.9	576.5	574.0	571.5	562.5	550.4	545.8
G133.5	590.8	591.5	590.8	587.8	584.8	582.5	578.8	570.3	561.7	558.7
G134.0	599.9	600.4	598.3	595.7	593.1	591.1	586.0	578.1	572.9	571.7
G134.5	609.0	607.6	605.8	603.5	601.3	599.1	593.4	585.9	583.9	584.1
G135.0	616.1	614.7	613.3	611.3	609.5	606.2	600.8	593.9	594.6	595.2
G135.5	623.0	621.8	620.6	619.1	617.7	613.3	608.1	602.4	605.2	604.5
G136.0	629.9	628.9	628.0	626.9	625.5	620.4	615.4	612.0	615.8	613.6
G136.5	636.7	636.0	635.4	634.6	632.4	627.5	622.8	621.5	626.2	622.7
G137.0	643.5	643.1	642.8	642.2	639.2	634.7	630.1	631.0	636.6	632.0
G137.5	650.3	650.2	650.1	649.2	645.9	641.7	637.4	640.5	646.9	640.8
G138.0	657.1	657.2	657.4	655.8	652.7	648.8	646.2	650.0	657.0	649.9
G138.5	663.9	664.3	664.4	662.5	659.5	655.9	655.2	659.5	665.0	658.9
G139.0	670.6	671.3	670.9	669.1	666.4	663.0	664.2	668.8	672.8	667.6
G139.5	677.4	677.8	677.5	675.8	673.2	670.2	673.0	678.0	680.6	676.4
G140.0	683.9	684.3	684.0	682.5	680.0	678.6	681.8	687.3	688.4	685.1
G140.5	690.4	690.7	690.6	689.1	686.8	687.0	690.6	696.4	696.2	693.8
G141.0	696.8	697.3	697.1	695.8	693.5	695.4	699.3	704.7	703.9	702.2
G141.5	703.3	703.8	703.7	702.4	701.3	703.8	708.0	712.1	711.7	708.9
G142.0	709.9	710.3	710.3	709.2	709.4	712.1	716.6	719.5	719.4	715.4
G142.5	716.4	716.8	716.9	716.2	717.4	720.4	725.3	726.9	727.2	721.8
G143.0	722.9	723.3	723.5	723.8	725.4	728.7	733.7	734.4	735.0	727.8
G143.5	729.4	729.8	730.3	731.4	733.4	736.9	740.8	741.8	742.9	733.8
G144.0	735.9	736.3	737.6	739.1	741.3	744.9	747.8	749.2	750.6	740.2
G144.5	742.4	743.2	744.8	746.6	749.2	752.8	754.9	756.7	756.8	746.9
G145.0	749.1	750.2	752.0	754.1	757.0	760.4	762.0	764.2	763.0	753.7
G145.5	755.8	757.2	759.2	761.6	764.7	767.2	769.0	771.5	769.2	760.9
G146.0	762.6	764.2	766.4	769.1	772.4	774.1	776.1	778.8	775.2	768.3
G146.5	769.3	771.2	773.5	776.6	779.7	780.9	783.1	786.2	781.5	775.7
G147.0	776.1	778.2	780.6	784.0	786.4	787.8	790.2	791.6	787.3	782.7
G147.5	782.9	785.1	787.7	791.4	793.1	794.6	797.3	796.5	793.0	789.9

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 28)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G148.0	789.6	792.0	794.8	797.9	799.7	801.4	804.3	801.3	798.6	793.0
G148.5	796.4	798.9	801.8	804.5	806.5	808.3	811.3	805.8	803.7	795.2
G149.0	803.2	805.8	808.3	811.0	813.2	815.2	816.2	810.1	808.7	797.9
G149.5	810.0	812.4	814.8	817.6	819.8	822.1	820.1	814.4	813.4	799.6
G150.0	816.6	818.8	821.2	824.2	826.5	828.9	823.7	818.5	817.7	801.5
G150.5	823.0	825.3	827.7	830.7	833.2	834.8	827.4	822.4	821.7	803.0
G151.0	829.4	831.7	834.1	837.3	839.9	838.6	831.1	826.2	821.8	804.0
G151.5	835.9	838.2	840.6	843.8	846.5	842.3	835.0	829.9	821.6	805.1
G152.0	842.4	844.7	847.1	850.3	851.4	846.0	839.0	833.4	821.3	805.3
G152.5	848.8	851.2	853.6	856.9	855.2	849.8	843.2	836.8	820.5	805.5
G153.0	855.3	857.6	860.1	862.4	859.0	853.7	847.3	838.5	819.5	805.3
G153.5	861.8	864.0	866.5	866.7	863.1	857.7	851.4	837.7	818.2	804.5
G154.0	868.4	870.5	871.4	870.9	867.3	861.7	855.5	836.8	816.8	803.4
G154.5	874.9	875.9	876.0	875.3	871.5	865.8	859.6	836.0	815.1	801.8
G155.0	880.0	880.2	880.5	879.8	875.9	869.9	859.5	835.3	813.4	799.7
G155.5	884.4	884.6	885.1	884.4	880.5	874.3	858.8	834.7	812.3	797.7
G156.0	888.8	888.9	889.6	889.2	885.1	878.8	858.2	834.3	810.8	795.7
G156.5	893.2	893.3	894.2	893.7	889.8	878.8	857.8	834.3	810.1	793.9
G157.0	897.5	897.6	898.7	898.4	894.7	878.6	857.6	834.3	810.1	793.4
G157.5	901.8	902.0	903.1	903.2	897.0	878.8	857.7	834.6	810.3	793.4
G158.0	906.1	906.4	907.6	908.0	897.6	879.2	857.9	835.2	812.6	794.2
G158.5	910.4	910.7	912.1	910.1	898.6	879.9	858.6	835.9	815.2	796.6
G159.0	914.7	915.2	915.6	911.5	900.0	881.0	859.4	836.9	818.1	799.3
G159.5	918.9	918.8	917.1	913.0	901.8	882.5	860.4	839.1	821.3	802.7
G160.0	921.7	920.5	918.7	914.8	903.8	884.4	862.2	842.4	824.8	806.5
G160.5	923.3	922.2	920.3	916.8	905.9	886.7	864.2	846.4	828.7	810.7
G161.0	924.9	923.8	922.0	918.8	908.5	889.6	868.0	850.7	833.0	815.2
G161.5	926.6	925.5	923.7	920.5	911.4	892.8	873.6	855.5	837.7	820.0
G162.0	928.2	927.1	925.4	922.4	914.3	897.0	879.8	861.5	843.2	825.6
G162.5	930.0	928.8	927.1	924.4	916.9	903.3	886.5	867.9	849.3	831.4
G163.0	931.6	930.5	928.9	926.5	920.2	909.2	893.6	875.0	855.9	837.5
G163.5	933.4	932.2	930.6	928.5	924.2	915.0	900.8	883.0	864.0	842.9
G164.0	935.0	933.9	932.3	930.9	927.8	920.8	908.4	891.5	872.5	848.5
G164.5	936.8	935.7	934.3	933.3	930.8	925.5	915.6	900.2	881.8	855.3
G165.0	938.5	937.7	936.5	935.6	933.7	929.6	921.7	908.7	889.8	862.5
G165.5	940.4	939.7	938.6	937.9	936.6	933.6	927.8	917.6	897.0	870.3
G166.0	942.2	941.7	940.8	940.2	939.3	937.5	933.5	925.5	904.0	878.9

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 29)

Unit: cd

G\C	C100.0	C105.0	C110.0	C115.0	C120.0	C125.0	C130.0	C135.0	C140.0	C145.0
G166.5	944.0	943.7	942.9	942.3	941.6	940.3	937.5	929.3	911.4	887.9
G167.0	945.8	945.6	945.0	944.4	944.0	943.1	941.4	933.9	918.8	897.1
G167.5	947.7	947.6	947.1	946.6	946.2	945.9	944.2	937.8	924.9	906.8
G168.0	949.5	949.5	949.2	948.8	948.5	948.2	946.2	941.1	931.8	916.0
G168.5	951.3	951.4	951.3	950.9	950.7	950.0	948.4	945.1	937.5	924.7
G169.0	953.1	953.2	953.2	953.0	952.5	951.8	950.8	948.1	942.3	934.1
G169.5	954.8	955.1	955.1	954.8	954.3	953.8	952.9	950.9	947.7	940.1
G170.0	956.6	956.8	956.8	956.6	956.1	955.7	954.9	953.9	951.1	946.7
G170.5	958.2	958.4	958.4	958.3	957.9	957.5	957.1	956.2	954.5	951.7
G171.0	959.9	960.1	960.2	959.9	959.7	959.4	959.1	958.5	957.7	955.6
G171.5	961.6	961.8	961.8	961.7	961.5	961.3	961.0	960.9	960.2	959.7
G172.0	963.3	963.5	963.5	963.4	963.3	963.1	963.1	962.9	962.7	962.7
G172.5	965.0	965.2	965.2	965.2	965.1	964.9	964.9	964.9	965.1	965.8
G173.0	966.7	966.9	966.9	966.9	966.8	966.8	966.8	967.0	967.5	968.3
G173.5	968.5	968.6	968.7	968.7	968.7	968.6	968.7	969.1	969.8	970.6
G174.0	970.2	970.3	970.5	970.4	970.5	970.5	970.8	971.3	972.0	972.8
G174.5	971.9	972.0	972.2	972.2	972.4	972.6	973.0	973.4	974.1	974.8
G175.0	973.6	973.8	973.9	974.2	974.3	974.7	975.0	975.5	976.1	976.9
G175.5	975.4	975.6	975.7	976.1	976.3	976.6	977.1	977.6	978.1	978.8
G176.0	977.2	977.4	977.5	977.8	978.2	978.5	978.9	979.5	980.1	980.7
G176.5	979.0	979.2	979.3	979.6	979.9	980.4	980.7	981.2	981.8	982.5
G177.0	980.8	980.9	981.1	981.3	981.6	981.9	982.4	982.9	983.4	984.0
G177.5	982.6	982.7	982.8	983.1	983.3	983.6	984.0	984.4	984.9	985.4
G178.0	984.4	984.5	984.6	984.8	985.0	985.3	985.5	985.9	986.3	986.7
G178.5	986.2	986.3	986.4	986.5	986.7	986.9	987.1	987.3	987.7	988.0
G179.0	988.1	988.1	988.2	988.2	988.3	988.5	988.7	988.8	989.0	989.2
G179.5	989.9	989.9	989.9	990.0	990.0	990.1	990.2	990.3	990.4	990.5
G180.0	991.7	991.7	991.7	991.7	991.7	991.7	991.7	991.7	991.7	991.7

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 30)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G0.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0
G0.5	3994.6	3995.3	3996.0	3997.1	3998.2	3998.9	4000.0	3999.2	3998.2	3997.4
G1.0	3984.1	3985.6	3987.4	3989.2	3991.3	3993.1	3995.3	3993.5	3991.7	3989.9
G1.5	3974.4	3976.9	3979.4	3982.3	3985.2	3988.4	3991.7	3988.8	3985.9	3983.4
G2.0	3965.0	3968.3	3971.9	3975.5	3979.4	3983.4	3987.7	3983.8	3980.2	3976.9
G2.5	3955.7	3959.6	3964.3	3969.0	3974.0	3979.4	3984.8	3979.8	3975.1	3970.8
G3.0	3946.3	3951.4	3956.8	3962.5	3968.6	3975.1	3982.0	3975.8	3970.1	3964.7
G3.5	3936.2	3941.6	3947.4	3953.9	3960.7	3968.3	3975.8	3969.0	3962.5	3956.0
G4.0	3924.4	3930.5	3937.3	3944.5	3952.8	3961.1	3970.1	3962.2	3954.2	3947.0
G4.5	3912.5	3919.3	3926.5	3934.4	3943.4	3952.8	3962.9	3953.5	3945.2	3937.3
G5.0	3899.9	3907.1	3915.4	3924.0	3933.7	3944.2	3955.3	3945.2	3935.9	3927.2
G5.5	3887.3	3895.2	3903.8	3913.6	3924.4	3935.9	3948.5	3937.3	3926.5	3917.2
G6.0	3874.0	3882.2	3892.0	3902.8	3914.6	3927.6	3941.3	3929.0	3917.5	3906.7
G6.5	3860.3	3869.3	3879.4	3890.5	3903.5	3917.5	3932.6	3919.0	3906.4	3894.8
G7.0	3845.9	3854.5	3865.0	3877.2	3891.2	3907.1	3923.6	3908.5	3894.5	3881.9
G7.5	3829.3	3838.3	3849.8	3862.4	3876.8	3893.0	3910.7	3894.5	3880.1	3867.5
G8.0	3812.0	3821.4	3832.9	3846.2	3861.4	3878.6	3897.4	3880.4	3865.0	3851.3
G8.5	3794.0	3803.8	3815.6	3830.0	3846.2	3864.2	3884.0	3866.0	3849.8	3835.4
G9.0	3775.7	3786.1	3799.1	3813.8	3830.8	3849.5	3870.4	3851.6	3835.1	3820.0
G9.5	3758.0	3769.2	3782.5	3798.0	3815.6	3836.2	3858.5	3838.3	3820.3	3804.5
G10.0	3741.1	3752.3	3765.6	3781.8	3800.9	3822.5	3846.2	3825.0	3805.9	3789.0
G10.5	3726.0	3733.9	3748.0	3764.9	3784.7	3807.4	3832.6	3809.9	3789.7	3772.8
G11.0	3709.4	3715.2	3729.6	3746.9	3768.1	3791.9	3818.9	3794.8	3773.2	3754.8
G11.5	3693.6	3695.4	3710.2	3728.9	3750.5	3775.0	3802.7	3777.5	3755.5	3736.8
G12.0	3676.3	3676.7	3691.1	3710.2	3732.5	3758.0	3786.5	3760.2	3737.5	3717.7
G12.5	3659.0	3659.8	3672.0	3691.4	3714.5	3741.1	3770.6	3743.6	3719.5	3699.0
G13.0	3641.8	3642.8	3652.6	3672.7	3696.5	3724.2	3755.2	3726.7	3701.9	3680.6
G13.5	3624.8	3625.6	3632.8	3653.3	3677.4	3706.6	3739.7	3709.4	3683.2	3661.9
G14.0	3607.9	3607.9	3611.9	3631.7	3657.6	3688.6	3723.8	3691.8	3664.1	3641.0
G14.5	3590.7	3590.0	3589.3	3610.1	3636.0	3667.7	3704.4	3671.3	3642.8	3619.8
G15.0	3573.8	3570.0	3568.4	3586.1	3613.7	3646.4	3685.0	3650.0	3620.5	3596.5
G15.5	3555.0	3550.2	3546.4	3562.1	3590.8	3624.5	3663.4	3628.1	3598.1	3572.9
G16.0	3536.4	3528.8	3524.6	3539.1	3568.2	3602.2	3641.4	3606.1	3575.7	3550.2
G16.5	3516.6	3507.5	3504.2	3516.4	3545.9	3581.1	3622.0	3585.1	3553.6	3527.7
G17.0	3496.0	3486.8	3483.8	3493.2	3523.6	3560.1	3602.2	3564.3	3531.8	3505.2
G17.5	3475.5	3466.1	3462.9	3469.9	3500.6	3538.2	3582.2	3542.5	3509.2	3482.6
G18.0	3454.8	3445.7	3442.2	3444.8	3476.6	3516.0	3562.1	3520.4	3485.4	3458.1

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 31)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G18.5	3434.0	3425.5	3420.0	3419.2	3452.0	3492.1	3539.3	3496.5	3460.9	3432.7
G19.0	3414.4	3404.9	3397.5	3394.7	3426.6	3467.9	3516.6	3472.2	3435.3	3408.2
G19.5	3394.5	3383.4	3374.6	3371.0	3401.0	3443.0	3492.5	3447.3	3409.6	3384.3
G20.0	3370.2	3361.9	3351.3	3347.2	3375.1	3417.9	3468.5	3422.2	3383.8	3360.5
G20.5	3345.0	3339.2	3328.1	3323.3	3349.1	3392.7	3444.4	3397.2	3358.0	3336.8
G21.0	3319.5	3316.6	3304.9	3299.5	3323.0	3367.5	3420.3	3372.2	3332.3	3313.2
G21.5	3293.0	3294.3	3281.8	3275.6	3296.6	3341.9	3396.5	3346.6	3306.1	3289.7
G22.0	3266.5	3272.0	3258.5	3251.1	3269.2	3316.2	3372.7	3320.9	3278.8	3265.5
G22.5	3240.0	3249.6	3235.1	3225.9	3241.3	3288.9	3347.0	3293.7	3250.8	3240.5
G23.0	3213.5	3224.1	3210.9	3200.1	3211.9	3261.2	3321.3	3266.1	3221.6	3215.0
G23.5	3186.8	3196.9	3186.9	3173.4	3182.5	3232.7	3293.2	3237.7	3192.4	3188.4
G24.0	3159.6	3169.2	3161.6	3146.9	3153.4	3204.0	3265.1	3209.1	3163.6	3162.0
G24.5	3132.3	3141.3	3136.4	3120.4	3124.5	3175.8	3237.9	3181.1	3135.0	3136.0
G25.0	3104.1	3112.1	3110.6	3094.2	3095.9	3147.8	3210.7	3153.1	3106.5	3110.0
G25.5	3075.7	3083.0	3084.8	3068.2	3066.9	3119.3	3184.4	3124.7	3077.7	3084.4
G26.0	3046.6	3053.1	3059.3	3042.2	3036.2	3090.6	3158.1	3096.0	3047.1	3058.8
G26.5	3017.2	3023.3	3034.1	3015.0	3005.4	3060.9	3129.1	3066.3	3016.4	3031.9
G27.0	2987.7	2993.6	3008.8	2988.1	2976.0	3030.9	3100.1	3036.3	2986.9	3005.1
G27.5	2958.5	2964.0	2981.5	2960.4	2947.9	3001.2	3070.8	3006.5	2958.7	2977.5
G28.0	2929.4	2934.0	2951.1	2932.7	2920.4	2971.5	3041.5	2976.7	2931.1	2949.9
G28.5	2903.5	2903.4	2919.7	2905.8	2892.9	2941.7	3013.2	2947.0	2903.5	2922.8
G29.0	2879.9	2872.6	2888.6	2878.9	2864.6	2911.9	2984.9	2917.2	2875.2	2895.8
G29.5	2855.8	2842.0	2858.1	2852.1	2836.3	2881.1	2955.9	2886.4	2846.9	2868.8
G30.0	2831.3	2811.6	2827.8	2825.3	2806.4	2849.9	2926.8	2855.3	2817.2	2842.0
G30.5	2807.2	2781.6	2797.3	2797.6	2776.7	2817.9	2895.8	2823.4	2787.6	2814.3
G31.0	2783.5	2751.7	2766.7	2769.7	2746.4	2785.5	2864.7	2791.2	2757.6	2786.5
G31.5	2759.8	2721.1	2735.0	2741.1	2716.1	2753.4	2832.8	2759.1	2727.6	2758.1
G32.0	2736.6	2689.8	2703.0	2712.3	2686.6	2721.3	2800.9	2727.2	2698.3	2729.4
G32.5	2713.8	2659.6	2670.4	2683.5	2657.1	2689.9	2770.3	2695.7	2669.0	2701.0
G33.0	2690.9	2633.3	2637.5	2654.6	2628.2	2658.7	2739.7	2664.4	2640.0	2672.6
G33.5	2667.8	2607.2	2604.9	2626.1	2599.3	2627.4	2710.0	2632.8	2611.1	2644.5
G34.0	2645.1	2581.1	2572.3	2598.1	2570.0	2595.8	2680.2	2601.2	2581.6	2616.8
G34.5	2621.2	2555.1	2540.1	2568.2	2540.7	2563.8	2649.3	2569.3	2552.0	2586.8
G35.0	2597.4	2529.5	2507.9	2536.2	2511.1	2531.7	2618.4	2537.2	2522.4	2554.2
G35.5	2573.5	2504.2	2475.8	2504.0	2481.5	2500.3	2586.9	2505.6	2492.7	2521.5
G36.0	2549.4	2479.0	2443.3	2471.3	2452.5	2469.1	2555.5	2474.2	2463.7	2488.6
G36.5	2515.7	2453.9	2410.8	2438.7	2423.8	2437.7	2525.8	2442.5	2434.8	2455.8

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 32)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G37.0	2481.2	2429.0	2378.3	2406.2	2395.0	2406.1	2496.1	2410.5	2405.7	2423.3
G37.5	2446.8	2403.7	2345.9	2373.9	2366.4	2373.5	2464.9	2377.9	2376.4	2390.8
G38.0	2412.6	2378.7	2314.3	2342.4	2337.0	2340.4	2433.7	2345.0	2346.7	2358.3
G38.5	2378.6	2353.6	2287.9	2310.9	2307.3	2307.7	2401.1	2312.4	2316.6	2325.7
G39.0	2344.5	2328.6	2262.1	2278.2	2277.6	2275.2	2368.5	2280.0	2286.9	2292.6
G39.5	2310.3	2303.9	2236.0	2245.3	2247.7	2243.3	2337.2	2247.8	2257.4	2259.5
G40.0	2276.1	2279.4	2209.8	2212.1	2218.4	2211.6	2305.9	2215.7	2228.2	2226.6
G40.5	2242.1	2255.1	2183.0	2178.9	2189.5	2179.5	2275.0	2183.5	2199.2	2193.8
G41.0	2208.3	2226.5	2156.5	2146.6	2160.8	2147.3	2244.1	2151.1	2170.0	2161.0
G41.5	2174.7	2193.3	2130.3	2114.6	2132.3	2114.7	2212.6	2118.6	2140.8	2128.1
G42.0	2141.9	2159.5	2104.2	2082.5	2103.5	2081.8	2181.2	2085.9	2111.7	2095.2
G42.5	2109.2	2125.6	2078.9	2050.1	2074.4	2049.8	2149.1	2053.7	2082.5	2062.3
G43.0	2076.6	2091.3	2053.8	2017.5	2045.3	2018.2	2116.9	2021.9	2053.4	2029.6
G43.5	2047.9	2056.8	2028.7	1984.6	2016.2	1987.1	2086.1	1990.4	2024.5	1997.0
G44.0	2019.4	2022.5	2003.9	1952.1	1987.6	1956.2	2055.3	1959.1	1995.8	1964.5
G44.5	1990.5	1989.3	1978.9	1920.6	1959.9	1924.6	2025.1	1927.3	1967.7	1932.4
G45.0	1961.9	1956.2	1953.6	1889.4	1932.4	1892.6	1995.0	1895.1	1939.7	1900.3
G45.5	1933.8	1923.1	1928.5	1858.6	1904.9	1862.3	1963.5	1864.8	1911.3	1868.3
G46.0	1906.1	1889.8	1903.6	1827.9	1873.6	1832.6	1932.0	1835.1	1879.3	1836.4
G46.5	1878.6	1856.4	1878.6	1801.7	1841.6	1803.6	1900.9	1805.8	1847.0	1810.0
G47.0	1851.6	1823.0	1851.2	1775.8	1809.6	1774.9	1869.7	1776.9	1814.8	1783.8
G47.5	1825.0	1789.6	1819.0	1750.1	1778.0	1746.4	1839.6	1747.9	1783.0	1758.0
G48.0	1798.5	1759.4	1786.8	1724.6	1746.6	1718.1	1809.5	1719.1	1751.3	1732.4
G48.5	1772.4	1732.6	1754.7	1699.8	1716.0	1689.6	1779.5	1690.5	1719.7	1706.9
G49.0	1746.6	1706.0	1722.3	1675.2	1685.5	1661.2	1749.5	1661.9	1688.1	1681.7
G49.5	1714.4	1679.7	1689.6	1650.9	1654.8	1632.9	1719.5	1633.4	1656.8	1656.4
G50.0	1680.2	1653.6	1657.1	1626.9	1624.1	1604.6	1689.6	1605.0	1625.5	1631.3
G50.5	1646.3	1627.3	1625.2	1602.9	1593.4	1576.8	1659.6	1577.1	1594.5	1606.4
G51.0	1613.1	1601.4	1593.6	1579.0	1562.7	1549.6	1629.5	1549.7	1563.6	1581.7
G51.5	1580.2	1575.6	1562.3	1555.2	1532.4	1522.7	1601.0	1522.4	1532.9	1557.1
G52.0	1547.7	1550.1	1531.2	1531.4	1502.4	1496.0	1572.5	1495.3	1502.3	1533.2
G52.5	1515.6	1524.8	1499.9	1507.7	1472.9	1468.9	1544.2	1468.0	1472.0	1509.3
G53.0	1483.7	1500.0	1468.4	1484.7	1443.6	1441.5	1516.0	1440.4	1441.8	1485.9
G53.5	1451.7	1475.4	1437.0	1461.7	1413.9	1414.2	1486.1	1413.1	1411.7	1462.6
G54.0	1419.8	1447.9	1408.7	1439.4	1384.0	1387.1	1456.2	1386.1	1381.8	1439.4
G54.5	1388.4	1416.1	1383.2	1417.2	1354.0	1360.5	1427.5	1359.5	1352.0	1416.2
G55.0	1365.1	1384.3	1358.2	1388.0	1323.9	1334.6	1398.8	1333.5	1322.2	1385.8

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 33)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G55.5	1342.2	1352.4	1333.6	1357.3	1294.5	1308.8	1371.9	1307.7	1292.7	1354.1
G56.0	1319.4	1320.5	1309.2	1326.3	1265.7	1283.3	1344.9	1281.9	1263.3	1323.0
G56.5	1297.2	1288.7	1285.2	1295.1	1237.0	1257.8	1317.5	1256.2	1234.0	1292.3
G57.0	1275.2	1257.1	1261.4	1264.0	1208.4	1232.1	1290.1	1230.5	1205.1	1261.7
G57.5	1253.5	1225.8	1237.7	1233.3	1184.6	1206.6	1262.1	1205.0	1181.3	1230.8
G58.0	1232.1	1194.9	1214.3	1202.7	1161.3	1181.2	1234.1	1179.6	1158.3	1200.1
G58.5	1210.9	1164.5	1191.1	1172.8	1138.4	1156.0	1206.9	1154.4	1135.3	1169.5
G59.0	1190.1	1136.1	1168.1	1143.0	1115.8	1131.4	1179.8	1129.6	1112.6	1139.1
G59.5	1164.4	1114.5	1142.9	1113.2	1093.4	1106.9	1153.4	1104.9	1090.0	1109.3
G60.0	1135.3	1093.2	1111.8	1083.3	1071.8	1083.0	1127.1	1080.7	1067.9	1079.7
G60.5	1106.2	1072.2	1081.0	1053.5	1050.3	1059.2	1100.7	1056.6	1045.9	1050.0
G61.0	1077.5	1051.2	1050.6	1024.5	1029.3	1035.5	1074.3	1032.9	1024.6	1020.7
G61.5	1049.0	1030.7	1020.5	1001.6	1008.5	1012.0	1048.1	1009.4	1003.3	997.6
G62.0	1020.9	1010.4	990.6	979.5	987.9	988.7	1022.0	986.1	982.7	975.1
G62.5	993.1	990.5	960.8	957.6	967.5	965.5	996.7	962.9	962.4	952.8
G63.0	965.6	970.8	931.2	936.2	947.4	942.8	971.4	940.0	942.2	931.5
G63.5	939.0	947.5	901.7	915.1	927.5	920.2	946.4	917.2	922.2	910.4
G64.0	916.8	919.8	873.1	894.3	907.8	895.5	921.4	892.4	902.4	889.7
G64.5	894.8	892.4	853.5	874.0	888.3	869.3	896.6	866.1	882.4	869.4
G65.0	873.0	865.2	834.6	854.0	860.1	843.3	871.8	840.0	854.1	849.5
G65.5	851.6	838.2	816.0	834.2	832.3	817.4	848.0	813.9	826.1	829.8
G66.0	830.3	811.4	797.7	812.0	804.7	792.1	824.2	788.2	798.4	807.6
G66.5	809.4	784.9	779.9	783.4	777.5	766.8	800.9	762.4	770.8	778.9
G67.0	788.8	758.5	762.4	755.0	750.2	742.0	777.6	736.9	743.3	750.3
G67.5	764.2	736.9	745.4	727.0	723.4	717.1	754.2	711.4	715.6	722.1
G68.0	736.1	716.5	725.6	699.3	696.7	692.3	730.9	686.3	687.8	694.1
G68.5	708.3	696.5	699.9	671.7	670.4	667.4	708.1	661.2	660.5	666.3
G69.0	680.7	676.8	674.1	644.5	644.1	642.6	685.3	636.3	633.5	638.6
G69.5	653.4	657.5	648.4	617.5	617.6	617.9	663.1	611.3	606.8	611.0
G70.0	626.4	638.5	622.8	596.6	597.6	593.6	640.9	586.6	587.2	589.6
G70.5	599.4	619.3	597.6	580.5	579.1	569.3	619.1	562.0	569.1	573.0
G71.0	576.9	592.3	572.7	564.7	561.0	545.3	597.2	537.7	551.2	556.9
G71.5	557.6	566.0	552.8	549.3	543.1	521.4	575.7	513.5	533.8	541.4
G72.0	538.5	539.9	534.6	534.4	525.5	498.0	554.1	489.9	517.0	526.3
G72.5	519.6	514.0	516.7	519.8	508.1	481.4	532.7	472.9	500.5	511.5
G73.0	501.0	488.4	499.1	502.3	491.1	465.1	511.3	456.2	484.7	494.2
G73.5	482.6	462.8	481.8	476.6	468.6	449.1	490.0	439.9	464.0	469.0

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 34)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G74.0	463.2	444.8	464.5	450.0	440.2	433.6	468.7	423.9	437.8	444.2
G74.5	438.9	427.2	437.9	422.7	412.1	418.6	447.7	408.3	412.0	419.7
G75.0	414.8	410.0	411.6	394.9	384.0	404.0	426.6	393.2	386.3	395.4
G75.5	390.8	393.0	385.5	367.1	356.3	390.0	406.3	378.5	361.0	371.6
G76.0	367.0	376.4	359.6	350.2	328.5	376.4	385.9	364.2	335.7	356.8
G76.5	343.4	357.1	333.8	334.1	312.4	363.4	366.3	350.9	321.4	342.4
G77.0	322.2	333.8	316.8	319.0	298.5	339.2	346.7	327.9	309.5	328.5
G77.5	307.9	310.4	300.7	304.5	284.8	312.9	327.5	304.2	298.1	315.1
G78.0	293.8	287.0	284.9	283.8	271.7	285.7	308.4	280.2	287.5	296.4
G78.5	279.8	263.7	269.4	257.1	253.1	256.1	289.8	256.2	272.0	272.3
G79.0	266.1	243.4	251.3	231.1	225.3	225.9	271.3	232.2	248.3	248.4
G79.5	252.5	230.7	227.7	205.6	197.5	198.9	253.6	210.6	224.9	224.8
G80.0	238.8	218.2	204.2	187.3	169.7	185.1	235.9	199.5	201.6	207.4
G80.5	225.0	206.0	180.9	175.3	155.5	172.9	218.6	189.2	187.3	195.4
G81.0	211.4	194.0	159.3	163.8	147.5	162.0	201.3	179.8	177.4	183.9
G81.5	197.9	181.3	148.6	152.8	140.0	149.3	184.4	168.5	168.2	172.7
G82.0	184.5	167.8	138.3	132.5	125.6	124.2	167.6	144.3	151.5	152.1
G82.5	172.0	154.4	128.2	113.0	106.3	100.2	151.6	120.2	129.2	131.8
G83.0	162.0	141.3	118.1	94.2	87.8	81.3	135.6	100.2	107.1	111.7
G83.5	152.1	128.3	107.1	84.3	80.3	76.7	120.6	95.4	97.1	100.7
G84.0	142.3	119.9	96.6	77.1	75.1	73.3	105.7	91.8	89.7	92.7
G84.5	132.6	112.0	86.3	70.1	66.1	58.0	92.0	73.2	77.5	85.0
G85.0	122.7	104.3	78.3	62.8	52.3	41.3	78.4	52.2	59.0	74.9
G85.5	111.0	96.7	72.7	55.4	41.6	39.8	66.3	48.5	44.3	64.2
G86.0	99.4	87.6	67.3	48.2	38.5	34.5	54.2	40.5	39.9	53.8
G86.5	87.8	77.1	62.0	44.4	34.9	21.7	42.5	21.7	34.9	48.4
G87.0	76.2	66.8	54.2	40.8	29.0	20.8	30.8	19.2	26.3	43.5
G87.5	64.7	56.5	46.3	36.9	24.6	13.4	21.9	10.0	20.1	38.1
G88.0	54.4	46.7	38.4	31.3	23.4	10.4	13.0	4.9	18.8	30.0
G88.5	44.0	38.2	31.3	25.8	20.8	9.1	10.6	3.9	15.4	22.1
G89.0	33.7	29.8	25.1	21.0	16.7	9.6	8.2	3.9	10.0	15.3
G89.5	23.4	21.3	18.9	16.7	14.1	9.4	8.9	3.8	6.4	9.3
G90.0	14.6	14.4	14.1	13.7	13.2	11.4	10.7	4.3	3.8	3.7
G90.5	26.6	26.0	25.1	24.1	22.2	17.8	7.5	7.9	7.8	8.0
G91.0	28.1	27.2	25.8	24.4	21.9	17.2	7.9	8.6	9.0	9.5
G91.5	29.5	28.3	26.5	24.8	22.3	15.9	8.6	9.0	10.3	11.2
G92.0	30.9	29.5	27.4	25.2	22.1	15.6	9.3	9.9	11.4	13.1

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 35)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G92.5	32.3	30.8	28.5	25.6	21.4	16.1	11.7	10.7	12.1	15.0
G93.0	33.9	32.2	29.6	25.8	21.7	18.2	14.0	12.5	13.7	16.4
G93.5	35.5	33.7	30.6	26.0	22.5	18.5	17.0	12.4	15.8	17.7
G94.0	37.2	35.1	31.2	26.2	22.8	22.0	19.9	15.9	17.1	19.0
G94.5	38.8	36.3	31.8	27.0	23.2	23.4	22.2	17.2	18.3	21.4
G95.0	40.4	37.4	32.4	27.9	25.4	24.2	24.4	17.4	21.5	23.9
G95.5	41.8	38.4	33.5	28.8	28.3	27.5	27.1	22.6	25.6	26.2
G96.0	43.1	39.5	35.0	29.8	30.2	30.5	29.7	27.4	28.3	28.1
G96.5	44.5	40.7	36.5	30.8	31.4	31.0	32.8	28.4	30.0	30.0
G97.0	45.8	42.4	38.1	32.3	33.0	31.8	36.0	29.5	32.2	32.6
G97.5	47.2	44.2	39.5	35.5	36.4	35.1	39.4	34.4	37.2	37.1
G98.0	49.0	46.0	40.7	38.7	39.9	39.3	42.9	40.1	42.1	41.7
G98.5	50.9	47.8	42.1	42.0	42.5	43.6	46.6	45.7	45.9	46.4
G99.0	52.8	49.5	43.4	43.8	43.9	45.6	50.3	48.3	48.0	49.0
G99.5	54.7	51.1	46.4	45.6	45.5	47.3	54.2	50.4	50.2	51.6
G100.0	56.7	52.8	49.6	47.6	48.0	49.2	58.0	52.7	53.5	54.4
G100.5	58.6	54.4	52.8	50.2	52.1	51.3	62.2	55.2	58.8	58.4
G101.0	60.5	56.1	56.1	53.8	56.2	55.1	66.3	60.1	64.2	63.9
G101.5	62.4	58.9	58.6	57.3	60.3	59.3	70.7	65.6	69.6	69.4
G102.0	64.4	62.1	60.5	60.8	63.1	63.6	75.1	71.1	73.2	75.0
G102.5	66.3	65.4	62.6	63.5	65.2	68.0	79.6	76.7	75.7	79.4
G103.0	68.4	68.7	64.6	65.5	67.4	72.4	84.1	82.3	78.5	82.5
G103.5	71.4	72.0	66.9	67.5	69.8	76.6	88.8	87.9	81.3	85.7
G104.0	74.9	74.7	70.5	69.6	72.5	78.5	93.5	91.1	84.8	89.1
G104.5	78.4	77.0	74.1	71.7	76.9	80.6	98.5	94.5	91.0	92.6
G105.0	82.1	79.3	77.8	75.5	81.2	82.8	103.5	98.0	97.3	98.5
G105.5	85.9	81.7	81.4	79.4	85.5	85.0	108.7	101.6	103.7	104.5
G106.0	89.7	84.2	85.2	83.3	89.7	87.4	113.9	105.4	110.1	110.6
G106.5	92.7	86.7	87.5	87.2	93.8	90.0	119.3	109.4	116.7	116.9
G107.0	95.5	90.5	89.8	91.3	97.1	92.6	124.7	113.4	122.0	123.3
G107.5	98.4	94.3	92.2	94.3	99.7	95.3	130.3	117.6	126.0	127.8
G108.0	101.4	98.1	94.7	96.8	102.3	98.2	135.9	121.9	130.2	131.7
G108.5	104.5	101.9	97.2	99.4	105.0	102.4	141.7	128.0	134.6	135.7
G109.0	107.6	105.7	100.1	102.1	107.8	106.8	147.5	134.4	139.1	139.7
G109.5	111.8	109.8	104.3	104.8	110.5	111.3	153.6	140.8	143.7	144.0
G110.0	117.1	112.6	108.6	107.6	113.3	116.0	159.6	147.3	148.5	148.4
G110.5	122.7	115.3	112.9	111.1	116.2	120.8	165.8	153.8	153.7	154.1

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 36)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G111.0	128.3	118.2	117.3	115.6	120.2	125.8	172.1	160.5	160.8	161.5
G111.5	134.3	121.2	121.6	120.2	124.5	131.0	178.6	167.3	168.0	169.1
G112.0	140.3	124.2	125.9	124.8	128.9	136.4	185.0	174.2	175.4	176.8
G112.5	146.5	127.3	129.2	129.5	133.6	142.0	191.8	181.2	182.9	184.6
G113.0	151.8	131.0	132.1	134.0	138.4	147.9	198.7	188.4	190.5	192.6
G113.5	156.1	136.5	135.0	138.6	143.6	154.0	205.7	195.6	198.3	200.7
G114.0	160.5	142.3	137.9	143.1	148.9	160.4	212.7	203.0	206.3	208.9
G114.5	165.0	148.8	141.0	146.6	154.3	166.8	219.8	210.4	214.5	215.3
G115.0	169.9	155.4	144.2	149.7	159.7	173.7	226.9	218.1	222.8	221.1
G115.5	174.9	162.3	147.3	152.8	165.0	180.8	234.6	226.0	231.2	227.2
G116.0	180.0	169.7	150.9	156.0	169.2	188.0	242.2	234.1	237.1	233.4
G116.5	185.5	177.3	156.4	159.2	173.5	194.9	250.2	241.8	243.1	239.7
G117.0	194.3	183.7	162.4	162.6	177.8	201.1	258.3	248.9	249.3	246.3
G117.5	203.8	189.1	169.1	165.9	182.4	207.3	266.5	256.1	255.6	253.0
G118.0	213.7	194.5	176.1	169.7	187.1	213.6	274.8	263.4	262.2	259.9
G118.5	224.0	200.4	184.0	173.4	192.0	219.9	283.4	270.9	268.8	267.0
G119.0	234.5	206.5	192.2	177.7	197.3	226.4	291.9	278.6	275.7	274.3
G119.5	245.3	212.7	200.9	184.4	202.6	232.9	300.7	286.3	282.7	283.6
G120.0	256.4	219.5	210.4	192.0	208.6	239.7	309.5	294.3	289.9	293.3
G120.5	267.6	226.4	220.0	200.2	214.6	246.6	318.8	302.5	297.2	303.1
G121.0	277.1	233.6	228.1	208.9	221.2	253.9	328.0	310.8	304.6	313.0
G121.5	284.3	244.2	235.5	218.5	227.9	261.3	337.5	319.2	312.2	323.1
G122.0	291.7	255.9	243.2	228.3	235.1	269.0	347.0	327.8	319.9	333.3
G122.5	299.2	267.8	251.5	239.1	242.4	276.8	356.5	336.4	327.6	343.6
G123.0	306.7	280.0	259.8	250.1	250.2	284.9	366.0	345.2	335.8	354.0
G123.5	314.4	292.2	268.8	261.8	259.8	293.0	375.8	354.0	345.8	364.5
G124.0	322.1	304.5	278.0	273.9	269.8	301.2	385.7	363.0	356.0	375.1
G124.5	329.9	316.9	287.5	286.5	280.1	309.6	395.8	372.2	366.1	385.8
G125.0	337.9	329.2	297.3	299.5	290.7	318.0	405.9	381.4	376.4	396.7
G125.5	345.9	341.4	307.3	312.3	301.6	326.6	416.1	390.7	386.8	407.1
G126.0	357.2	353.5	317.3	323.0	312.7	335.4	426.4	400.2	397.2	415.0
G126.5	368.9	363.6	329.1	333.6	324.1	344.3	436.7	409.7	407.6	423.0
G127.0	380.6	372.3	342.1	343.9	335.6	353.2	446.9	419.2	418.1	431.1
G127.5	392.5	381.1	355.1	354.2	347.2	362.3	457.0	428.8	428.7	439.3
G128.0	404.5	390.0	367.8	364.1	358.8	371.3	467.1	438.3	439.3	447.6
G128.5	416.8	399.0	380.2	374.1	370.4	380.4	477.5	447.9	449.9	455.9
G129.0	429.3	408.0	392.5	383.7	381.9	389.4	487.9	457.6	460.6	464.3

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 37)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G129.5	441.9	417.1	404.5	393.3	393.2	398.3	498.3	467.4	471.3	472.7
G130.0	454.9	426.4	416.5	402.6	404.5	407.2	508.7	477.2	482.0	481.1
G130.5	468.1	435.8	428.5	411.7	415.3	416.1	519.0	487.0	492.6	489.5
G131.0	480.7	445.3	440.4	420.7	426.0	425.1	529.4	496.9	503.3	498.0
G131.5	490.8	455.1	452.3	429.4	436.1	434.0	539.7	506.7	513.7	506.5
G132.0	500.9	465.1	464.4	438.1	446.1	442.7	549.9	516.5	524.1	515.0
G132.5	511.3	476.9	476.6	446.8	455.9	451.3	559.7	526.3	534.6	523.5
G133.0	521.9	489.8	489.2	455.4	465.7	459.5	569.5	536.0	545.0	532.1
G133.5	532.6	502.8	500.0	464.2	475.8	467.4	579.2	545.4	555.2	540.5
G134.0	543.6	516.1	509.6	473.0	486.0	475.3	588.9	554.9	565.5	548.9
G134.5	554.7	529.5	519.1	484.1	496.6	483.2	598.6	564.4	575.4	558.8
G135.0	565.9	543.0	528.8	495.3	506.2	491.7	608.3	574.0	584.2	568.7
G135.5	577.2	556.6	538.4	506.9	516.0	501.0	617.6	584.0	592.9	578.7
G136.0	588.7	570.2	548.0	518.6	525.9	510.7	626.8	593.8	601.6	588.6
G136.5	600.0	583.7	557.5	530.2	535.8	520.9	636.1	603.5	610.2	598.3
G137.0	611.5	596.9	566.7	541.6	545.8	531.2	645.3	613.1	618.7	607.9
G137.5	623.3	609.8	575.7	552.5	555.2	541.9	654.2	622.7	627.0	617.4
G138.0	634.4	622.4	584.4	562.7	564.2	552.3	663.1	632.1	635.2	626.7
G138.5	645.2	634.5	592.4	572.4	572.5	562.4	671.3	641.4	643.3	636.0
G139.0	654.9	645.8	600.2	581.2	580.0	571.6	679.6	650.4	651.5	645.2
G139.5	664.3	654.6	607.3	589.4	586.7	579.5	688.1	659.2	659.6	654.3
G140.0	673.0	660.0	614.0	596.8	592.5	586.4	696.6	668.0	667.7	663.2
G140.5	680.9	665.2	620.2	603.8	597.7	591.4	704.8	676.8	675.6	672.0
G141.0	688.5	669.6	626.1	610.0	602.0	595.6	713.0	685.5	683.4	680.5
G141.5	695.5	673.5	631.4	616.0	605.9	598.3	720.8	694.1	691.0	689.1
G142.0	702.2	676.9	636.5	621.3	609.1	600.4	728.5	702.4	698.6	697.4
G142.5	709.0	678.9	642.1	626.4	612.1	601.8	736.2	710.6	706.0	705.7
G143.0	715.8	680.8	646.4	630.2	614.7	602.9	743.8	718.6	713.5	713.7
G143.5	722.6	681.8	650.1	633.7	617.0	603.9	751.3	726.6	720.8	721.7
G144.0	728.5	682.3	651.4	634.7	618.8	604.6	758.8	734.6	728.0	729.3
G144.5	729.7	682.9	652.2	634.9	620.1	605.1	766.0	742.3	735.1	736.8
G145.0	731.2	683.5	651.9	633.1	620.0	604.8	773.2	749.9	742.0	744.2
G145.5	732.9	684.2	651.4	630.2	619.3	602.8	779.7	757.3	748.8	751.5
G146.0	734.8	686.0	652.2	628.5	616.0	599.6	786.3	764.4	755.3	758.2
G146.5	737.7	687.8	653.9	627.2	612.5	593.7	792.5	771.2	761.9	764.5
G147.0	740.7	690.6	657.0	627.8	607.7	587.6	798.7	778.0	768.2	770.7
G147.5	744.6	693.5	661.7	629.8	603.0	581.1	805.3	784.8	774.6	777.0

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 38)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G148.0	749.2	699.1	667.1	632.9	601.0	575.9	811.9	791.6	781.1	783.3
G148.5	754.3	706.2	674.4	637.5	599.0	574.6	818.4	798.4	787.5	789.4
G149.0	760.0	714.8	682.3	643.1	602.1	575.2	824.8	805.1	793.9	795.5
G149.5	766.3	725.4	693.6	650.6	605.1	580.6	830.7	811.6	800.2	801.2
G150.0	771.6	736.5	705.4	659.0	612.2	587.4	836.6	818.1	806.2	806.9
G150.5	777.0	747.5	719.5	670.5	619.3	598.2	842.1	824.2	812.3	812.5
G151.0	781.7	758.5	734.2	682.3	630.4	610.5	847.6	830.3	817.9	818.0
G151.5	784.9	766.3	746.5	696.9	641.5	627.5	853.0	836.1	823.6	823.4
G152.0	788.5	773.3	758.1	711.6	658.0	645.8	858.4	841.8	829.2	828.9
G152.5	790.3	778.1	766.2	725.5	674.8	668.1	863.8	847.6	834.7	834.0
G153.0	792.0	781.1	771.1	740.0	694.1	690.0	869.1	853.2	840.1	839.2
G153.5	792.6	783.3	774.2	749.1	714.8	710.1	873.9	858.6	845.8	844.1
G154.0	792.5	784.0	775.7	758.7	730.8	728.1	878.7	863.8	851.2	849.1
G154.5	791.8	784.2	776.8	763.1	745.6	739.1	883.5	868.9	856.6	854.0
G155.0	790.0	782.9	776.6	767.0	753.0	748.3	888.3	874.1	861.9	859.0
G155.5	787.9	781.3	776.3	768.1	758.6	751.5	893.2	879.2	867.2	863.8
G156.0	785.4	778.4	774.4	768.6	760.2	753.7	898.1	884.3	872.5	868.7
G156.5	782.7	775.0	772.5	767.6	760.7	752.8	902.3	889.1	877.9	873.3
G157.0	780.6	771.7	769.2	766.0	759.3	751.2	906.5	893.8	882.8	877.8
G157.5	779.1	768.5	765.6	763.1	757.0	747.4	910.6	898.2	887.6	882.2
G158.0	778.1	766.2	761.8	759.5	752.8	742.9	914.8	902.7	892.3	886.7
G158.5	779.3	764.9	757.5	754.9	747.6	736.3	918.9	907.1	897.0	891.0
G159.0	780.9	763.7	754.3	749.5	741.6	729.6	923.1	911.6	901.5	895.4
G159.5	784.2	764.9	751.3	744.5	735.1	723.0	926.4	915.5	906.0	899.6
G160.0	788.0	765.8	749.8	739.9	730.0	717.0	929.8	919.4	910.2	903.3
G160.5	792.5	768.6	749.6	736.4	725.8	714.1	933.0	923.0	914.1	907.1
G161.0	796.2	771.6	750.5	735.0	724.4	712.0	936.3	926.6	918.0	910.7
G161.5	799.8	775.5	753.5	735.0	724.9	714.5	939.8	930.3	921.9	914.6
G162.0	804.0	779.8	757.0	738.7	728.3	717.7	943.3	934.0	925.8	918.7
G162.5	808.2	784.6	762.2	743.3	733.7	724.9	946.3	937.4	929.5	922.7
G163.0	813.0	789.8	767.6	750.4	740.8	732.4	949.4	940.8	933.1	926.4
G163.5	818.2	795.3	773.9	757.9	749.1	741.8	952.1	943.9	936.5	930.0
G164.0	823.9	801.4	780.3	766.4	758.0	751.4	954.8	946.9	939.9	933.6
G164.5	830.3	807.6	787.4	775.0	767.6	761.8	957.9	950.2	943.3	937.2
G165.0	837.1	815.0	794.6	784.7	777.7	772.5	961.0	953.4	946.7	940.8
G165.5	845.4	822.6	802.9	794.5	788.6	784.4	963.6	956.4	950.0	944.4
G166.0	853.8	831.6	812.5	806.0	800.4	796.6	966.2	959.3	953.0	947.5

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 39)

Unit: cd

G\C	C150.0	C155.0	C160.0	C165.0	C170.0	C175.0	C180.0	C185.0	C190.0	C195.0
G166.5	863.6	841.1	824.5	817.7	813.4	810.9	968.2	961.7	955.8	950.5
G167.0	874.1	851.8	837.5	832.0	827.8	825.6	970.1	964.0	958.4	953.2
G167.5	885.1	863.8	852.1	846.7	843.9	843.2	971.9	966.1	960.7	955.9
G168.0	896.8	876.3	868.2	863.7	861.1	861.1	973.7	968.2	963.1	958.4
G168.5	908.7	891.1	884.9	881.3	879.8	880.9	975.4	970.2	965.3	960.8
G169.0	919.4	907.5	902.0	898.8	898.4	900.7	977.1	972.1	967.5	963.2
G169.5	930.9	921.9	918.3	916.5	916.3	918.8	978.8	974.1	969.6	965.5
G170.0	939.0	936.0	932.1	931.1	932.6	936.4	980.4	975.9	971.7	967.8
G170.5	947.8	945.3	944.9	944.2	945.2	948.2	981.9	977.7	973.6	970.0
G171.0	954.5	953.7	952.9	953.7	956.1	959.7	983.4	979.4	975.6	972.1
G171.5	959.2	959.5	960.6	961.0	962.7	965.5	984.7	981.0	977.5	974.1
G172.0	963.5	963.8	964.7	966.3	968.5	971.2	986.0	982.5	979.2	976.1
G172.5	966.4	967.5	968.8	970.1	972.0	974.3	987.2	984.0	980.8	978.0
G173.0	969.3	970.3	971.6	973.2	975.2	977.4	988.4	985.4	982.5	979.8
G173.5	971.6	972.8	974.2	975.7	977.4	979.4	989.5	986.7	984.1	981.6
G174.0	973.8	974.9	976.2	977.8	979.5	981.4	990.7	988.0	985.5	983.2
G174.5	975.8	976.9	978.1	979.5	981.0	982.8	991.4	989.0	986.7	984.6
G175.0	977.7	978.8	979.9	981.2	982.6	984.1	992.1	990.0	987.9	986.0
G175.5	979.7	980.6	981.6	982.8	984.0	985.4	992.5	990.7	988.8	987.1
G176.0	981.5	982.3	983.3	984.3	985.5	986.7	993.0	991.3	989.7	988.1
G176.5	983.3	984.0	984.9	985.8	986.7	987.8	993.2	991.8	990.4	989.0
G177.0	984.6	985.4	986.2	987.1	988.0	988.9	993.4	992.3	991.0	989.8
G177.5	986.0	986.6	987.3	988.0	988.7	989.5	993.2	992.2	991.2	990.3
G178.0	987.2	987.7	988.2	988.8	989.4	990.0	993.0	992.2	991.4	990.6
G178.5	988.3	988.7	989.1	989.6	990.0	990.5	992.6	992.1	991.5	990.9
G179.0	989.5	989.7	990.0	990.3	990.6	990.9	992.3	991.9	991.6	991.2
G179.5	990.6	990.7	990.9	991.0	991.2	991.3	991.4	991.2	990.9	990.7
G180.0	991.7	991.7	991.7	991.7	991.7	991.7	991.7	991.7	991.7	991.7

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 40)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G0.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0
G0.5	3996.7	3995.6	3995.3	3994.6	3993.8	3993.5	3993.1	3992.8	3992.8	3992.8
G1.0	3988.1	3986.6	3985.6	3984.1	3983.0	3982.3	3981.6	3980.9	3980.5	3980.5
G1.5	3980.9	3978.4	3976.2	3974.4	3972.6	3971.2	3970.1	3969.0	3968.6	3968.3
G2.0	3973.7	3970.4	3967.6	3965.0	3962.9	3960.7	3958.9	3957.8	3956.8	3956.0
G2.5	3966.5	3962.5	3958.9	3956.0	3953.2	3950.6	3948.5	3946.7	3945.2	3944.2
G3.0	3959.3	3954.6	3950.3	3946.3	3943.1	3940.2	3937.7	3935.5	3934.1	3932.6
G3.5	3950.6	3945.6	3940.9	3936.6	3932.6	3929.4	3926.5	3924.7	3922.9	3921.5
G4.0	3940.6	3934.8	3929.4	3925.1	3921.5	3917.9	3915.0	3912.8	3911.8	3910.0
G4.5	3930.1	3923.6	3917.9	3912.8	3908.9	3905.6	3903.1	3901.0	3899.5	3898.8
G5.0	3919.3	3912.1	3905.6	3900.2	3895.9	3892.7	3890.2	3888.7	3887.3	3886.9
G5.5	3908.2	3900.6	3893.8	3887.6	3883.0	3879.0	3876.5	3875.4	3874.7	3874.7
G6.0	3897.0	3888.4	3881.2	3875.0	3869.6	3865.7	3862.8	3861.7	3862.8	3863.5
G6.5	3885.1	3876.5	3868.6	3861.7	3856.7	3852.4	3849.1	3849.5	3850.9	3852.7
G7.0	3871.1	3862.1	3855.2	3848.4	3842.6	3838.7	3837.6	3838.0	3839.4	3841.9
G7.5	3856.7	3846.6	3839.0	3833.6	3828.6	3826.4	3826.1	3826.4	3828.2	3830.8
G8.0	3839.8	3830.4	3822.5	3816.7	3814.6	3814.2	3814.2	3814.9	3817.1	3819.6
G8.5	3823.2	3813.1	3805.2	3799.4	3799.8	3802.3	3802.3	3803.4	3805.6	3808.8
G9.0	3807.0	3796.2	3787.2	3783.2	3785.4	3788.3	3790.4	3791.5	3794.0	3797.6
G9.5	3791.2	3779.6	3770.3	3768.1	3771.0	3774.6	3778.2	3780.0	3782.5	3786.8
G10.0	3775.0	3763.4	3754.1	3753.7	3756.2	3761.3	3765.2	3768.5	3771.0	3775.7
G10.5	3758.4	3746.2	3740.0	3739.7	3741.8	3746.9	3752.3	3757.0	3759.5	3764.2
G11.0	3740.0	3728.5	3724.6	3725.6	3727.8	3732.8	3740.0	3744.7	3748.3	3753.0
G11.5	3721.0	3709.1	3709.4	3710.9	3713.8	3718.8	3726.4	3732.8	3736.8	3739.0
G12.0	3701.5	3690.7	3692.9	3696.1	3699.7	3704.8	3712.7	3721.3	3723.1	3724.9
G12.5	3682.1	3673.4	3676.3	3681.0	3685.3	3690.7	3699.4	3706.6	3708.7	3711.2
G13.0	3663.0	3656.2	3659.4	3664.8	3671.6	3677.0	3685.3	3689.6	3693.6	3697.2
G13.5	3643.6	3639.2	3642.5	3649.3	3656.5	3663.4	3667.7	3672.7	3678.5	3683.5
G14.0	3623.8	3622.3	3625.2	3632.4	3641.8	3650.4	3650.8	3655.4	3663.4	3669.5
G14.5	3602.2	3604.7	3608.3	3615.5	3626.6	3632.8	3633.8	3638.5	3646.8	3655.4
G15.0	3582.0	3585.7	3591.5	3598.9	3610.4	3614.0	3616.9	3621.6	3630.2	3640.3
G15.5	3560.5	3566.9	3573.6	3582.1	3592.6	3595.5	3599.7	3605.0	3613.3	3624.8
G16.0	3539.3	3546.4	3556.0	3565.3	3572.0	3575.4	3581.5	3588.3	3596.8	3609.4
G16.5	3519.4	3526.1	3537.4	3548.6	3551.4	3554.9	3562.5	3571.2	3580.3	3593.6
G17.0	3499.3	3506.1	3518.2	3532.4	3530.9	3534.4	3543.2	3554.0	3564.1	3581.5
G17.5	3479.2	3486.0	3498.9	3511.3	3510.3	3514.0	3523.4	3536.7	3550.4	3569.5
G18.0	3459.1	3466.2	3479.0	3488.4	3489.4	3493.8	3503.1	3518.0	3538.2	3557.5

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 41)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G18.5	3437.6	3446.6	3459.0	3465.3	3468.0	3473.6	3482.8	3502.3	3525.7	3545.6
G19.0	3415.9	3426.7	3440.0	3441.3	3444.9	3452.6	3462.6	3488.0	3513.1	3533.9
G19.5	3393.3	3406.3	3420.6	3417.6	3421.8	3431.2	3445.1	3473.9	3500.6	3522.2
G20.0	3370.2	3385.8	3397.4	3394.4	3398.6	3409.6	3430.3	3459.5	3488.3	3510.5
G20.5	3347.1	3363.7	3373.6	3371.4	3375.5	3386.6	3415.3	3445.1	3475.9	3498.9
G21.0	3323.7	3341.7	3349.3	3348.2	3352.7	3366.2	3399.5	3430.8	3462.9	3487.2
G21.5	3300.5	3319.1	3323.1	3323.7	3329.9	3348.8	3383.9	3416.6	3450.3	3475.5
G22.0	3277.5	3296.3	3296.7	3298.9	3306.9	3332.2	3368.6	3402.3	3438.0	3461.3
G22.5	3254.4	3273.8	3269.9	3273.0	3283.8	3315.5	3352.7	3387.9	3425.9	3438.5
G23.0	3230.9	3248.5	3243.1	3246.5	3262.8	3298.8	3336.8	3373.5	3407.4	3415.6
G23.5	3207.5	3221.9	3216.5	3219.9	3243.4	3282.0	3321.3	3359.3	3381.6	3392.6
G24.0	3182.2	3195.0	3190.0	3193.7	3224.0	3265.4	3305.6	3344.4	3355.7	3369.5
G24.5	3157.1	3167.6	3163.5	3167.5	3204.2	3248.8	3289.7	3318.6	3329.8	3345.9
G25.0	3131.6	3138.6	3135.6	3141.4	3184.6	3231.5	3273.7	3292.6	3303.9	3321.6
G25.5	3106.0	3109.4	3107.6	3120.6	3165.1	3214.6	3255.9	3265.8	3278.2	3297.1
G26.0	3081.1	3080.0	3078.6	3100.1	3145.6	3197.8	3228.7	3238.9	3252.6	3272.5
G26.5	3056.5	3050.7	3049.4	3078.2	3126.2	3179.7	3201.5	3211.9	3227.1	3247.7
G27.0	3031.7	3021.7	3020.5	3056.6	3107.2	3162.0	3174.3	3184.8	3201.6	3222.5
G27.5	3004.7	2992.6	2992.2	3034.8	3088.2	3137.6	3146.3	3157.7	3175.8	3196.1
G28.0	2974.5	2963.1	2964.1	3012.8	3069.3	3106.8	3117.9	3130.8	3150.0	3168.9
G28.5	2943.3	2932.7	2938.6	2990.8	3050.1	3076.3	3089.4	3104.1	3123.5	3141.9
G29.0	2912.1	2902.2	2915.6	2969.5	3031.5	3046.1	3060.1	3077.4	3096.3	3114.9
G29.5	2881.3	2871.4	2891.9	2948.2	3012.1	3016.3	3030.4	3050.4	3068.8	3088.2
G30.0	2850.6	2840.7	2867.8	2927.1	2979.9	2986.5	3000.6	3023.1	3041.5	3061.6
G30.5	2820.0	2810.3	2844.0	2906.3	2947.4	2956.8	2970.8	2995.7	3014.3	3035.1
G31.0	2789.2	2780.1	2820.3	2885.8	2915.3	2925.9	2941.5	2967.7	2987.3	3008.7
G31.5	2757.5	2749.3	2796.7	2864.2	2883.5	2894.9	2912.7	2939.7	2960.5	2982.3
G32.0	2725.7	2718.1	2773.5	2842.7	2851.9	2863.6	2884.5	2912.0	2933.7	2955.9
G32.5	2693.4	2688.0	2750.5	2818.6	2820.4	2832.1	2856.3	2884.6	2907.1	2929.8
G33.0	2661.1	2662.1	2727.4	2784.5	2788.8	2800.7	2828.4	2856.9	2880.5	2898.6
G33.5	2628.9	2636.3	2704.2	2750.7	2757.0	2769.9	2800.6	2829.2	2853.9	2867.4
G34.0	2596.9	2610.9	2681.3	2717.5	2724.0	2741.4	2772.7	2801.8	2824.3	2836.2
G34.5	2564.7	2585.6	2657.6	2684.6	2691.1	2713.1	2744.4	2774.6	2792.6	2804.8
G35.0	2532.1	2560.6	2634.0	2651.8	2658.2	2684.9	2716.5	2747.4	2760.8	2773.4
G35.5	2499.4	2535.8	2610.4	2618.6	2625.8	2656.1	2689.0	2715.9	2728.9	2741.6
G36.0	2466.5	2510.9	2586.7	2585.3	2593.9	2627.5	2661.2	2682.1	2696.7	2709.9
G36.5	2433.6	2485.8	2553.3	2551.8	2564.7	2599.2	2633.4	2648.5	2664.0	2678.3

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 42)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G37.0	2401.2	2460.7	2519.6	2517.9	2535.5	2570.7	2605.7	2615.1	2631.2	2646.7
G37.5	2369.1	2435.0	2485.8	2484.1	2506.6	2542.2	2570.9	2581.8	2598.3	2615.2
G38.0	2336.8	2409.4	2451.9	2450.8	2477.6	2513.9	2536.4	2548.5	2565.4	2587.2
G38.5	2309.6	2384.1	2417.6	2417.7	2448.5	2485.9	2502.0	2515.2	2532.3	2561.4
G39.0	2282.8	2358.9	2383.1	2384.9	2419.8	2458.0	2467.8	2481.7	2499.9	2535.6
G39.5	2255.6	2334.1	2347.9	2354.7	2391.2	2426.1	2433.6	2447.9	2473.5	2509.9
G40.0	2228.8	2310.0	2312.8	2325.4	2362.7	2390.8	2399.3	2414.1	2447.2	2484.2
G40.5	2202.4	2286.0	2278.2	2296.0	2334.5	2356.0	2364.9	2380.2	2421.0	2458.6
G41.0	2176.0	2256.0	2244.2	2266.1	2306.5	2321.3	2330.5	2353.2	2395.0	2433.0
G41.5	2150.3	2221.2	2210.5	2236.7	2278.7	2286.6	2295.9	2326.9	2369.1	2407.6
G42.0	2124.6	2185.7	2176.6	2207.6	2250.0	2251.8	2261.5	2300.7	2343.4	2382.3
G42.5	2098.8	2150.4	2142.6	2178.6	2214.6	2217.1	2228.3	2274.7	2317.9	2357.3
G43.0	2073.2	2115.8	2108.3	2149.9	2179.5	2182.4	2201.7	2248.8	2292.4	2330.4
G43.5	2047.4	2081.9	2078.2	2121.9	2144.4	2147.8	2175.6	2223.1	2267.1	2300.4
G44.0	2021.5	2048.1	2048.5	2094.0	2109.3	2113.3	2149.6	2197.6	2241.9	2269.9
G44.5	1995.9	2013.9	2020.0	2066.3	2074.1	2079.0	2123.8	2172.3	2211.9	2239.0
G45.0	1970.5	1979.6	1991.8	2039.2	2039.0	2049.2	2098.2	2147.1	2180.8	2208.1
G45.5	1945.4	1945.3	1963.6	2007.1	2003.9	2023.0	2072.6	2122.0	2149.7	2177.3
G46.0	1920.9	1911.1	1935.8	1972.0	1968.8	1997.1	2047.3	2092.6	2118.5	2146.4
G46.5	1896.4	1877.2	1908.3	1936.6	1934.1	1971.4	2022.3	2060.7	2087.2	2115.5
G47.0	1868.1	1843.9	1880.7	1901.4	1899.6	1945.9	1997.5	2028.8	2056.0	2084.7
G47.5	1834.6	1810.8	1853.3	1866.3	1866.2	1920.5	1972.4	1997.0	2024.9	2054.1
G48.0	1800.8	1779.8	1826.3	1831.4	1840.5	1895.3	1941.9	1965.1	1993.9	2024.6
G48.5	1767.2	1752.0	1799.4	1796.8	1815.1	1870.4	1909.9	1933.5	1963.0	1996.8
G49.0	1733.7	1724.4	1772.8	1762.5	1789.7	1845.5	1878.3	1902.2	1932.3	1969.1
G49.5	1700.6	1696.9	1739.9	1728.3	1764.6	1820.9	1846.8	1871.1	1904.1	1941.4
G50.0	1667.7	1669.8	1705.5	1694.3	1739.7	1794.6	1815.6	1840.3	1876.7	1913.8
G50.5	1635.0	1643.0	1671.2	1660.5	1715.0	1762.7	1784.6	1809.6	1849.4	1886.1
G51.0	1602.3	1616.5	1637.4	1632.4	1690.7	1731.1	1753.7	1781.3	1822.2	1858.7
G51.5	1569.5	1590.3	1603.7	1607.5	1666.6	1699.7	1722.6	1754.4	1795.0	1831.3
G52.0	1536.7	1564.5	1570.2	1583.1	1642.8	1668.6	1691.6	1727.6	1767.9	1804.1
G52.5	1504.2	1538.9	1536.8	1559.0	1619.4	1637.6	1660.6	1700.9	1741.0	1777.0
G53.0	1472.1	1513.7	1503.7	1535.1	1588.8	1606.5	1633.5	1674.1	1714.3	1747.6
G53.5	1440.4	1488.7	1470.7	1511.6	1557.5	1575.6	1607.0	1647.6	1687.8	1716.0
G54.0	1412.0	1460.6	1437.9	1488.5	1526.2	1544.7	1580.6	1621.4	1661.5	1684.4
G54.5	1386.4	1427.4	1405.8	1465.6	1495.0	1514.0	1554.4	1595.4	1629.8	1652.7
G55.0	1360.9	1394.5	1382.3	1442.9	1463.9	1486.0	1528.5	1569.6	1597.8	1621.1

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 43)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G55.5	1335.6	1361.6	1359.0	1420.4	1433.2	1460.3	1502.7	1543.6	1565.8	1589.4
G56.0	1310.7	1329.0	1336.0	1392.2	1402.9	1434.7	1477.2	1511.7	1533.9	1557.8
G56.5	1286.1	1296.7	1313.3	1361.6	1372.9	1409.5	1451.8	1480.0	1502.1	1526.3
G57.0	1261.7	1264.9	1290.9	1331.4	1343.2	1384.6	1426.6	1448.4	1470.3	1494.8
G57.5	1238.0	1233.4	1268.7	1301.4	1316.0	1359.8	1398.6	1417.1	1438.6	1463.2
G58.0	1214.3	1202.1	1246.9	1271.6	1291.6	1335.2	1367.3	1386.0	1407.2	1435.3
G58.5	1191.2	1171.0	1225.5	1241.9	1267.4	1310.8	1336.4	1355.2	1375.9	1408.4
G59.0	1168.5	1142.1	1204.5	1212.5	1243.3	1286.6	1305.6	1324.4	1347.2	1381.6
G59.5	1143.6	1120.2	1178.5	1183.2	1219.3	1260.3	1275.0	1293.8	1321.2	1354.8
G60.0	1112.7	1098.6	1149.1	1154.1	1195.6	1229.7	1244.4	1263.3	1295.2	1328.1
G60.5	1081.8	1077.5	1119.8	1128.7	1172.3	1199.2	1214.1	1236.4	1269.3	1301.5
G61.0	1051.1	1056.7	1090.8	1105.2	1149.2	1168.5	1183.5	1211.0	1243.5	1275.0
G61.5	1020.6	1036.3	1062.1	1082.2	1126.1	1137.9	1153.1	1185.7	1217.7	1248.6
G62.0	990.3	1016.1	1033.7	1059.5	1098.3	1107.5	1125.1	1160.7	1192.1	1222.2
G62.5	960.4	996.2	1005.7	1037.1	1068.4	1077.2	1100.7	1135.8	1166.7	1195.0
G63.0	930.7	976.7	977.9	1014.8	1038.6	1047.1	1076.6	1111.2	1141.3	1165.2
G63.5	901.2	953.2	951.2	992.8	1009.1	1017.5	1052.7	1086.8	1115.6	1135.5
G64.0	872.5	925.3	929.3	971.2	979.7	992.4	1028.9	1062.5	1086.3	1106.0
G64.5	852.9	897.6	907.5	946.8	950.6	969.5	1005.2	1038.2	1057.2	1076.4
G65.0	834.0	870.2	886.2	917.9	921.6	946.7	981.7	1011.0	1028.1	1047.0
G65.5	815.3	842.9	865.2	889.2	892.9	924.0	958.3	982.2	999.0	1017.6
G66.0	797.0	815.9	844.4	860.5	867.3	901.6	935.1	953.6	969.9	988.3
G66.5	779.3	788.9	824.0	832.1	845.5	879.3	908.5	925.0	940.9	959.1
G67.0	761.9	762.1	803.8	803.8	823.9	857.2	880.6	896.6	912.0	929.9
G67.5	744.8	740.8	779.6	775.8	802.5	835.3	852.9	868.2	883.0	906.1
G68.0	724.8	721.2	751.6	748.1	781.4	811.4	825.4	840.1	854.1	883.4
G68.5	698.7	701.9	724.0	726.0	760.5	784.4	798.0	812.1	832.2	860.7
G69.0	672.6	682.8	696.6	705.8	739.7	757.6	770.8	784.2	810.5	838.2
G69.5	646.7	664.2	669.6	685.8	719.2	730.9	743.7	762.0	788.8	815.7
G70.0	621.0	645.9	642.9	666.1	694.7	704.3	716.5	741.3	767.3	793.3
G70.5	595.5	627.4	616.4	646.6	668.7	677.8	691.6	720.6	746.0	771.0
G71.0	570.3	601.0	594.6	627.3	642.9	651.5	671.7	700.1	724.6	748.8
G71.5	550.8	575.0	575.9	608.2	617.1	625.2	652.0	679.5	703.3	726.6
G72.0	533.2	549.1	557.6	585.4	591.6	602.9	632.4	659.1	682.0	705.2
G72.5	516.0	523.4	539.5	560.5	566.2	584.3	613.0	638.8	660.7	684.4
G73.0	499.2	497.9	521.8	535.8	541.0	565.8	593.7	618.6	640.3	663.7
G73.5	482.8	472.5	504.3	511.2	518.7	547.5	574.5	598.5	620.0	643.0

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 44)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G74.0	466.5	455.2	485.6	486.8	501.2	529.2	555.4	578.7	599.7	622.3
G74.5	440.7	438.4	461.8	462.5	483.9	511.1	536.3	558.9	579.5	601.6
G75.0	415.2	422.0	438.2	438.3	466.8	493.1	517.0	539.2	559.4	580.8
G75.5	389.9	405.9	414.7	421.7	449.9	475.2	497.7	519.6	539.3	560.1
G76.0	364.9	390.0	391.4	405.8	433.2	456.8	478.5	500.0	519.3	539.5
G76.5	340.1	371.2	368.2	390.0	416.5	438.5	459.4	480.4	499.4	519.4
G77.0	324.6	348.3	347.3	374.4	399.5	420.2	440.4	460.9	479.8	500.7
G77.5	310.0	325.5	332.7	359.0	381.7	402.0	421.4	441.3	461.8	481.9
G78.0	295.7	302.9	318.4	343.8	364.1	383.8	402.5	423.6	443.9	463.3
G78.5	281.7	280.5	304.2	327.6	346.5	365.8	384.2	406.5	426.1	444.7
G79.0	265.3	260.9	290.3	310.9	329.1	347.7	368.1	389.5	408.2	426.1
G79.5	243.4	248.0	276.5	294.3	311.8	331.0	352.1	372.5	390.4	407.5
G80.0	221.8	235.4	261.4	277.9	294.6	315.9	336.1	355.6	372.6	389.0
G80.5	200.4	223.0	245.7	261.5	279.1	300.8	320.1	338.7	354.9	370.5
G81.0	180.5	210.8	230.1	245.3	265.2	285.9	304.2	321.9	337.1	351.8
G81.5	169.7	197.4	214.7	230.8	251.3	271.0	288.4	305.2	319.0	332.1
G82.0	159.2	182.8	199.3	218.0	237.5	256.1	272.6	287.7	300.0	312.4
G82.5	148.9	168.3	185.1	205.4	223.8	241.3	256.2	269.4	281.1	292.7
G83.0	138.3	154.0	173.7	192.8	210.2	226.2	238.7	251.2	262.2	273.0
G83.5	125.3	139.9	162.4	180.3	196.6	209.6	221.3	232.9	243.3	253.4
G84.0	112.5	129.9	151.2	167.9	181.1	193.2	204.0	214.7	224.5	233.7
G84.5	99.9	120.3	140.2	154.4	165.6	176.7	186.7	196.5	205.6	214.1
G85.0	89.7	110.9	129.0	139.9	150.2	160.3	169.4	178.4	186.8	194.5
G85.5	82.2	101.6	115.7	125.5	134.8	143.9	152.2	160.2	168.0	174.9
G86.0	74.8	90.9	102.4	111.2	119.4	127.6	134.9	142.3	149.6	156.0
G86.5	67.6	79.0	89.1	96.9	104.1	111.3	118.3	125.0	131.5	137.1
G87.0	57.6	67.1	75.9	82.7	89.3	96.0	102.0	107.8	113.3	118.1
G87.5	47.5	55.3	62.8	69.3	75.0	80.7	85.7	90.5	95.2	99.2
G88.0	37.4	43.9	51.0	56.2	60.8	65.4	69.4	73.3	77.1	80.4
G88.5	28.1	33.7	39.3	43.2	46.6	50.1	53.2	56.1	59.0	61.5
G89.0	19.8	23.6	27.5	30.1	32.5	34.8	36.9	38.9	40.9	42.6
G89.5	11.5	13.4	15.8	17.1	18.3	19.6	20.6	21.7	22.8	23.7
G90.0	3.6	3.6	4.5	4.5	4.6	4.8	4.9	5.0	5.2	5.3
G90.5	8.2	8.7	10.5	10.8	11.2	11.6	11.9	12.3	12.8	13.1
G91.0	10.2	11.0	13.1	13.7	14.3	15.0	15.5	16.0	16.6	17.0
G91.5	12.1	13.4	15.7	16.6	17.5	18.3	19.0	19.7	20.4	20.9
G92.0	14.3	15.8	18.3	19.5	20.6	21.7	22.5	23.4	24.2	24.8

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 45)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G92.5	16.7	18.4	21.0	22.4	23.8	25.1	26.1	27.0	28.0	28.7
G93.0	19.0	21.2	23.9	25.4	26.9	28.4	29.6	30.7	31.8	32.6
G93.5	21.3	23.9	26.8	28.6	30.2	31.8	33.1	34.4	35.6	36.5
G94.0	23.0	26.7	29.8	31.8	33.7	35.3	36.7	38.1	39.4	40.4
G94.5	24.8	29.2	32.8	35.0	37.1	38.9	40.5	41.9	43.3	44.3
G95.0	26.6	31.4	35.7	38.2	40.5	42.5	44.2	45.8	47.2	48.3
G95.5	28.9	33.6	38.2	41.5	44.0	46.1	47.9	49.6	51.2	52.3
G96.0	31.8	35.8	40.7	44.5	47.4	49.7	51.7	53.5	55.1	56.3
G96.5	34.7	38.1	43.2	47.2	50.9	53.3	55.4	57.4	59.0	60.4
G97.0	37.7	41.3	45.7	50.0	53.9	56.9	59.2	61.2	63.0	64.4
G97.5	40.2	44.6	48.3	52.8	56.9	60.2	63.0	65.1	66.9	68.4
G98.0	42.7	47.9	51.4	55.7	60.0	63.5	66.5	69.0	70.9	72.4
G98.5	45.1	51.2	54.8	58.5	63.1	66.8	69.9	72.7	74.8	76.4
G99.0	47.7	54.4	58.3	61.8	66.1	70.0	73.4	76.3	78.6	80.4
G99.5	52.3	57.2	61.7	65.4	69.3	73.3	76.8	79.9	82.4	84.3
G100.0	57.4	60.2	65.2	69.1	72.7	76.6	80.3	83.5	86.1	88.1
G100.5	62.5	63.2	68.6	72.8	76.5	79.9	83.8	87.1	89.9	92.0
G101.0	67.7	66.2	71.9	76.5	80.3	83.6	87.3	90.8	93.6	95.8
G101.5	71.6	70.8	75.3	80.2	84.1	87.5	90.8	94.4	97.4	99.7
G102.0	74.9	76.2	78.7	83.9	88.0	91.4	94.7	98.1	101.1	103.5
G102.5	78.3	81.5	82.2	87.7	91.9	95.4	98.7	101.8	104.9	107.4
G103.0	81.8	86.9	85.7	91.5	95.8	99.3	102.7	105.9	108.7	111.2
G103.5	85.5	92.4	90.8	95.3	99.8	103.3	106.8	110.0	112.7	115.1
G104.0	91.4	97.0	96.6	99.2	104.0	107.2	110.8	114.1	116.8	119.1
G104.5	97.5	100.8	102.4	103.2	108.2	111.3	114.8	118.2	120.9	123.3
G105.0	103.5	104.8	108.3	107.3	112.5	115.9	118.9	122.3	125.1	127.4
G105.5	109.6	108.8	114.3	113.5	116.8	120.5	123.0	126.4	129.2	131.6
G106.0	115.8	112.9	120.4	119.7	121.2	125.1	127.8	130.5	133.3	135.8
G106.5	119.7	117.2	125.1	126.0	125.6	129.8	132.7	134.7	137.5	139.9
G107.0	123.7	123.5	129.6	132.4	131.4	134.5	137.7	139.7	141.6	144.1
G107.5	127.7	129.9	134.2	138.8	138.1	139.2	142.7	144.9	145.8	148.3
G108.0	131.9	136.4	138.9	145.3	144.8	143.9	147.7	150.2	151.4	152.5
G108.5	136.1	142.9	143.6	151.3	151.6	149.9	152.8	155.5	156.9	157.4
G109.0	141.0	149.6	148.5	156.4	158.4	157.0	157.9	160.8	162.4	163.1
G109.5	147.7	156.3	154.2	161.5	165.2	164.2	163.0	166.2	168.0	168.9
G110.0	154.5	161.0	161.2	166.7	172.2	171.4	169.7	171.5	173.6	174.6
G110.5	161.5	165.7	168.2	172.0	178.8	178.7	177.3	176.9	179.2	180.4

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 46)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G111.0	168.6	170.4	175.3	177.4	184.4	186.0	184.9	182.8	184.8	186.2
G111.5	175.9	175.3	182.4	182.8	190.1	193.4	192.5	190.7	190.4	192.0
G112.0	183.3	180.3	189.7	188.8	195.9	200.8	200.2	198.6	196.1	197.8
G112.5	189.1	185.4	197.0	196.3	201.7	207.5	207.9	206.5	204.2	203.6
G113.0	194.1	191.0	203.4	203.8	207.7	213.7	215.6	214.5	212.3	209.9
G113.5	199.3	199.0	208.7	211.5	213.7	220.0	223.4	222.5	220.5	218.2
G114.0	204.6	207.0	214.1	219.3	219.7	226.3	230.9	230.5	228.7	226.5
G114.5	210.1	215.2	219.6	227.1	226.8	232.7	237.5	238.5	236.9	234.8
G115.0	215.8	223.5	225.2	234.9	234.8	239.2	244.3	246.6	245.1	243.2
G115.5	221.6	231.9	230.9	242.8	242.8	245.7	251.1	254.3	253.3	251.5
G116.0	227.6	240.4	236.7	249.4	250.9	252.3	257.9	261.4	261.5	259.9
G116.5	236.3	248.9	242.6	255.4	259.0	259.5	264.8	268.5	269.7	268.3
G117.0	245.4	256.2	251.0	261.4	267.2	267.8	271.7	275.7	277.3	276.7
G117.5	254.7	262.5	259.9	267.5	275.4	276.2	278.7	282.9	284.7	285.2
G118.0	264.2	268.8	268.8	273.7	283.7	284.6	285.7	290.1	292.2	293.0
G118.5	273.8	275.3	278.0	280.0	291.4	293.0	293.6	297.4	299.7	300.8
G119.0	283.5	282.0	287.3	286.4	297.9	301.5	302.2	304.7	307.3	308.5
G119.5	293.3	288.8	296.6	292.8	304.4	310.0	310.7	312.1	314.8	316.3
G120.0	303.2	295.7	306.1	300.3	311.0	318.6	319.3	319.9	322.4	324.1
G120.5	313.3	302.8	315.6	309.7	317.7	327.1	327.9	328.6	330.0	331.9
G121.0	321.5	310.0	324.1	319.2	324.5	334.7	336.6	337.3	337.6	339.8
G121.5	329.1	319.5	331.1	328.9	331.4	341.6	345.3	346.0	345.8	347.6
G122.0	336.8	329.8	338.3	338.5	338.3	348.6	354.0	354.8	354.6	355.6
G122.5	344.7	340.1	345.6	348.2	345.3	355.6	362.8	363.6	363.3	363.6
G123.0	352.6	350.6	353.0	358.0	353.7	362.7	370.8	372.4	372.1	372.4
G123.5	360.8	361.2	360.6	367.8	363.5	369.9	378.1	381.2	380.8	381.2
G124.0	369.1	372.0	368.2	377.7	373.3	377.2	385.4	390.0	389.7	390.0
G124.5	377.5	382.7	376.0	386.9	383.2	384.5	392.8	398.8	398.5	398.8
G125.0	386.1	393.5	384.0	394.5	393.1	391.9	400.2	406.3	407.3	407.6
G125.5	394.8	404.4	392.0	402.1	402.9	400.3	407.7	413.8	416.2	416.3
G126.0	403.6	415.3	402.5	409.8	412.7	409.9	415.2	421.4	425.1	425.1
G126.5	413.3	424.8	413.2	417.7	422.5	419.5	422.8	429.0	432.8	433.9
G127.0	424.2	433.2	423.9	425.6	432.3	429.1	430.5	436.6	440.5	442.6
G127.5	435.2	441.8	434.7	433.5	442.0	438.7	438.3	444.3	448.3	450.9
G128.0	446.1	450.4	445.5	441.5	449.7	448.3	447.6	452.0	456.1	458.8
G128.5	456.9	459.2	456.3	449.6	457.5	457.8	456.8	459.8	463.9	466.7
G129.0	467.8	467.9	467.3	457.8	465.3	467.4	466.1	467.5	471.8	474.7

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 47)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G129.5	478.9	476.7	478.2	466.9	473.1	477.0	475.4	475.7	479.7	482.6
G130.0	489.9	485.6	489.0	477.6	481.0	486.5	484.7	484.6	487.6	490.6
G130.5	500.9	494.5	499.9	488.3	488.9	494.7	494.0	493.4	495.5	498.5
G131.0	511.9	503.5	510.3	498.9	496.9	502.4	503.3	502.2	503.6	506.5
G131.5	522.7	512.6	518.8	509.4	504.9	510.1	512.5	511.0	512.2	514.6
G132.0	533.4	521.8	527.4	519.9	512.9	517.7	521.7	519.8	520.8	522.6
G132.5	544.1	531.9	536.1	530.4	520.9	525.4	530.4	528.6	529.4	530.7
G133.0	554.8	542.4	544.8	540.8	530.7	533.1	537.9	537.4	538.0	538.8
G133.5	563.8	552.8	553.5	551.2	540.8	540.9	545.4	546.3	546.6	546.9
G134.0	571.5	563.1	562.2	561.7	550.8	548.7	552.9	555.1	555.2	555.0
G134.5	579.2	573.4	571.0	571.9	560.8	556.5	560.4	563.3	563.7	563.1
G135.0	586.7	583.6	579.8	581.4	570.8	564.3	567.9	570.6	572.0	571.2
G135.5	594.2	593.8	588.5	589.6	580.7	573.0	575.4	578.0	580.4	579.3
G136.0	601.7	604.1	597.3	597.7	590.6	582.8	583.0	585.3	588.5	587.4
G136.5	609.1	614.0	606.0	605.9	600.4	592.5	590.5	592.6	595.6	595.5
G137.0	616.6	623.9	614.8	614.2	610.2	602.2	598.2	600.0	602.8	603.5
G137.5	624.0	633.7	624.2	622.4	620.0	611.7	605.6	607.4	609.9	611.0
G138.0	631.5	643.3	633.5	630.7	629.9	621.2	614.4	614.7	617.0	618.0
G138.5	638.8	652.9	642.8	638.9	638.2	630.6	623.4	622.1	624.2	625.0
G139.0	646.1	662.4	651.8	647.2	646.3	639.9	632.4	629.5	631.4	632.1
G139.5	653.2	670.4	660.7	655.6	654.3	649.3	641.4	637.0	638.6	639.2
G140.0	660.3	676.6	669.6	663.8	662.3	658.6	650.3	645.8	645.8	646.2
G140.5	667.3	682.8	678.5	671.9	670.3	667.7	659.3	654.5	653.0	653.2
G141.0	674.3	689.0	687.4	680.0	678.3	676.0	668.3	663.3	660.2	660.3
G141.5	681.2	695.1	696.0	688.5	686.2	683.6	677.2	672.1	668.4	667.4
G142.0	688.3	701.3	704.5	697.0	694.1	691.1	686.1	680.7	676.7	674.6
G142.5	696.5	707.4	713.0	705.6	702.0	698.6	695.0	689.4	684.9	682.0
G143.0	704.4	713.5	721.5	714.1	709.9	706.1	703.8	698.0	693.0	689.9
G143.5	712.2	719.3	729.9	722.4	717.7	713.7	711.2	706.5	701.3	697.9
G144.0	719.8	725.2	738.3	730.6	725.6	721.2	718.6	714.9	709.4	705.8
G144.5	727.4	731.1	744.0	738.6	733.4	728.7	726.0	723.3	717.5	713.7
G145.0	734.8	737.0	749.5	746.6	741.0	736.2	733.5	731.3	725.7	721.6
G145.5	742.2	742.8	754.8	754.5	748.4	743.8	740.9	738.5	733.8	729.5
G146.0	749.6	748.7	760.1	762.2	755.7	751.4	748.3	745.6	742.0	737.4
G146.5	756.8	754.7	765.3	769.9	762.9	758.9	755.7	752.8	749.7	745.2
G147.0	764.0	760.5	770.5	777.3	770.1	766.2	763.1	760.0	756.7	753.1
G147.5	771.2	766.5	775.6	784.7	777.4	773.3	770.5	767.1	763.7	760.9

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 48)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G148.0	778.2	773.0	780.6	789.6	784.6	780.4	777.9	774.2	770.7	767.9
G148.5	785.1	779.6	785.7	794.0	791.8	787.4	785.3	781.3	777.8	774.9
G149.0	791.8	786.2	790.6	798.5	799.0	794.4	792.3	788.5	784.9	781.9
G149.5	798.2	792.6	795.6	802.9	806.1	801.3	798.9	795.7	791.9	788.9
G150.0	804.7	799.0	800.3	807.4	813.1	808.3	805.4	802.7	798.9	795.9
G150.5	811.0	805.2	805.0	811.9	819.9	815.1	811.8	809.5	806.0	802.9
G151.0	817.3	811.3	809.6	816.4	824.0	821.9	818.2	815.6	813.1	809.8
G151.5	823.1	817.1	814.3	820.9	828.1	828.5	824.4	821.7	820.1	816.8
G152.0	828.9	822.9	819.3	825.2	832.2	835.0	830.6	827.8	826.3	823.8
G152.5	834.6	828.7	825.1	829.5	836.2	841.5	836.7	833.8	832.1	830.9
G153.0	839.7	834.4	830.9	833.8	840.2	846.4	842.8	839.9	837.7	837.3
G153.5	844.7	840.1	836.4	838.1	844.2	849.8	848.9	845.8	843.5	842.7
G154.0	849.6	845.6	841.9	842.3	848.0	853.3	855.0	851.6	849.2	848.0
G154.5	854.4	851.1	847.3	846.5	851.8	856.6	861.1	857.3	854.9	853.2
G155.0	859.0	856.3	852.6	850.9	855.5	860.0	864.7	863.1	860.6	858.5
G155.5	863.7	861.6	857.9	856.1	859.2	863.3	867.8	868.8	866.2	863.7
G156.0	868.1	866.9	863.0	860.9	862.9	866.7	871.0	874.5	871.7	868.9
G156.5	872.5	872.1	868.0	865.8	866.5	870.1	874.0	877.6	877.0	874.3
G157.0	877.0	877.1	872.9	870.4	870.1	873.4	877.0	880.5	882.4	879.6
G157.5	881.5	881.5	877.5	875.0	873.9	876.6	880.1	883.3	886.0	884.9
G158.0	885.7	885.5	882.2	879.5	878.1	879.9	883.2	886.2	888.5	890.3
G158.5	889.9	889.3	886.7	883.9	882.3	883.3	886.2	889.1	891.0	893.5
G159.0	893.9	893.1	891.2	888.3	886.5	886.5	889.2	891.8	893.6	896.0
G159.5	897.7	896.8	895.4	892.4	890.7	890.2	892.2	894.5	896.1	898.4
G160.0	901.4	900.6	899.6	896.6	894.9	894.2	895.1	897.2	898.6	900.9
G160.5	905.1	904.2	903.7	900.7	899.0	898.0	898.0	900.0	901.2	903.4
G161.0	908.8	907.7	907.1	904.8	902.9	901.7	901.3	902.6	903.8	905.8
G161.5	912.5	911.2	910.6	908.9	906.9	905.4	904.8	905.2	906.3	908.3
G162.0	916.1	914.6	914.0	912.8	910.5	909.0	908.3	907.9	908.8	910.7
G162.5	919.5	918.0	917.4	916.6	914.1	912.5	911.6	911.0	911.4	913.1
G163.0	922.9	921.4	920.6	920.2	917.7	916.0	914.9	914.1	914.2	915.5
G163.5	926.2	924.7	923.8	923.1	921.1	919.3	918.0	917.2	917.3	917.9
G164.0	929.5	928.0	926.9	926.0	924.6	922.5	921.1	920.3	920.4	920.7
G164.5	932.9	931.4	929.9	928.8	927.8	925.7	924.2	923.4	923.4	923.5
G165.0	936.3	934.4	932.9	931.6	930.5	928.7	927.3	926.5	926.3	926.2
G165.5	939.5	937.5	935.7	934.3	933.1	931.8	930.4	929.6	929.2	929.0
G166.0	942.8	940.3	938.4	936.9	935.7	934.8	933.5	932.7	932.1	931.7

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 49)

Unit: cd

G\C	C200.0	C205.0	C210.0	C215.0	C220.0	C225.0	C230.0	C235.0	C240.0	C245.0
G166.5	945.8	943.0	941.1	939.5	938.1	937.4	936.5	935.5	934.8	934.3
G167.0	948.7	945.6	943.7	942.0	940.7	940.0	939.5	938.4	937.5	936.9
G167.5	951.4	948.2	946.2	944.5	943.3	942.5	942.0	941.2	940.2	939.5
G168.0	954.2	950.7	948.7	947.0	945.8	945.0	944.4	943.7	942.9	942.0
G168.5	956.8	953.2	951.1	949.5	948.4	947.5	946.7	946.0	945.4	944.4
G169.0	959.3	955.9	953.5	952.1	950.8	949.8	949.1	948.3	947.6	946.9
G169.5	961.8	958.4	955.9	954.5	953.3	952.2	951.4	950.6	949.9	949.0
G170.0	964.2	961.0	958.4	956.9	955.7	954.6	953.6	952.8	952.1	951.2
G170.5	966.6	963.5	961.0	959.3	957.9	956.8	955.9	955.1	954.3	953.4
G171.0	968.9	966.0	963.5	961.5	960.3	959.1	958.1	957.3	956.4	955.5
G171.5	971.2	968.4	966.0	963.9	962.5	961.4	960.4	959.5	958.6	957.7
G172.0	973.2	970.7	968.4	966.3	964.7	963.6	962.6	961.7	960.8	959.9
G172.5	975.3	972.9	970.7	968.7	967.1	965.8	964.9	963.8	962.9	962.0
G173.0	977.3	975.0	973.0	971.1	969.4	968.0	966.9	966.0	965.0	964.2
G173.5	979.2	977.1	975.1	973.3	971.8	970.3	969.1	968.0	967.1	966.3
G174.0	981.0	979.0	977.1	975.4	973.9	972.5	971.3	970.1	969.3	968.5
G174.5	982.6	980.8	979.0	977.3	975.9	974.6	973.4	972.3	971.4	970.6
G175.0	984.1	982.3	980.7	979.2	977.9	976.6	975.4	974.4	973.5	972.7
G175.5	985.4	983.9	982.4	980.9	979.7	978.5	977.4	976.4	975.5	974.8
G176.0	986.7	985.2	983.8	982.6	981.4	980.3	979.2	978.3	977.5	976.8
G176.5	987.7	986.4	985.3	984.1	983.0	981.9	981.0	980.2	979.4	978.7
G177.0	988.6	987.5	986.4	985.3	984.4	983.5	982.7	981.9	981.2	980.6
G177.5	989.3	988.3	987.4	986.6	985.8	985.0	984.2	983.6	983.0	982.5
G178.0	989.8	989.1	988.4	987.7	987.0	986.4	985.8	985.3	984.8	984.2
G178.5	990.3	989.8	989.2	988.7	988.2	987.8	987.3	986.7	986.3	985.8
G179.0	990.7	990.3	989.9	989.5	989.1	988.7	988.4	988.0	987.7	987.4
G179.5	990.6	990.4	990.2	990.0	989.8	989.6	989.4	989.2	989.1	988.9
G180.0	991.7	991.7	991.7	991.7	991.7	991.7	991.7	991.7	991.7	991.7

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 50)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G0.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0
G0.5	3992.8	3992.8	3992.8	3993.1	3993.5	3993.5	3993.8	3994.2	3994.6	3994.9
G1.0	3980.5	3980.5	3980.9	3981.2	3982.0	3982.3	3983.0	3983.8	3984.5	3985.6
G1.5	3968.3	3968.3	3969.0	3969.7	3970.8	3971.2	3972.2	3973.3	3974.8	3976.2
G2.0	3956.0	3956.4	3957.1	3957.8	3959.3	3960.4	3961.4	3963.2	3965.0	3967.2
G2.5	3944.2	3944.5	3945.2	3946.3	3947.8	3949.2	3951.0	3953.2	3955.7	3957.8
G3.0	3932.3	3932.3	3933.4	3934.4	3936.6	3938.4	3940.6	3943.4	3946.3	3947.8
G3.5	3920.4	3920.4	3921.5	3922.9	3925.1	3927.6	3930.5	3934.1	3936.2	3938.0
G4.0	3909.2	3908.9	3909.6	3911.4	3913.6	3916.8	3920.4	3924.4	3926.2	3928.3
G4.5	3897.7	3897.4	3898.1	3899.9	3902.4	3906.0	3910.3	3913.9	3916.4	3919.3
G5.0	3886.2	3885.8	3886.2	3888.0	3890.9	3895.2	3900.6	3903.8	3907.1	3909.6
G5.5	3875.4	3875.0	3875.8	3878.3	3881.5	3885.8	3891.2	3893.8	3897.4	3899.5
G6.0	3865.0	3865.0	3865.7	3868.2	3871.8	3876.1	3881.2	3883.7	3886.9	3888.0
G6.5	3853.8	3854.9	3855.6	3858.5	3862.4	3866.4	3871.1	3873.2	3875.4	3876.8
G7.0	3843.0	3844.4	3845.5	3848.4	3852.7	3856.7	3860.3	3862.4	3864.2	3866.0
G7.5	3832.6	3834.0	3835.4	3838.3	3843.4	3847.0	3849.8	3851.6	3852.7	3855.2
G8.0	3822.1	3823.6	3825.4	3828.6	3833.6	3837.2	3839.0	3840.5	3841.6	3844.4
G8.5	3812.0	3813.1	3814.9	3818.5	3824.3	3827.2	3828.6	3829.3	3830.8	3833.6
G9.0	3801.6	3803.0	3804.8	3808.4	3814.6	3817.1	3817.4	3818.2	3819.6	3823.2
G9.5	3790.8	3793.0	3794.4	3798.4	3805.2	3807.0	3806.6	3807.0	3808.8	3812.4
G10.0	3780.4	3782.9	3784.3	3788.3	3795.5	3796.9	3795.5	3795.8	3798.0	3801.2
G10.5	3769.9	3772.4	3773.2	3777.1	3784.3	3786.1	3784.7	3785.0	3787.2	3789.7
G11.0	3757.3	3760.6	3762.0	3765.6	3772.8	3775.7	3774.6	3775.0	3777.1	3777.8
G11.5	3744.0	3748.7	3750.5	3754.1	3761.6	3765.2	3764.2	3764.5	3767.0	3767.0
G12.0	3730.3	3736.1	3739.3	3742.9	3750.1	3754.8	3754.1	3754.4	3757.0	3756.6
G12.5	3716.6	3723.1	3727.8	3731.4	3739.0	3744.4	3744.0	3744.4	3746.2	3745.4
G13.0	3702.6	3710.2	3716.3	3720.2	3727.4	3733.6	3733.6	3734.3	3735.7	3734.6
G13.5	3688.9	3696.8	3704.4	3708.7	3716.3	3723.1	3723.5	3724.2	3725.6	3723.8
G14.0	3675.2	3683.9	3692.5	3697.6	3704.8	3712.7	3713.4	3714.1	3715.6	3713.4
G14.5	3661.6	3670.2	3680.6	3686.4	3693.6	3702.2	3703.0	3704.0	3705.5	3702.6
G15.0	3647.9	3656.9	3668.8	3675.2	3682.1	3691.8	3692.9	3694.0	3695.4	3691.8
G15.5	3634.2	3643.2	3657.6	3665.2	3672.4	3681.4	3682.4	3683.9	3685.0	3681.0
G16.0	3621.2	3632.8	3647.5	3655.1	3663.0	3670.9	3671.6	3673.1	3674.2	3669.8
G16.5	3610.1	3622.7	3637.4	3645.0	3653.3	3660.1	3660.8	3661.9	3661.9	3658.7
G17.0	3599.1	3612.2	3627.4	3634.9	3643.6	3649.7	3650.0	3650.8	3649.3	3646.1
G17.5	3588.2	3601.8	3617.3	3624.8	3634.2	3638.9	3639.2	3639.2	3636.7	3633.1
G18.0	3577.1	3591.2	3607.2	3614.8	3624.5	3628.1	3628.4	3627.7	3624.1	3620.2

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 51)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G18.5	3565.7	3580.6	3597.1	3604.7	3614.8	3617.6	3617.6	3616.2	3611.2	3606.8
G19.0	3554.5	3570.0	3587.0	3594.7	3605.4	3606.8	3606.8	3604.3	3598.3	3593.7
G19.5	3543.6	3559.3	3577.0	3584.6	3595.7	3596.0	3595.8	3592.5	3585.6	3579.8
G20.0	3533.0	3548.7	3567.1	3574.5	3586.1	3585.2	3585.0	3580.3	3573.0	3565.3
G20.5	3522.6	3538.2	3552.5	3556.4	3566.6	3567.7	3570.8	3567.8	3560.4	3550.7
G21.0	3512.1	3520.3	3531.7	3537.1	3547.0	3549.1	3552.3	3550.9	3547.7	3535.9
G21.5	3493.5	3499.2	3510.9	3517.8	3527.5	3530.6	3533.8	3532.4	3530.7	3520.9
G22.0	3470.8	3478.1	3490.0	3498.4	3507.9	3512.0	3515.4	3513.9	3511.8	3505.0
G22.5	3448.2	3457.2	3469.0	3479.2	3488.4	3493.5	3497.1	3495.5	3493.0	3486.2
G23.0	3425.6	3436.1	3448.0	3459.9	3468.8	3475.0	3478.8	3477.1	3474.5	3467.3
G23.5	3403.0	3415.2	3426.8	3440.7	3449.3	3456.5	3460.5	3458.8	3456.0	3448.4
G24.0	3380.4	3394.0	3405.7	3421.3	3429.7	3438.0	3442.1	3440.6	3437.8	3429.5
G24.5	3357.8	3372.6	3384.6	3401.7	3410.2	3419.5	3423.6	3422.3	3419.0	3410.5
G25.0	3335.2	3351.0	3363.6	3382.2	3390.6	3400.9	3405.3	3403.9	3400.3	3391.7
G25.5	3312.7	3329.2	3340.9	3356.6	3364.4	3375.1	3384.0	3385.5	3381.7	3372.9
G26.0	3290.3	3305.2	3314.8	3329.9	3338.1	3347.8	3356.5	3362.4	3363.3	3354.3
G26.5	3267.1	3278.7	3288.7	3303.2	3311.9	3320.5	3328.8	3333.8	3342.7	3335.8
G27.0	3240.9	3252.4	3262.5	3276.6	3285.6	3293.2	3301.2	3305.3	3313.4	3317.3
G27.5	3214.4	3226.2	3236.4	3250.0	3259.4	3265.9	3273.4	3276.9	3283.7	3292.8
G28.0	3187.9	3200.2	3210.3	3223.5	3233.1	3238.6	3245.6	3248.5	3253.9	3263.2
G28.5	3161.5	3174.0	3184.1	3197.1	3206.8	3211.3	3217.7	3220.1	3224.2	3233.4
G29.0	3135.2	3147.8	3157.9	3170.7	3180.6	3184.1	3189.8	3191.7	3194.6	3203.5
G29.5	3109.1	3121.7	3131.7	3144.3	3154.4	3156.8	3161.8	3163.1	3165.2	3173.3
G30.0	3083.2	3095.6	3105.4	3118.0	3128.1	3129.6	3133.7	3134.4	3135.9	3142.3
G30.5	3057.4	3069.6	3078.7	3090.6	3100.4	3102.7	3105.8	3105.8	3106.7	3111.2
G31.0	3031.1	3042.7	3050.2	3062.8	3072.7	3075.8	3079.0	3077.6	3077.6	3080.0
G31.5	3005.0	3013.3	3021.8	3034.9	3045.0	3048.9	3052.4	3051.0	3048.4	3048.8
G32.0	2975.1	2983.9	2993.3	3007.1	3017.3	3022.1	3025.8	3024.6	3021.6	3017.5
G32.5	2944.5	2954.6	2964.9	2979.2	2989.6	2995.2	2999.2	2998.3	2995.3	2986.5
G33.0	2913.8	2925.3	2936.4	2951.3	2961.9	2968.3	2972.7	2971.7	2969.1	2960.2
G33.5	2883.1	2896.0	2908.0	2923.3	2934.3	2941.4	2946.3	2945.1	2942.9	2933.8
G34.0	2852.2	2866.7	2879.6	2895.3	2906.5	2914.5	2919.9	2918.7	2916.6	2907.5
G34.5	2821.1	2837.4	2851.2	2867.2	2878.8	2887.6	2893.6	2892.4	2890.2	2881.0
G35.0	2790.1	2808.2	2822.8	2839.1	2851.2	2860.7	2867.3	2866.2	2863.9	2854.6
G35.5	2759.2	2779.0	2794.8	2812.4	2824.8	2833.5	2840.8	2840.1	2837.9	2828.3
G36.0	2728.3	2750.2	2768.7	2786.1	2798.4	2806.2	2812.7	2813.9	2812.0	2802.2
G36.5	2697.6	2724.3	2742.6	2759.9	2772.0	2778.9	2784.6	2785.2	2786.4	2776.1

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 52)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G37.0	2669.7	2698.3	2716.5	2733.6	2745.6	2751.7	2756.4	2756.4	2758.7	2750.1
G37.5	2643.7	2672.3	2690.2	2707.3	2719.2	2724.4	2728.0	2727.5	2729.6	2724.2
G38.0	2617.7	2646.2	2664.0	2681.0	2692.8	2697.2	2699.8	2698.5	2699.7	2695.8
G38.5	2591.9	2620.2	2637.8	2654.7	2666.4	2670.0	2671.5	2669.6	2669.8	2665.8
G39.0	2566.2	2594.3	2611.8	2628.5	2640.0	2642.8	2643.3	2640.8	2639.9	2635.6
G39.5	2540.5	2568.6	2585.8	2602.3	2613.6	2615.6	2615.1	2612.1	2609.9	2605.4
G40.0	2514.9	2543.0	2559.9	2576.1	2587.2	2588.4	2587.0	2583.4	2579.9	2575.0
G40.5	2489.4	2517.5	2533.8	2548.5	2559.7	2561.4	2559.1	2554.8	2549.9	2544.4
G41.0	2464.1	2492.0	2505.5	2520.5	2532.1	2534.5	2532.7	2526.3	2519.8	2513.7
G41.5	2438.6	2462.9	2477.2	2492.5	2504.6	2507.5	2506.3	2500.1	2489.9	2483.0
G42.0	2411.2	2433.8	2448.9	2464.5	2477.0	2480.6	2479.8	2473.9	2462.0	2452.4
G42.5	2381.6	2404.4	2420.5	2436.4	2449.5	2453.7	2453.4	2447.7	2436.1	2421.9
G43.0	2351.8	2374.8	2392.1	2408.4	2421.9	2426.7	2426.9	2421.5	2410.2	2393.3
G43.5	2322.0	2345.3	2363.7	2380.3	2394.4	2399.8	2400.4	2395.3	2384.2	2367.4
G44.0	2292.1	2315.7	2335.2	2352.2	2366.8	2372.9	2373.9	2369.2	2358.3	2341.6
G44.5	2262.1	2286.2	2306.7	2324.2	2339.2	2345.9	2347.5	2343.1	2332.3	2316.1
G45.0	2232.0	2256.7	2278.3	2296.1	2311.7	2318.9	2321.0	2317.0	2306.3	2290.5
G45.5	2202.0	2227.2	2249.8	2267.2	2282.4	2289.7	2294.1	2290.9	2280.4	2264.9
G46.0	2172.1	2197.8	2221.2	2238.2	2253.0	2259.9	2263.6	2264.8	2254.7	2239.2
G46.5	2142.3	2169.3	2192.5	2209.2	2223.6	2230.1	2233.1	2234.1	2229.0	2213.6
G47.0	2113.4	2140.9	2163.8	2180.2	2194.3	2200.3	2202.6	2203.5	2200.8	2187.9
G47.5	2085.3	2112.5	2135.1	2151.2	2165.0	2170.5	2172.1	2172.9	2169.4	2162.5
G48.0	2057.3	2084.3	2106.5	2122.2	2135.6	2140.7	2141.6	2142.1	2138.1	2135.1
G48.5	2029.2	2056.1	2077.8	2093.3	2106.3	2110.9	2111.1	2111.3	2106.8	2103.7
G49.0	2001.2	2027.9	2049.1	2064.4	2076.9	2081.1	2080.6	2080.4	2075.4	2072.2
G49.5	1973.2	1999.7	2020.4	2035.5	2047.6	2051.4	2050.1	2049.4	2043.9	2040.6
G50.0	1945.4	1971.4	1991.7	2006.6	2018.2	2021.6	2019.6	2018.4	2012.3	2008.9
G50.5	1917.7	1943.2	1962.8	1976.4	1988.0	1991.9	1989.3	1987.3	1980.6	1977.0
G51.0	1889.9	1914.9	1932.0	1945.8	1957.7	1962.1	1960.1	1956.3	1948.9	1944.7
G51.5	1862.2	1883.7	1901.4	1915.2	1927.5	1932.4	1930.9	1927.4	1917.1	1912.4
G52.0	1832.7	1852.6	1870.8	1884.7	1897.2	1902.6	1901.7	1898.5	1886.9	1880.1
G52.5	1801.5	1821.5	1840.2	1854.1	1867.0	1872.9	1872.6	1869.7	1858.3	1847.7
G53.0	1770.5	1790.5	1809.6	1823.5	1836.8	1843.1	1843.5	1841.0	1829.9	1817.4
G53.5	1739.4	1759.6	1779.0	1792.9	1806.5	1813.4	1814.3	1812.3	1801.7	1789.2
G54.0	1708.3	1728.6	1748.5	1762.4	1776.3	1783.6	1785.2	1783.6	1773.4	1761.3
G54.5	1677.2	1697.8	1717.9	1731.8	1746.0	1753.8	1756.0	1754.9	1745.2	1733.4
G55.0	1646.0	1666.8	1687.4	1701.3	1715.8	1724.1	1727.0	1726.2	1717.1	1705.6

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 53)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G55.5	1614.7	1635.9	1657.0	1671.9	1686.3	1694.4	1697.7	1697.7	1689.0	1677.8
G56.0	1583.4	1605.4	1628.2	1642.8	1656.8	1664.7	1667.5	1668.8	1660.9	1650.1
G56.5	1552.1	1577.1	1599.4	1613.8	1627.3	1634.9	1637.2	1638.1	1632.8	1622.5
G57.0	1523.1	1548.9	1570.6	1584.7	1597.9	1605.1	1607.0	1607.3	1602.8	1594.9
G57.5	1495.4	1520.7	1541.9	1555.6	1568.4	1575.4	1576.8	1576.5	1572.0	1567.4
G58.0	1467.9	1492.6	1513.2	1526.6	1539.0	1545.6	1546.5	1545.8	1541.4	1537.1
G58.5	1440.4	1464.5	1484.5	1497.5	1509.5	1515.7	1516.2	1515.1	1510.7	1506.2
G59.0	1413.0	1436.5	1455.8	1468.5	1480.0	1485.9	1486.0	1484.3	1480.2	1475.4
G59.5	1385.5	1408.6	1427.2	1439.4	1450.5	1456.0	1455.7	1453.6	1449.8	1444.6
G60.0	1358.2	1380.7	1398.6	1410.4	1421.1	1426.2	1425.4	1422.8	1419.4	1413.9
G60.5	1330.9	1352.8	1369.7	1380.4	1390.9	1396.4	1395.4	1392.1	1389.0	1383.3
G61.0	1303.7	1324.2	1339.5	1350.2	1360.8	1366.6	1366.2	1362.1	1358.7	1352.7
G61.5	1276.6	1293.8	1309.3	1320.0	1330.7	1336.9	1337.0	1333.4	1328.5	1322.1
G62.0	1246.4	1263.5	1279.1	1289.8	1300.6	1307.2	1307.8	1304.8	1300.2	1291.5
G62.5	1216.1	1233.2	1248.9	1259.6	1270.5	1277.5	1278.7	1276.2	1272.1	1261.8
G63.0	1185.8	1202.9	1218.7	1229.4	1240.3	1247.8	1249.6	1247.6	1244.1	1234.2
G63.5	1155.6	1172.6	1188.5	1199.3	1210.2	1218.1	1220.5	1219.0	1216.0	1206.6
G64.0	1125.4	1142.3	1158.3	1169.1	1180.1	1188.4	1191.4	1190.4	1188.1	1179.2
G64.5	1095.3	1112.0	1128.0	1139.0	1150.0	1158.7	1162.3	1161.8	1160.1	1151.9
G65.0	1065.2	1081.8	1097.7	1108.8	1119.9	1129.1	1133.3	1133.2	1132.1	1124.6
G65.5	1035.3	1051.5	1069.2	1083.0	1094.5	1102.8	1105.3	1104.7	1104.2	1097.4
G66.0	1005.3	1024.3	1044.6	1058.0	1069.2	1077.2	1079.4	1077.4	1076.3	1070.3
G66.5	977.5	1000.3	1020.0	1032.9	1043.9	1051.6	1053.6	1051.5	1049.0	1043.2
G67.0	954.1	976.3	995.4	1007.9	1018.5	1026.0	1027.7	1025.6	1023.2	1016.3
G67.5	930.8	952.3	970.8	982.9	993.2	1000.4	1001.9	999.7	997.3	990.2
G68.0	907.5	928.4	946.3	957.9	967.9	974.7	976.1	973.9	971.5	964.4
G68.5	884.3	904.5	921.7	932.9	942.6	949.1	950.3	948.1	945.6	938.5
G69.0	861.0	880.7	897.3	907.9	917.2	923.4	924.4	922.2	919.8	912.8
G69.5	837.9	856.9	872.8	882.9	891.9	897.8	898.6	896.5	893.9	887.1
G70.0	814.7	833.0	848.3	857.9	866.6	872.1	872.8	870.7	868.1	861.4
G70.5	791.6	809.2	825.1	836.0	845.1	850.1	849.0	845.0	842.2	835.8
G71.0	768.5	787.2	803.6	814.5	823.6	828.8	827.9	822.8	816.4	810.3
G71.5	746.9	765.7	782.0	793.0	802.1	807.5	806.8	801.9	794.6	784.7
G72.0	725.8	744.3	760.4	771.6	780.6	786.2	785.7	781.0	774.0	762.0
G72.5	704.6	722.8	738.8	750.2	759.1	764.9	764.6	760.2	753.6	741.9
G73.0	683.5	701.5	717.3	728.7	737.6	743.5	743.5	739.3	733.1	721.7
G73.5	662.4	680.1	695.7	707.3	716.1	722.2	722.5	718.5	712.6	701.6

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 54)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G74.0	641.4	658.8	674.1	685.8	694.6	701.0	701.4	697.7	692.1	681.6
G74.5	620.3	637.5	652.5	664.4	673.1	679.6	680.3	676.9	671.7	661.5
G75.0	599.3	616.1	631.0	643.0	651.6	658.4	659.3	656.1	651.3	641.4
G75.5	578.3	594.9	610.0	622.0	630.4	636.9	638.0	635.3	630.9	621.4
G76.0	557.7	574.8	589.5	601.1	609.3	615.6	616.5	613.8	610.2	601.4
G76.5	538.2	554.8	569.1	580.2	588.2	594.1	594.9	592.4	588.7	581.0
G77.0	518.8	534.8	548.6	559.3	567.0	572.7	573.4	570.9	567.2	559.8
G77.5	499.5	514.8	528.2	538.4	545.9	551.3	551.9	549.4	545.7	538.6
G78.0	480.1	494.8	507.7	517.5	524.7	529.9	530.4	528.0	524.2	517.4
G78.5	460.8	474.8	487.3	496.6	503.6	508.5	508.9	506.5	502.8	496.2
G79.0	441.4	454.8	466.8	475.7	482.5	487.0	487.4	485.0	481.3	475.0
G79.5	422.1	434.8	446.4	454.8	461.3	465.6	465.8	463.6	459.9	453.9
G80.0	402.9	414.8	426.0	433.9	440.2	444.2	444.3	442.1	438.4	432.7
G80.5	383.6	394.6	405.1	412.6	418.8	422.8	423.0	420.8	417.0	411.5
G81.0	363.5	373.8	383.9	391.4	397.3	401.4	401.8	399.8	396.3	390.5
G81.5	343.2	353.1	362.7	370.1	375.9	380.1	380.6	378.8	375.6	370.3
G82.0	323.0	332.3	341.5	348.8	354.5	358.7	359.4	357.9	354.9	350.0
G82.5	302.7	311.6	320.3	327.6	333.0	337.3	338.2	336.9	334.3	329.8
G83.0	282.5	290.9	299.2	306.3	311.6	315.9	317.0	316.0	313.7	309.6
G83.5	262.3	270.2	278.0	285.0	290.2	294.6	295.8	295.0	293.1	289.4
G84.0	242.0	249.5	256.8	263.7	268.7	273.2	274.6	274.0	272.5	269.2
G84.5	221.8	228.8	235.7	242.5	247.3	251.8	253.4	253.1	251.9	249.0
G85.0	201.6	208.1	214.5	221.2	225.9	230.5	232.2	232.2	231.3	228.8
G85.5	181.6	187.7	193.8	200.2	204.7	209.1	210.9	211.1	210.5	208.6
G86.0	162.0	167.4	173.1	179.2	183.4	187.8	189.6	189.9	189.6	188.0
G86.5	142.3	147.1	152.4	158.1	162.2	166.4	168.3	168.8	168.7	167.4
G87.0	122.7	126.8	131.7	137.1	141.0	145.1	146.9	147.6	147.7	146.8
G87.5	103.1	106.6	111.1	116.1	119.8	123.7	125.6	126.5	126.8	126.2
G88.0	83.4	86.3	90.4	95.1	98.6	102.4	104.3	105.3	105.9	105.7
G88.5	63.8	66.0	69.7	74.1	77.4	81.0	83.0	84.2	85.0	85.1
G89.0	44.2	45.8	49.1	53.1	56.2	59.7	61.7	63.0	64.0	64.5
G89.5	24.6	25.5	28.4	32.0	35.0	38.3	40.4	41.9	43.1	44.0
G90.0	5.5	5.8	8.6	12.3	15.3	18.9	21.2	23.0	24.7	26.0
G90.5	13.5	14.1	18.7	24.9	30.0	36.0	39.9	42.9	45.5	47.6
G91.0	17.5	18.1	22.5	28.6	33.5	39.4	43.2	45.9	48.4	50.3
G91.5	21.4	22.1	26.3	32.4	37.1	42.8	46.4	49.0	51.3	53.0
G92.0	25.4	26.1	30.1	36.1	40.6	46.2	49.7	52.1	54.2	55.6

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 55)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G92.5	29.4	30.1	34.0	39.8	44.2	49.6	52.9	55.2	57.1	58.3
G93.0	33.3	34.0	37.8	43.5	47.8	53.0	56.1	58.2	59.9	60.9
G93.5	37.3	38.0	41.6	47.2	51.3	56.4	59.4	61.3	62.8	63.6
G94.0	41.3	42.0	45.4	51.0	54.9	59.7	62.6	64.4	65.7	66.3
G94.5	45.2	46.0	49.3	54.7	58.4	63.1	65.9	67.4	68.6	68.9
G95.0	49.3	50.0	53.1	58.4	62.0	66.5	69.1	70.5	71.4	71.6
G95.5	53.3	54.1	57.2	62.3	65.7	70.0	72.4	73.6	74.3	74.2
G96.0	57.4	58.2	61.3	66.2	69.5	73.5	75.7	76.7	77.2	76.8
G96.5	61.4	62.3	65.4	70.1	73.3	77.1	79.0	79.8	80.0	79.4
G97.0	65.5	66.4	69.5	74.0	77.0	80.6	82.3	82.9	82.9	82.1
G97.5	69.5	70.5	73.6	77.9	80.8	84.1	85.6	86.0	85.8	84.7
G98.0	73.6	74.6	77.6	81.8	84.5	87.6	88.9	89.1	88.7	87.3
G98.5	77.7	78.7	81.7	85.6	88.3	91.1	92.2	92.2	91.6	90.0
G99.0	81.7	82.8	85.8	89.5	92.1	94.6	95.5	95.4	94.4	92.6
G99.5	85.8	86.9	89.9	93.4	95.8	98.2	98.8	98.5	97.4	95.5
G100.0	89.7	90.9	93.9	97.3	99.6	101.7	102.1	101.6	100.4	98.3
G100.5	93.6	94.8	97.8	101.1	103.2	105.1	105.5	104.8	103.4	101.1
G101.0	97.5	98.8	101.7	104.8	106.8	108.6	108.8	108.0	106.5	104.0
G101.5	101.4	102.7	105.5	108.6	110.5	112.1	112.2	111.2	109.5	106.9
G102.0	105.3	106.7	109.4	112.4	114.1	115.6	115.5	114.4	112.6	109.7
G102.5	109.3	110.7	113.3	116.1	117.8	119.1	118.9	117.6	115.6	112.6
G103.0	113.2	114.6	117.1	119.9	121.4	122.5	122.2	120.9	118.7	115.5
G103.5	117.1	118.6	121.0	123.6	125.0	126.0	125.5	124.1	121.8	118.3
G104.0	121.1	122.5	124.8	127.4	128.6	129.5	128.9	127.3	124.8	121.0
G104.5	125.2	126.5	128.7	131.2	132.3	133.0	132.2	130.5	127.7	123.6
G105.0	129.3	130.6	132.6	134.9	135.9	136.4	135.5	133.6	130.5	126.2
G105.5	133.5	134.8	136.7	138.8	139.6	139.9	138.8	136.6	133.4	128.8
G106.0	137.6	138.9	140.7	142.6	143.3	143.3	142.0	139.6	136.2	131.4
G106.5	141.8	143.1	144.8	146.5	147.0	146.8	145.3	142.7	139.1	134.1
G107.0	145.9	147.2	148.8	150.3	150.6	150.2	148.5	145.7	141.9	136.7
G107.5	150.1	151.3	152.9	154.2	154.3	153.6	151.7	148.8	144.8	139.3
G108.0	154.3	155.5	156.9	158.0	158.0	157.1	155.0	151.9	147.7	142.0
G108.5	158.4	159.6	160.9	161.8	161.7	160.5	158.2	154.9	150.5	146.0
G109.0	163.0	163.8	165.0	165.7	165.4	164.0	161.5	158.0	154.1	151.5
G109.5	168.9	168.4	169.0	169.5	169.1	167.4	164.8	161.8	159.7	157.0
G110.0	174.8	174.4	174.2	173.7	172.7	171.2	169.5	167.6	165.4	162.5
G110.5	180.8	180.5	180.3	179.8	178.8	177.3	175.4	173.4	171.0	168.0

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 56)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G111.0	186.7	186.6	186.4	185.9	184.9	183.3	181.4	179.3	176.7	173.5
G111.5	192.7	192.6	192.5	192.0	191.0	189.3	187.3	185.1	182.3	179.0
G112.0	198.6	198.7	198.6	198.1	197.1	195.3	193.2	190.9	188.0	184.6
G112.5	204.6	204.7	204.7	204.2	203.2	201.4	199.2	196.8	193.7	190.2
G113.0	210.5	210.8	210.8	210.3	209.3	207.4	205.1	202.6	199.4	196.0
G113.5	216.5	216.9	216.9	216.4	215.4	213.4	211.0	208.4	205.1	203.3
G114.0	224.1	223.0	223.0	222.6	221.4	219.4	217.0	214.3	212.0	210.6
G114.5	232.5	230.3	229.1	228.7	227.5	225.5	222.9	221.2	219.7	218.0
G115.0	240.9	238.7	236.9	235.2	233.6	231.9	230.3	229.0	227.3	225.3
G115.5	249.4	247.2	245.4	243.7	242.0	240.2	238.4	236.9	235.0	232.7
G116.0	257.8	255.7	253.9	252.2	250.4	248.4	246.5	244.8	242.6	240.1
G116.5	266.2	264.2	262.4	260.7	258.8	256.7	254.6	252.7	250.3	247.6
G117.0	274.7	272.7	270.9	269.2	267.2	265.0	262.7	260.6	258.0	255.0
G117.5	283.1	281.2	279.4	277.7	275.6	273.3	270.9	268.6	265.7	262.5
G118.0	291.6	289.7	287.9	286.2	284.0	281.5	279.0	276.5	273.4	270.6
G118.5	300.0	298.3	296.4	294.7	292.4	289.8	287.1	284.5	281.2	278.9
G119.0	308.0	306.8	305.0	303.2	300.8	298.1	295.2	292.4	289.6	287.3
G119.5	316.0	315.0	313.5	311.7	309.2	306.4	303.4	300.8	298.0	295.6
G120.0	323.9	323.2	321.8	320.1	317.6	314.7	311.9	309.3	306.5	304.0
G120.5	331.9	331.3	330.1	328.5	326.1	323.3	320.4	317.8	314.9	312.4
G121.0	339.9	339.5	338.4	337.0	334.6	331.8	329.0	326.3	323.4	320.7
G121.5	347.9	347.7	346.7	345.4	343.1	340.4	337.6	334.9	331.9	329.1
G122.0	356.0	355.8	355.0	353.8	351.6	348.9	346.2	343.4	340.4	337.6
G122.5	364.0	364.0	363.3	362.2	360.1	357.5	354.7	351.9	349.0	345.8
G123.0	372.1	372.2	371.7	370.7	368.6	366.0	363.3	360.5	357.5	353.3
G123.5	380.3	380.4	380.0	379.1	377.1	374.6	371.9	369.0	365.8	360.8
G124.0	389.1	388.6	388.3	387.5	385.6	383.2	380.5	377.5	373.5	368.3
G124.5	397.8	397.2	396.6	396.0	394.1	391.7	389.1	385.5	381.2	375.8
G125.0	406.6	405.9	405.2	404.4	402.6	400.2	397.3	393.5	388.9	383.4
G125.5	415.3	414.6	413.9	413.0	411.0	408.5	405.4	401.4	396.7	391.0
G126.0	424.1	423.4	422.5	421.5	419.4	416.7	413.5	409.3	404.5	398.6
G126.5	432.8	432.1	431.2	430.0	427.7	425.0	421.6	417.3	412.2	406.2
G127.0	441.6	440.8	439.9	438.6	436.1	433.2	429.7	425.3	420.0	413.9
G127.5	450.3	449.5	448.5	447.1	444.5	441.4	437.8	433.2	427.9	422.2
G128.0	459.0	458.2	457.1	455.6	452.9	449.7	445.9	441.2	435.7	431.0
G128.5	467.4	466.9	465.8	464.1	461.3	457.9	454.0	449.2	444.1	439.9
G129.0	475.4	475.6	474.4	472.7	469.7	466.2	462.2	457.2	453.0	448.8

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 57)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G129.5	483.5	483.8	483.0	481.2	478.1	474.4	470.3	465.9	461.9	457.8
G130.0	491.6	491.9	491.3	489.7	486.5	482.8	478.9	474.7	470.8	466.7
G130.5	499.6	500.1	499.5	498.1	495.0	491.4	487.7	483.5	479.7	475.6
G131.0	507.7	508.3	507.8	506.5	503.5	500.1	496.4	492.3	488.5	484.6
G131.5	515.8	516.5	516.1	514.9	512.0	508.7	505.1	501.1	497.4	493.5
G132.0	523.9	524.7	524.4	523.3	520.5	517.4	513.8	509.9	506.3	502.5
G132.5	532.0	532.9	532.8	531.7	529.0	526.1	522.5	518.7	515.2	510.3
G133.0	540.2	541.1	541.1	540.1	537.5	534.7	531.2	527.5	524.1	517.5
G133.5	548.1	549.4	549.5	548.5	546.0	543.4	540.0	536.3	531.9	524.7
G134.0	556.0	557.6	557.9	557.0	554.5	552.1	548.7	545.2	539.0	531.9
G134.5	563.8	565.2	566.3	565.4	563.0	560.8	557.4	552.2	546.1	539.1
G135.0	571.6	572.7	573.8	573.5	571.5	569.1	564.5	559.1	553.2	546.3
G135.5	579.4	580.2	581.1	580.7	578.6	576.0	571.5	566.1	560.3	553.5
G136.0	587.3	587.8	588.3	587.8	585.6	583.0	578.5	573.1	567.3	560.8
G136.5	595.1	595.3	595.6	595.0	592.6	589.9	585.5	580.2	574.4	568.0
G137.0	602.9	602.8	602.8	602.2	599.7	596.9	592.4	587.2	581.5	575.2
G137.5	610.7	610.2	610.0	609.3	606.7	603.8	599.4	594.2	588.6	583.1
G138.0	618.4	617.7	617.3	616.5	613.7	610.7	606.4	601.3	595.7	591.6
G138.5	625.8	625.1	624.5	623.6	620.8	617.7	613.4	608.3	603.3	600.0
G139.0	632.8	632.6	631.7	630.8	627.8	624.6	620.3	615.3	611.5	608.5
G139.5	639.7	639.6	639.0	637.9	634.9	631.5	627.3	623.1	619.6	617.0
G140.0	646.7	646.5	646.0	645.0	641.9	638.6	634.8	631.0	627.7	625.5
G140.5	653.7	653.4	653.0	652.1	649.1	646.0	642.4	638.8	635.9	633.9
G141.0	660.6	660.4	660.0	659.1	656.3	653.4	650.0	646.7	644.0	642.4
G141.5	667.6	667.3	666.9	666.1	663.5	660.9	657.6	654.5	652.1	650.8
G142.0	674.6	674.2	673.9	673.1	670.6	668.3	665.2	662.3	660.2	659.2
G142.5	681.7	681.2	680.9	680.1	677.8	675.7	672.8	670.2	668.3	667.0
G143.0	688.7	688.1	687.9	687.2	685.0	683.1	680.4	678.0	676.4	674.1
G143.5	695.9	695.0	694.9	694.1	692.2	690.6	688.0	685.8	684.0	681.3
G144.0	703.7	702.0	701.9	701.2	699.4	698.0	695.5	693.5	691.1	688.4
G144.5	711.4	709.5	708.9	708.2	706.6	705.4	703.1	700.7	698.2	695.6
G145.0	719.1	717.1	716.2	715.3	713.8	712.6	710.1	707.6	705.2	702.9
G145.5	726.8	724.6	723.4	722.4	720.8	719.5	717.1	714.6	712.3	710.0
G146.0	734.5	732.2	730.7	729.6	727.8	726.5	724.0	721.6	719.5	717.2
G146.5	742.0	739.7	738.0	736.7	734.8	733.5	731.0	728.7	726.6	724.3
G147.0	749.5	747.3	745.3	743.9	741.8	740.4	737.9	735.7	733.7	731.4
G147.5	757.0	754.8	752.5	751.0	748.9	747.4	744.9	742.7	740.7	738.6

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 58)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G148.0	764.5	762.3	759.9	758.2	755.9	754.3	751.9	749.6	747.8	746.8
G148.5	771.9	769.7	767.2	765.4	762.9	761.3	758.9	756.7	755.1	755.1
G149.0	778.8	777.1	774.5	772.5	769.9	768.3	766.0	763.7	763.1	763.4
G149.5	785.7	784.1	781.8	779.6	776.9	775.2	773.0	771.3	771.2	771.7
G150.0	792.7	791.0	788.8	786.7	783.9	782.3	780.4	779.1	779.1	780.0
G150.5	799.6	797.9	795.7	793.8	791.2	789.6	787.9	786.8	786.9	788.3
G151.0	806.5	804.9	802.7	800.8	798.4	796.9	795.4	794.6	794.8	796.5
G151.5	813.4	811.9	809.6	807.8	805.6	804.2	802.9	802.3	802.7	804.7
G152.0	820.4	818.8	816.6	814.8	812.8	811.6	810.3	810.1	810.5	812.8
G152.5	827.2	825.8	823.5	821.8	820.0	818.8	817.8	817.7	818.4	820.9
G153.0	834.1	832.7	830.5	828.8	827.1	826.1	825.3	825.4	826.2	827.5
G153.5	841.1	839.6	837.5	835.9	834.4	833.4	832.8	833.1	834.1	832.3
G154.0	846.8	846.6	844.5	842.9	841.6	840.6	840.3	840.7	839.4	837.0
G154.5	852.2	852.5	851.5	849.8	848.8	847.9	847.8	846.7	844.1	841.9
G155.0	857.5	857.5	857.0	856.5	856.0	854.7	853.3	851.3	848.8	846.7
G155.5	862.9	862.6	861.9	861.3	860.6	859.3	857.8	855.9	853.5	851.5
G156.0	868.2	867.6	866.7	866.1	865.1	863.9	862.4	860.5	858.1	856.3
G156.5	873.4	872.5	871.6	870.9	869.7	868.5	866.9	865.1	862.8	861.1
G157.0	878.6	877.4	876.3	875.7	874.2	873.0	871.5	869.6	867.5	865.8
G157.5	883.8	882.3	881.1	880.4	878.8	877.6	876.0	874.3	872.2	870.6
G158.0	888.9	887.2	885.8	885.1	883.3	882.2	880.6	878.8	876.8	875.4
G158.5	894.0	892.1	890.6	889.8	887.9	886.7	885.1	883.5	881.6	879.0
G159.0	898.1	897.1	895.4	894.6	892.5	891.3	889.7	888.1	885.8	882.2
G159.5	900.4	901.2	900.2	899.3	897.0	895.9	894.3	892.3	888.8	885.5
G160.0	902.6	903.5	903.5	903.6	901.5	900.2	897.7	895.0	891.8	888.7
G160.5	904.9	905.7	905.7	905.8	903.9	902.5	900.4	897.8	894.8	891.8
G161.0	907.1	907.9	907.9	908.0	906.3	904.9	902.9	900.6	897.9	895.1
G161.5	909.5	910.1	910.2	910.2	908.7	907.2	905.5	903.3	900.8	898.3
G162.0	911.8	912.3	912.4	912.4	911.0	909.5	908.1	906.0	903.8	901.4
G162.5	914.1	914.6	914.7	914.6	913.4	911.8	910.7	908.7	906.8	904.6
G163.0	916.4	916.9	916.9	916.9	915.7	914.2	913.2	911.4	909.6	907.7
G163.5	918.7	919.2	919.1	919.1	918.1	916.6	915.7	914.1	912.5	910.8
G164.0	921.0	921.5	921.4	921.4	920.4	918.9	918.1	916.8	915.3	913.2
G164.5	923.6	923.8	923.6	923.7	922.8	921.3	920.6	919.5	917.7	915.6
G165.0	926.2	926.2	925.9	926.0	925.1	923.6	922.8	921.6	919.9	918.0
G165.5	928.8	928.5	928.2	928.2	927.2	925.8	924.9	923.8	922.2	920.4
G166.0	931.3	930.9	930.5	930.4	929.3	927.9	927.1	926.0	924.4	922.8

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 59)

Unit: cd

G\C	C250.0	C255.0	C260.0	C265.0	C270.0	C275.0	C280.0	C285.0	C290.0	C295.0
G166.5	933.8	933.3	932.9	932.5	931.4	930.0	929.1	928.2	926.7	925.1
G167.0	936.3	935.7	935.2	934.8	933.5	932.1	931.4	930.3	929.0	927.5
G167.5	938.7	938.1	937.5	936.9	935.6	934.3	933.5	932.5	931.3	929.9
G168.0	941.2	940.4	939.8	939.1	937.7	936.4	935.7	934.8	933.6	932.4
G168.5	943.5	942.8	942.1	941.3	939.7	938.5	937.9	937.0	935.9	934.8
G169.0	945.9	945.1	944.4	943.3	941.8	940.6	940.0	939.1	938.1	937.1
G169.5	948.2	947.3	946.5	945.4	943.9	942.8	942.2	941.3	940.5	939.9
G170.0	950.3	949.6	948.7	947.5	946.0	944.9	944.4	943.8	943.2	942.8
G170.5	952.5	951.8	950.9	949.8	948.4	947.3	946.8	946.3	945.9	945.6
G171.0	954.8	954.0	953.1	952.0	950.7	949.8	949.2	948.9	948.5	948.3
G171.5	956.9	956.2	955.3	954.3	953.2	952.2	951.6	951.4	951.2	951.0
G172.0	959.1	958.4	957.5	956.6	955.6	954.6	954.1	953.9	953.7	953.6
G172.5	961.3	960.6	959.7	958.8	957.9	957.0	956.5	956.3	956.2	956.3
G173.0	963.4	962.7	961.9	961.1	960.4	959.5	958.9	958.7	958.7	959.0
G173.5	965.6	964.9	964.2	963.4	962.7	961.9	961.4	961.1	961.1	961.4
G174.0	967.8	967.1	966.4	965.7	965.1	964.4	963.8	963.6	963.5	963.9
G174.5	969.9	969.2	968.7	968.0	967.6	966.8	966.3	966.0	966.0	966.2
G175.0	972.0	971.4	970.8	970.3	969.9	969.2	968.7	968.4	968.3	968.4
G175.5	974.1	973.4	972.9	972.3	972.0	971.4	970.9	970.6	970.5	970.5
G176.0	976.1	975.5	974.9	974.4	974.0	973.4	973.0	972.7	972.7	972.7
G176.5	978.1	977.5	976.9	976.4	976.1	975.6	975.2	975.0	974.9	975.0
G177.0	980.1	979.5	978.9	978.5	978.1	977.7	977.4	977.2	977.0	977.1
G177.5	981.9	981.4	980.9	980.5	980.1	979.8	979.5	979.4	979.2	979.2
G178.0	983.7	983.2	982.8	982.5	982.2	981.9	981.7	981.5	981.5	981.5
G178.5	985.4	985.1	984.7	984.4	984.2	984.0	983.9	983.7	983.7	983.7
G179.0	987.1	986.9	986.7	986.4	986.3	986.2	986.0	986.0	986.0	986.0
G179.5	988.7	988.7	988.5	988.4	988.3	988.2	988.2	988.2	988.2	988.2
G180.0	991.7	991.7	991.7	991.7	991.7	991.7	991.7	991.7	991.7	991.7

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 60)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G0.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0	4005.0
G0.5	3995.6	3996.0	3996.7	3997.4	3998.2	3999.2	4000.0	4001.0	4001.8	4002.8
G1.0	3986.6	3987.7	3989.2	3990.6	3992.0	3993.8	3995.3	3997.1	3998.9	4000.7
G1.5	3978.0	3979.8	3982.0	3983.4	3984.8	3986.6	3988.4	3990.6	3992.8	3994.9
G2.0	3969.7	3970.8	3972.2	3974.0	3976.2	3978.4	3980.9	3983.4	3986.3	3989.2
G2.5	3959.3	3961.1	3962.9	3965.4	3967.9	3970.4	3973.3	3976.6	3979.8	3983.8
G3.0	3949.6	3951.7	3954.2	3956.8	3959.3	3962.5	3965.8	3969.7	3973.7	3978.4
G3.5	3940.2	3942.7	3944.9	3947.4	3950.6	3954.2	3958.2	3963.2	3968.3	3973.7
G4.0	3931.2	3933.0	3935.5	3938.4	3942.0	3946.7	3951.7	3957.5	3963.2	3969.7
G4.5	3921.1	3923.3	3925.8	3929.8	3934.1	3939.5	3945.2	3951.4	3957.5	3964.0
G5.0	3911.0	3913.2	3916.8	3921.1	3926.2	3931.9	3937.7	3944.2	3951.0	3958.2
G5.5	3901.0	3903.5	3907.8	3912.5	3917.9	3924.0	3930.5	3937.3	3943.8	3950.6
G6.0	3890.5	3894.1	3898.4	3903.8	3910.0	3916.4	3922.2	3928.3	3935.2	3942.7
G6.5	3879.7	3884.0	3889.4	3895.6	3902.0	3907.4	3913.2	3919.7	3926.5	3934.4
G7.0	3869.3	3874.0	3880.1	3887.3	3892.7	3898.1	3904.2	3910.3	3917.5	3925.8
G7.5	3858.8	3863.9	3870.4	3876.8	3883.0	3888.4	3894.1	3900.6	3908.5	3917.5
G8.0	3848.4	3853.4	3859.6	3865.3	3872.5	3877.9	3884.0	3891.2	3899.5	3908.9
G8.5	3837.6	3842.6	3847.7	3853.8	3860.3	3867.5	3874.0	3881.5	3890.5	3899.9
G9.0	3826.8	3831.1	3835.4	3841.2	3847.7	3856.3	3864.2	3871.8	3880.4	3889.8
G9.5	3815.6	3818.9	3823.2	3828.6	3835.4	3844.8	3854.2	3861.7	3870.4	3879.4
G10.0	3804.1	3806.3	3810.2	3816.0	3823.2	3832.6	3843.4	3851.3	3858.5	3866.8
G10.5	3791.2	3793.3	3797.6	3803.0	3811.0	3819.6	3830.8	3839.0	3846.2	3854.2
G11.0	3778.6	3780.4	3784.7	3790.1	3797.3	3806.6	3817.1	3827.5	3833.3	3840.8
G11.5	3765.2	3767.8	3771.4	3776.8	3783.2	3791.9	3802.7	3813.8	3819.6	3827.5
G12.0	3754.1	3754.8	3758.0	3762.4	3768.8	3776.8	3786.8	3798.7	3805.9	3814.9
G12.5	3743.3	3742.9	3744.7	3748.0	3753.4	3760.9	3770.6	3783.2	3792.6	3801.6
G13.0	3732.5	3731.4	3730.0	3732.8	3737.5	3744.7	3754.4	3767.4	3779.3	3787.9
G13.5	3721.7	3720.2	3717.4	3716.6	3721.3	3728.5	3738.6	3751.9	3766.0	3774.2
G14.0	3710.5	3709.1	3705.1	3700.1	3704.8	3712.0	3722.0	3735.7	3751.9	3758.0
G14.5	3699.7	3697.2	3692.2	3686.8	3688.2	3695.4	3705.1	3718.8	3735.7	3742.2
G15.0	3688.6	3685.3	3679.2	3673.4	3671.6	3677.8	3687.5	3700.4	3717.4	3726.0
G15.5	3677.8	3673.4	3666.2	3660.5	3655.8	3659.4	3668.8	3681.7	3699.0	3709.4
G16.0	3667.0	3661.6	3653.3	3647.2	3641.0	3640.7	3649.7	3663.0	3680.3	3693.2
G16.5	3655.8	3649.0	3640.7	3633.5	3625.6	3621.6	3630.6	3643.9	3661.6	3677.0
G17.0	3644.6	3636.4	3627.7	3620.5	3610.4	3602.2	3611.5	3624.5	3642.8	3659.4
G17.5	3631.3	3624.1	3615.1	3606.1	3594.9	3585.7	3591.9	3604.3	3622.3	3641.4
G18.0	3617.3	3611.9	3602.5	3591.7	3579.4	3570.0	3571.1	3583.5	3601.8	3622.3

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 61)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G18.5	3602.2	3597.2	3589.7	3577.6	3563.9	3554.0	3550.0	3562.1	3580.2	3602.9
G19.0	3587.0	3581.7	3576.9	3562.7	3548.6	3536.9	3528.2	3540.5	3558.4	3581.9
G19.5	3571.8	3566.1	3561.7	3547.7	3533.4	3520.0	3506.7	3518.5	3536.1	3560.1
G20.0	3556.8	3550.0	3544.3	3532.8	3517.9	3502.6	3488.5	3496.4	3513.5	3537.8
G20.5	3541.6	3533.7	3526.6	3518.1	3502.2	3484.9	3470.3	3473.1	3490.4	3515.2
G21.0	3526.3	3517.2	3507.9	3501.4	3486.8	3467.3	3452.0	3449.9	3466.8	3492.0
G21.5	3511.1	3500.1	3489.3	3482.7	3470.1	3449.8	3433.0	3425.6	3442.9	3468.3
G22.0	3495.8	3482.4	3470.8	3463.5	3453.3	3432.5	3414.2	3401.2	3418.3	3443.9
G22.5	3480.4	3464.4	3452.3	3443.9	3436.6	3415.1	3394.5	3376.2	3393.4	3418.6
G23.0	3462.5	3446.2	3433.8	3423.9	3416.6	3397.8	3374.6	3353.7	3367.7	3393.2
G23.5	3442.5	3428.2	3415.3	3403.0	3395.6	3380.6	3354.6	3332.2	3341.9	3367.6
G24.0	3422.9	3410.1	3396.1	3382.1	3374.6	3361.9	3334.1	3310.5	3316.0	3342.0
G24.5	3403.5	3390.0	3375.9	3361.4	3353.3	3343.4	3313.7	3288.9	3290.1	3316.5
G25.0	3383.5	3369.8	3355.5	3341.2	3331.7	3324.3	3293.4	3267.3	3263.9	3290.7
G25.5	3363.6	3349.6	3334.7	3321.1	3308.6	3300.0	3273.2	3245.7	3237.7	3264.0
G26.0	3343.8	3329.5	3313.5	3300.8	3284.9	3275.6	3252.7	3223.8	3210.3	3237.0
G26.5	3324.2	3309.5	3292.3	3278.7	3260.9	3251.1	3232.0	3202.0	3182.1	3208.2
G27.0	3304.5	3289.4	3271.1	3256.3	3237.0	3226.6	3211.4	3179.4	3153.3	3179.5
G27.5	3284.6	3268.8	3250.4	3233.5	3213.3	3201.6	3190.6	3156.7	3126.1	3150.6
G28.0	3264.8	3248.6	3229.7	3209.9	3189.5	3176.2	3169.9	3133.7	3101.4	3121.7
G28.5	3240.3	3228.8	3209.1	3186.6	3165.2	3150.9	3145.6	3110.4	3077.0	3093.3
G29.0	3209.0	3208.6	3188.2	3163.6	3140.7	3125.1	3119.3	3087.2	3052.5	3064.9
G29.5	3178.2	3187.7	3167.4	3141.0	3116.0	3099.3	3092.3	3063.8	3027.9	3035.6
G30.0	3147.3	3158.5	3147.2	3118.2	3091.8	3073.3	3064.8	3040.6	3003.2	3006.1
G30.5	3116.5	3125.8	3127.1	3095.5	3067.9	3047.0	3037.1	3016.9	2977.8	2975.4
G31.0	3085.7	3093.8	3105.5	3073.0	3043.9	3020.6	3008.7	2993.2	2952.5	2944.3
G31.5	3054.3	3062.1	3079.7	3050.8	3019.9	2993.5	2980.1	2969.5	2926.6	2913.3
G32.0	3022.5	3030.7	3045.6	3028.9	2996.1	2966.4	2951.3	2945.8	2900.8	2882.4
G32.5	2990.4	2999.4	3011.1	3006.3	2972.1	2939.3	2922.4	2920.8	2875.1	2852.1
G33.0	2958.2	2967.5	2976.7	2984.0	2948.2	2912.9	2893.6	2891.5	2849.3	2822.1
G33.5	2925.9	2935.2	2942.5	2959.5	2924.5	2886.9	2865.2	2862.1	2823.7	2791.3
G34.0	2897.2	2902.6	2908.6	2924.5	2900.6	2861.0	2836.8	2831.5	2798.2	2759.4
G34.5	2870.6	2869.8	2875.0	2889.5	2877.1	2835.2	2807.4	2801.0	2772.8	2729.1
G35.0	2844.0	2835.9	2841.4	2854.6	2853.6	2809.4	2777.9	2770.8	2747.6	2700.5
G35.5	2817.3	2805.8	2807.7	2819.6	2830.0	2784.2	2748.1	2740.9	2722.4	2672.3
G36.0	2790.9	2778.2	2773.6	2784.7	2805.7	2759.0	2718.0	2711.1	2696.0	2645.1
G36.5	2764.7	2750.8	2739.3	2749.9	2769.4	2733.9	2690.6	2681.1	2669.7	2617.8

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 62)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G37.0	2738.6	2723.8	2705.0	2715.0	2732.3	2709.1	2664.9	2650.7	2642.8	2590.4
G37.5	2712.3	2696.9	2677.2	2680.0	2695.4	2684.6	2639.2	2618.7	2615.9	2563.1
G38.0	2686.1	2670.1	2649.5	2645.1	2658.7	2659.6	2612.8	2586.7	2590.1	2535.0
G38.5	2660.1	2643.2	2622.0	2609.8	2622.5	2634.6	2586.3	2555.4	2560.0	2507.1
G39.0	2634.1	2616.5	2594.7	2573.9	2586.6	2609.8	2560.2	2524.4	2528.9	2479.5
G39.5	2604.0	2590.1	2567.5	2541.8	2550.7	2575.2	2533.0	2493.8	2497.6	2452.0
G40.0	2573.8	2563.9	2540.4	2513.5	2514.9	2538.2	2506.2	2463.4	2465.9	2424.9
G40.5	2543.4	2537.9	2513.4	2485.3	2478.9	2501.9	2479.8	2432.9	2433.7	2398.0
G41.0	2512.0	2506.2	2486.6	2457.4	2442.6	2466.0	2453.2	2403.3	2401.6	2371.1
G41.5	2480.3	2474.2	2460.0	2429.6	2406.1	2430.1	2426.7	2375.6	2370.1	2344.2
G42.0	2448.6	2442.1	2433.6	2402.3	2370.7	2393.1	2401.4	2348.3	2338.6	2317.2
G42.5	2416.8	2410.0	2406.5	2375.2	2342.9	2355.7	2376.3	2321.1	2307.4	2290.0
G43.0	2385.1	2377.9	2373.9	2348.1	2315.7	2318.3	2351.4	2294.2	2276.2	2262.8
G43.5	2353.5	2345.5	2341.0	2321.2	2288.4	2281.4	2315.1	2267.5	2244.6	2235.4
G44.0	2322.1	2313.1	2308.0	2294.7	2260.9	2244.9	2278.6	2241.0	2212.7	2208.2
G44.5	2295.2	2280.7	2275.0	2268.6	2233.5	2208.9	2241.5	2214.9	2180.6	2181.3
G45.0	2269.4	2248.5	2242.0	2238.6	2206.6	2173.3	2204.4	2188.8	2148.2	2154.5
G45.5	2243.6	2216.4	2208.5	2204.5	2179.7	2142.8	2167.5	2162.8	2116.1	2128.6
G46.0	2217.9	2188.4	2175.2	2170.6	2152.6	2115.1	2131.0	2137.1	2085.0	2102.8
G46.5	2192.2	2162.7	2142.1	2136.8	2125.9	2087.4	2094.6	2111.5	2054.0	2070.8
G47.0	2166.7	2137.0	2109.1	2103.2	2099.4	2059.9	2058.7	2085.5	2024.6	2038.7
G47.5	2141.4	2111.4	2076.6	2070.0	2071.8	2032.7	2022.9	2059.8	1997.6	2006.4
G48.0	2116.1	2086.0	2049.6	2037.1	2037.3	2005.7	1987.2	2029.7	1970.6	1974.1
G48.5	2091.0	2060.7	2024.2	2004.6	2003.1	1978.8	1950.9	1992.5	1943.7	1942.3
G49.0	2065.9	2035.7	1998.8	1971.9	1969.9	1952.3	1914.6	1956.0	1917.1	1910.6
G49.5	2035.0	2010.8	1973.3	1939.1	1936.8	1926.0	1884.9	1920.2	1890.6	1879.3
G50.0	2002.4	1986.0	1948.1	1908.0	1903.9	1899.9	1857.3	1884.5	1864.3	1848.2
G50.5	1969.8	1961.3	1923.2	1882.6	1870.8	1874.2	1830.0	1848.6	1838.4	1817.0
G51.0	1937.2	1931.3	1898.5	1857.0	1837.7	1843.6	1803.5	1812.8	1812.7	1785.3
G51.5	1904.5	1898.3	1873.8	1831.8	1804.7	1810.4	1777.1	1777.0	1787.3	1753.5
G52.0	1871.6	1865.3	1849.2	1806.9	1771.6	1777.2	1750.9	1741.2	1762.2	1721.7
G52.5	1838.8	1832.1	1824.8	1782.4	1738.5	1743.9	1725.4	1705.7	1737.2	1690.1
G53.0	1806.1	1798.9	1792.1	1758.1	1712.9	1710.6	1700.1	1670.5	1712.4	1659.3
G53.5	1773.4	1765.7	1758.6	1734.0	1688.3	1677.0	1675.0	1635.6	1688.0	1628.8
G54.0	1740.9	1732.6	1725.4	1709.9	1664.1	1643.3	1650.1	1604.4	1657.2	1597.9
G54.5	1713.3	1699.7	1692.4	1686.2	1640.2	1609.8	1625.0	1578.5	1621.2	1566.8
G55.0	1685.9	1666.9	1659.6	1657.8	1616.3	1576.9	1591.7	1552.9	1585.8	1540.3

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 63)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G55.5	1658.6	1634.3	1627.1	1624.9	1592.7	1544.7	1558.5	1527.2	1550.7	1514.9
G56.0	1631.3	1607.3	1594.7	1592.2	1569.6	1518.7	1525.6	1501.8	1516.1	1490.2
G56.5	1604.2	1580.4	1562.2	1559.5	1546.6	1495.2	1493.1	1476.8	1481.7	1466.1
G57.0	1577.1	1553.7	1529.7	1526.8	1523.9	1471.8	1460.8	1452.1	1447.3	1442.1
G57.5	1550.1	1527.0	1500.1	1494.1	1496.7	1448.8	1428.8	1427.6	1413.2	1418.0
G58.0	1523.2	1500.5	1473.9	1461.5	1464.0	1426.1	1396.9	1403.7	1379.2	1394.4
G58.5	1496.4	1474.1	1447.6	1429.0	1431.4	1403.4	1365.0	1380.3	1345.9	1370.3
G59.0	1467.9	1447.8	1421.6	1396.4	1398.7	1381.0	1333.2	1355.0	1313.1	1346.5
G59.5	1437.2	1421.7	1395.7	1366.5	1365.7	1359.0	1306.5	1323.0	1282.9	1323.0
G60.0	1406.6	1395.9	1370.1	1341.1	1332.9	1337.1	1283.8	1291.1	1258.7	1299.6
G60.5	1376.0	1366.8	1344.6	1315.9	1300.2	1308.1	1261.4	1259.5	1235.0	1276.7
G61.0	1345.4	1336.1	1319.3	1291.0	1268.0	1275.9	1239.6	1228.0	1211.5	1253.8
G61.5	1314.7	1305.4	1294.1	1266.3	1236.5	1244.1	1218.1	1196.9	1188.3	1220.9
G62.0	1284.0	1274.9	1266.7	1241.8	1210.1	1212.7	1196.8	1166.1	1165.4	1188.3
G62.5	1253.4	1244.5	1236.3	1217.4	1186.2	1181.6	1175.9	1135.5	1143.1	1155.8
G63.0	1222.8	1214.2	1206.1	1193.2	1162.4	1150.6	1155.5	1105.1	1121.0	1123.1
G63.5	1192.7	1184.0	1176.2	1169.2	1138.8	1119.6	1134.0	1078.9	1099.5	1090.6
G64.0	1166.0	1154.0	1146.5	1141.5	1115.4	1088.6	1102.8	1057.9	1077.9	1058.5
G64.5	1139.4	1124.1	1116.8	1112.1	1092.3	1060.8	1071.6	1037.3	1047.4	1027.0
G65.0	1112.8	1096.9	1087.3	1082.8	1069.4	1037.9	1040.6	1017.1	1017.0	995.8
G65.5	1086.4	1071.3	1057.8	1053.6	1046.7	1015.2	1009.8	997.1	986.7	964.8
G66.0	1060.1	1045.8	1028.5	1024.5	1021.1	992.8	979.6	977.4	956.5	936.6
G66.5	1033.8	1020.5	1002.4	995.4	992.2	970.7	949.5	958.3	926.7	915.1
G67.0	1007.6	995.3	977.7	966.4	963.5	948.8	919.8	939.6	897.1	894.0
G67.5	981.5	970.2	953.2	937.5	934.9	927.3	894.4	911.6	868.0	873.3
G68.0	955.4	945.0	928.9	910.9	906.5	905.9	873.0	881.9	842.8	853.1
G68.5	929.8	920.0	904.7	887.5	878.3	879.3	852.0	852.3	824.4	833.1
G69.0	904.2	895.2	880.7	864.3	850.3	851.3	831.4	822.9	806.0	814.0
G69.5	878.7	870.0	856.9	841.2	822.5	823.5	810.9	793.4	788.1	795.2
G70.0	853.3	844.7	833.1	818.4	798.9	796.1	790.8	764.1	770.7	770.5
G70.5	827.9	819.5	809.0	795.7	777.0	768.7	770.9	735.5	753.3	741.5
G71.0	802.6	794.3	784.2	773.2	755.3	741.5	746.8	715.9	736.3	712.6
G71.5	777.3	769.2	759.5	750.9	733.8	714.3	719.6	696.9	709.7	684.1
G72.0	752.1	744.0	735.0	727.7	712.4	691.5	692.6	678.1	680.6	655.7
G72.5	726.9	718.9	710.5	703.6	691.2	671.0	665.9	659.5	651.9	627.7
G73.0	707.1	693.9	686.1	679.5	670.2	650.7	639.4	641.2	623.4	603.2
G73.5	687.4	670.1	661.9	655.6	648.3	630.6	613.2	623.3	595.2	587.5

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 64)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G74.0	667.8	650.9	637.7	631.7	624.7	610.8	588.6	597.6	567.5	572.1
G74.5	648.3	631.8	614.4	607.9	601.2	591.2	569.7	571.7	550.1	557.2
G75.0	628.7	612.8	595.8	584.2	577.8	571.7	551.0	546.0	533.1	542.9
G75.5	609.3	593.9	577.3	560.6	554.6	548.9	532.5	520.4	516.6	528.4
G76.0	589.8	575.0	558.9	541.8	531.4	526.0	514.2	494.9	500.3	499.4
G76.5	570.4	556.1	540.5	523.9	508.3	503.2	496.1	472.9	484.5	470.5
G77.0	550.8	537.3	522.2	506.1	487.2	480.6	477.1	455.7	459.7	442.0
G77.5	529.7	518.5	504.0	488.3	470.0	458.0	454.8	438.7	434.6	414.1
G78.0	508.6	498.2	485.7	470.7	452.8	435.6	432.6	422.1	409.6	393.0
G78.5	487.6	477.4	467.2	453.2	435.9	416.6	410.6	405.7	384.8	378.9
G79.0	466.6	456.6	446.9	435.7	418.9	400.3	388.7	387.9	363.3	365.2
G79.5	445.6	435.9	426.6	417.0	402.1	384.1	366.9	366.2	348.0	351.7
G80.0	424.6	415.3	406.3	397.0	385.3	368.0	349.1	344.6	333.1	332.3
G80.5	403.6	394.6	386.1	377.0	367.1	351.9	333.7	323.1	318.4	308.0
G81.0	382.7	374.1	366.0	357.1	347.5	336.0	318.4	301.8	303.1	283.8
G81.5	362.2	353.5	345.8	337.3	328.0	318.6	303.3	283.9	281.8	259.7
G82.0	342.5	333.6	325.7	317.5	308.6	299.6	288.3	269.6	260.7	246.8
G82.5	322.8	314.5	306.2	297.7	289.2	280.6	272.5	255.5	239.7	234.4
G83.0	303.2	295.4	287.7	278.4	269.9	261.7	253.9	241.5	220.3	222.4
G83.5	283.5	276.4	269.2	260.5	250.6	242.8	235.4	227.7	207.3	203.9
G84.0	263.9	257.3	250.7	242.7	233.3	224.1	217.0	209.9	194.5	183.5
G84.5	244.3	238.3	232.3	224.9	216.2	206.6	198.7	191.8	182.0	163.4
G85.0	224.7	219.3	213.9	207.2	199.1	190.2	180.7	173.8	167.0	149.9
G85.5	205.1	200.3	195.5	189.4	182.1	173.9	165.1	155.9	149.4	138.7
G86.0	185.1	181.2	177.2	171.7	165.1	157.7	149.6	139.8	131.9	127.6
G86.5	165.0	161.6	158.3	154.0	148.1	141.4	134.2	125.2	114.4	111.1
G87.0	144.8	142.0	139.2	135.4	130.7	125.3	118.9	110.7	100.5	94.2
G87.5	124.7	122.4	120.1	116.8	112.7	108.2	103.5	96.3	87.1	78.5
G88.0	104.5	102.8	101.0	98.3	94.7	90.9	86.8	81.6	73.8	66.1
G88.5	84.4	83.2	82.0	79.7	76.8	73.6	70.2	65.5	59.6	53.8
G89.0	64.3	63.6	62.9	61.2	58.9	56.3	53.5	49.4	44.3	40.3
G89.5	44.1	44.1	43.8	42.7	40.9	39.0	36.9	33.4	29.0	25.9
G90.0	26.7	27.2	27.5	26.9	25.6	24.2	22.6	19.4	15.3	12.9
G90.5	48.6	49.3	49.5	48.2	45.6	42.8	39.7	33.8	26.5	21.7
G91.0	51.1	51.4	51.5	49.8	47.0	43.8	40.3	34.2	26.5	21.1
G91.5	53.5	53.6	53.4	51.5	48.3	44.8	40.9	34.6	26.6	20.3
G92.0	56.0	55.8	55.3	53.1	49.7	45.8	41.6	34.9	26.2	19.4

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 65)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G92.5	58.4	58.0	57.2	54.8	51.1	46.9	42.2	34.8	25.5	18.4
G93.0	60.9	60.2	59.1	56.5	52.4	47.8	42.4	34.4	24.8	18.0
G93.5	63.4	62.4	61.0	58.2	53.6	48.5	42.6	34.2	24.2	17.7
G94.0	65.8	64.6	62.9	59.6	54.7	49.2	42.8	33.9	24.6	17.4
G94.5	68.2	66.7	64.6	61.0	55.8	49.9	43.1	34.1	24.9	16.4
G95.0	70.6	68.7	66.4	62.4	56.9	50.6	43.3	34.8	25.3	15.6
G95.5	72.9	70.8	68.2	63.9	58.0	51.3	44.3	35.5	25.2	15.3
G96.0	75.3	72.9	69.9	65.3	59.1	52.4	45.3	36.2	24.6	16.8
G96.5	77.7	75.0	71.7	66.8	60.3	53.7	46.3	36.9	24.1	18.5
G97.0	80.0	77.1	73.5	68.3	62.0	55.1	47.3	36.7	23.6	20.3
G97.5	82.4	79.2	75.3	70.1	63.7	56.5	48.4	36.6	25.4	22.3
G98.0	84.8	81.4	77.4	72.1	65.4	57.9	48.9	36.5	27.8	24.3
G98.5	87.2	83.7	79.6	74.1	67.1	59.4	49.2	36.4	30.3	26.5
G99.0	89.8	86.1	81.7	76.0	68.8	60.5	49.5	37.8	32.8	30.5
G99.5	92.4	88.5	83.9	78.0	70.6	61.2	49.9	40.7	35.5	34.5
G100.0	95.1	91.0	86.1	80.1	72.1	62.0	50.4	43.6	38.3	38.7
G100.5	97.8	93.4	88.4	82.1	73.2	62.8	51.8	46.5	41.1	42.0
G101.0	100.4	95.9	90.6	83.8	74.4	63.7	55.0	49.5	44.0	44.4
G101.5	103.1	98.4	92.9	85.3	75.6	64.6	58.3	52.7	48.1	46.8
G102.0	105.8	100.9	94.7	86.8	76.8	66.6	61.6	56.0	52.9	49.4
G102.5	108.5	103.2	96.5	88.3	78.1	70.2	64.9	59.4	57.8	53.2
G103.0	111.2	105.3	98.3	89.8	79.3	73.8	68.3	62.8	62.8	58.4
G103.5	113.6	107.4	100.1	91.4	82.4	77.5	72.0	66.3	67.7	63.7
G104.0	115.9	109.5	102.0	93.0	86.3	81.2	75.8	70.8	70.8	69.1
G104.5	118.3	111.7	103.8	94.9	90.4	84.9	79.7	76.2	74.0	74.6
G105.0	120.7	113.8	105.7	99.2	94.4	88.7	83.6	81.6	77.3	77.5
G105.5	123.1	116.0	107.6	103.6	98.5	93.0	87.6	87.0	80.6	80.5
G106.0	125.5	118.1	111.8	107.9	102.6	97.4	91.7	92.5	84.1	83.6
G106.5	127.9	120.3	116.5	112.3	106.8	101.8	97.0	98.0	89.9	86.9
G107.0	130.3	124.7	121.1	116.8	111.4	106.3	102.8	101.7	95.7	90.3
G107.5	132.7	129.7	125.8	121.2	116.2	110.8	108.6	105.5	101.7	95.6
G108.0	138.0	134.7	130.5	125.7	121.2	115.4	114.5	109.4	107.7	101.7
G108.5	143.2	139.7	135.3	130.7	126.2	120.6	120.4	113.4	113.8	108.0
G109.0	148.4	144.7	140.1	136.2	131.2	126.8	126.4	117.4	119.5	114.3
G109.5	153.7	149.8	144.9	141.6	136.3	133.1	131.7	121.6	123.3	120.8
G110.0	159.0	154.9	150.4	147.2	141.5	139.5	136.1	127.8	127.3	127.3
G110.5	164.3	160.0	156.4	152.8	147.1	145.9	140.5	134.2	131.4	132.9

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 66)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G111.0	169.7	165.4	162.5	158.4	153.8	152.4	145.0	140.7	135.7	137.2
G111.5	175.0	171.9	168.6	164.1	160.6	158.9	149.6	147.3	140.0	141.6
G112.0	180.4	178.4	174.7	169.9	167.5	165.1	154.2	153.9	144.5	146.2
G112.5	187.3	184.9	180.9	176.5	174.4	170.0	159.0	160.6	150.6	150.9
G113.0	194.3	191.5	187.1	183.6	181.4	175.0	164.8	167.1	157.8	155.7
G113.5	201.3	198.1	193.3	190.9	188.4	180.1	171.8	171.8	165.0	160.7
G114.0	208.2	204.8	200.0	198.1	195.6	185.2	178.8	176.7	172.4	165.8
G114.5	215.3	211.5	207.6	205.4	201.8	190.4	186.0	181.7	179.9	172.8
G115.0	222.3	218.2	215.2	212.8	207.3	195.7	193.2	186.8	187.5	180.6
G115.5	229.4	225.4	222.9	220.2	212.9	201.1	200.6	192.1	195.3	188.6
G116.0	236.5	233.4	230.7	227.6	218.5	207.8	208.0	197.5	203.2	196.7
G116.5	243.6	241.3	238.5	234.6	224.3	215.4	215.5	203.0	208.8	204.9
G117.0	251.6	249.3	246.3	240.6	230.1	223.0	221.5	210.0	214.4	213.3
G117.5	259.8	257.3	254.1	246.7	236.0	230.8	227.3	218.3	220.2	221.8
G118.0	268.0	265.4	262.0	252.9	242.0	238.6	233.3	226.7	226.1	230.6
G118.5	276.2	273.5	269.0	259.1	248.7	246.5	239.3	235.2	232.2	239.4
G119.0	284.5	281.6	275.5	265.3	256.8	254.6	245.5	243.9	238.4	248.4
G119.5	292.7	289.7	282.1	271.6	264.9	262.7	251.9	252.6	244.8	254.7
G120.0	301.0	297.4	288.7	278.0	273.1	270.4	258.3	261.6	251.4	261.0
G120.5	309.2	304.2	295.3	284.6	281.5	277.0	264.9	270.7	258.0	267.5
G121.0	317.6	311.1	302.0	292.3	289.8	283.7	272.6	280.0	266.8	274.1
G121.5	325.3	318.1	308.8	300.8	298.2	290.5	281.8	287.4	276.3	280.9
G122.0	332.5	325.1	315.6	309.3	306.7	297.5	291.1	294.3	286.0	287.8
G122.5	339.7	332.2	322.5	317.9	315.1	304.5	300.6	301.3	295.9	294.9
G123.0	347.0	339.2	330.4	326.5	322.8	311.6	310.2	308.5	305.9	302.1
G123.5	354.3	346.4	339.2	335.2	329.9	318.8	319.8	315.8	316.2	309.4
G124.0	361.6	353.6	348.0	344.0	337.1	326.1	329.7	323.2	326.5	316.9
G124.5	369.0	360.8	356.8	352.9	344.4	334.3	339.6	330.7	337.1	324.5
G125.0	376.4	369.6	365.7	361.8	351.7	344.2	349.7	338.4	347.8	332.2
G125.5	383.8	378.4	374.6	370.0	359.1	354.1	359.9	346.1	358.6	340.4
G126.0	391.3	387.3	383.5	377.4	366.6	364.1	367.7	354.0	369.6	350.1
G126.5	400.2	396.1	392.5	384.9	374.1	374.2	375.4	363.5	378.9	359.8
G127.0	409.2	405.1	401.5	392.4	381.8	384.3	383.3	374.3	386.6	369.8
G127.5	418.2	414.1	410.4	400.0	389.7	394.4	391.2	385.1	394.3	379.8
G128.0	427.2	423.0	417.8	407.6	399.8	404.6	399.3	396.2	402.2	390.0
G128.5	436.3	432.1	425.3	415.2	409.8	414.8	407.4	407.3	410.1	400.3
G129.0	445.3	441.1	432.8	422.9	419.9	424.9	415.6	418.5	418.2	410.5

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 67)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G129.5	454.3	449.6	440.3	430.7	430.0	434.2	424.0	429.8	426.4	420.7
G130.0	463.3	457.0	447.9	438.4	440.1	442.2	432.4	441.2	434.6	431.0
G130.5	472.3	464.4	455.5	447.8	450.3	450.2	440.8	452.7	443.1	441.1
G131.0	481.0	471.8	463.1	457.8	460.5	458.3	449.9	464.2	451.5	451.4
G131.5	488.2	479.2	470.8	467.7	470.8	466.5	461.0	475.7	460.1	461.6
G132.0	495.5	486.7	478.4	477.6	481.0	474.7	472.1	487.1	468.8	472.0
G132.5	502.7	494.2	486.5	487.5	491.1	483.1	483.2	496.4	477.5	482.3
G133.0	510.0	501.7	496.1	497.4	499.4	491.4	494.2	504.4	486.2	492.7
G133.5	517.3	509.1	505.6	507.2	507.4	499.8	505.2	512.4	495.8	503.1
G134.0	524.7	516.6	515.1	517.1	515.5	508.3	516.3	520.4	506.1	513.5
G134.5	532.0	524.7	524.6	526.9	523.6	516.8	527.4	528.5	516.3	522.0
G135.0	539.3	533.9	534.2	536.8	531.7	526.1	538.5	536.5	526.3	530.6
G135.5	546.6	543.2	543.6	545.7	539.9	537.0	549.7	544.6	536.2	539.0
G136.0	554.3	552.4	553.1	553.6	548.2	547.8	560.8	552.7	546.1	547.4
G136.5	563.0	561.7	562.5	561.5	556.4	558.7	571.8	560.7	555.9	555.7
G137.0	571.8	571.0	572.0	569.3	564.6	569.5	582.8	568.8	565.6	563.9
G137.5	580.6	580.2	581.2	577.2	572.9	580.2	590.3	576.9	575.1	572.2
G138.0	589.4	589.3	589.1	585.2	581.2	590.9	598.0	585.1	584.6	580.4
G138.5	598.2	598.4	596.7	593.1	591.1	601.6	605.6	593.4	593.9	588.6
G139.0	607.0	607.5	604.3	601.1	601.4	612.2	613.1	601.5	603.2	596.6
G139.5	615.9	616.3	612.0	609.0	611.6	622.8	620.6	610.2	612.4	604.7
G140.0	624.6	623.7	619.7	617.0	621.9	633.3	628.1	619.0	621.6	612.6
G140.5	633.4	631.1	627.4	625.0	632.1	643.6	635.6	627.8	630.7	620.6
G141.0	642.1	638.5	635.1	633.8	642.2	653.1	643.2	636.6	639.6	628.4
G141.5	649.5	646.0	642.8	643.6	652.2	660.0	650.6	645.4	648.4	636.3
G142.0	656.8	653.4	650.6	653.3	662.3	667.0	658.1	654.0	657.0	644.0
G142.5	664.1	660.9	658.4	662.8	672.2	673.9	665.6	662.4	664.2	651.7
G143.0	671.4	668.3	666.2	672.4	682.1	680.8	673.0	670.8	671.2	659.3
G143.5	678.7	675.8	675.8	681.8	692.0	687.7	680.4	679.0	678.2	666.9
G144.0	686.1	683.3	685.3	691.3	701.8	694.5	687.7	687.2	685.1	674.3
G144.5	693.5	690.8	694.7	700.7	708.3	701.3	695.3	695.2	692.0	681.8
G145.0	700.7	698.9	703.8	710.3	714.6	708.1	702.9	703.1	698.8	689.1
G145.5	708.0	707.9	712.8	719.9	720.7	714.8	710.5	710.8	705.6	696.4
G146.0	715.3	717.1	721.9	729.6	726.9	721.6	718.1	718.5	712.2	704.1
G146.5	722.9	726.1	730.9	739.2	733.1	728.3	725.4	726.2	718.8	712.2
G147.0	731.6	735.2	739.8	745.7	739.4	735.0	732.6	733.6	725.4	720.2
G147.5	740.2	744.2	748.8	751.6	745.6	741.8	739.7	741.0	731.9	728.1

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 68)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G148.0	748.9	752.8	757.9	757.6	751.9	748.4	746.7	747.2	738.3	735.9
G148.5	757.5	761.4	767.0	763.3	758.2	754.9	753.6	753.0	744.7	743.6
G149.0	766.0	770.0	774.0	769.1	764.5	761.4	760.4	758.7	751.0	751.1
G149.5	774.3	778.5	779.8	775.0	770.9	767.7	767.1	764.5	757.0	758.4
G150.0	782.7	787.1	785.4	780.7	777.3	774.1	773.7	770.1	763.2	765.7
G150.5	791.0	794.7	791.0	786.5	783.7	780.4	780.2	775.7	769.2	772.8
G151.0	799.1	800.0	796.6	792.2	789.7	786.8	786.6	781.2	775.1	779.8
G151.5	807.4	805.3	802.2	798.0	795.5	793.2	793.0	786.6	781.0	786.6
G152.0	813.7	810.6	807.6	803.8	801.2	799.3	799.0	792.1	786.8	793.4
G152.5	818.8	815.9	813.1	809.5	806.7	805.4	804.2	797.5	792.5	800.0
G153.0	823.8	821.2	818.6	815.2	812.0	811.2	809.3	802.9	798.8	806.6
G153.5	828.8	826.4	824.0	820.8	817.4	816.8	814.3	808.3	805.3	813.2
G154.0	833.9	831.5	829.2	826.2	822.9	822.3	819.1	813.7	811.9	819.7
G154.5	838.9	836.8	834.4	831.4	828.4	827.7	823.8	819.1	818.3	826.0
G155.0	843.9	842.0	839.2	836.3	833.9	833.0	828.3	824.2	824.6	832.3
G155.5	848.9	847.1	843.8	841.1	839.3	837.3	832.9	829.4	830.9	838.4
G156.0	853.9	852.1	848.5	845.8	844.5	841.7	837.3	834.2	836.8	844.3
G156.5	859.0	856.1	853.0	850.3	849.5	846.2	841.7	839.0	842.8	850.1
G157.0	864.0	860.2	857.3	855.0	854.1	850.4	846.1	843.7	848.3	855.7
G157.5	868.5	864.2	861.6	859.6	858.5	854.6	850.5	848.3	853.7	860.9
G158.0	872.1	868.2	865.8	864.2	862.2	858.7	854.9	853.6	858.8	866.0
G158.5	875.7	872.3	869.8	868.7	865.9	862.5	859.3	858.7	863.9	870.9
G159.0	879.3	876.2	873.9	873.0	869.6	866.5	863.7	863.8	868.9	875.7
G159.5	882.8	880.1	877.9	876.6	873.2	870.2	867.8	869.1	873.9	880.5
G160.0	886.2	884.0	882.0	879.7	876.8	874.0	872.0	874.2	878.9	885.3
G160.5	889.6	887.7	886.0	883.0	880.4	877.7	876.0	879.1	883.8	890.1
G161.0	892.9	891.3	889.6	886.2	883.8	881.4	880.4	883.9	888.5	894.7
G161.5	896.1	894.8	892.5	889.4	887.1	885.1	884.9	888.4	893.1	899.0
G162.0	899.5	898.1	895.4	892.6	890.5	888.7	889.4	892.7	897.5	902.8
G162.5	902.7	900.8	898.4	895.8	893.7	892.3	893.8	897.0	901.6	906.5
G163.0	905.8	903.5	901.3	899.0	897.0	896.0	898.1	901.3	905.8	910.1
G163.5	908.3	906.0	904.1	902.0	900.2	899.9	902.3	905.6	909.8	913.7
G164.0	910.8	908.7	906.9	905.1	903.4	903.8	906.3	909.6	913.9	917.2
G164.5	913.3	911.3	909.8	908.2	906.6	907.8	910.1	913.5	917.7	920.7
G165.0	915.9	913.9	912.5	911.2	910.3	911.6	913.9	917.2	921.3	923.9
G165.5	918.4	916.6	915.2	914.1	914.1	915.4	917.7	920.8	924.9	927.1
G166.0	920.8	919.1	917.9	917.0	917.8	919.2	921.4	924.4	928.0	930.1

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 69)

Unit: cd

G\C	C300.0	C305.0	C310.0	C315.0	C320.0	C325.0	C330.0	C335.0	C340.0	C345.0
G166.5	923.3	921.7	920.6	920.4	921.3	922.9	925.1	928.0	931.1	933.2
G167.0	925.8	924.3	923.2	923.8	924.8	926.4	928.6	931.6	934.2	936.1
G167.5	928.3	926.9	926.3	927.0	928.1	929.8	932.1	934.9	937.1	939.1
G168.0	930.8	929.7	929.6	930.2	931.4	933.1	935.3	938.2	939.9	942.0
G168.5	933.4	932.9	932.9	933.4	934.5	936.2	938.5	941.1	942.7	944.7
G169.0	936.5	936.1	936.1	936.7	937.7	939.3	941.5	943.7	945.3	947.3
G169.5	939.5	939.3	939.3	939.9	940.9	942.4	944.4	946.2	948.0	949.9
G170.0	942.6	942.4	942.5	943.1	944.1	945.5	947.5	948.7	950.4	952.4
G170.5	945.4	945.4	945.7	946.2	947.2	948.7	950.2	951.3	952.8	954.8
G171.0	948.2	948.5	948.8	949.4	950.3	951.7	952.7	953.9	955.3	957.0
G171.5	951.1	951.4	951.8	952.5	953.4	954.5	955.3	956.3	957.7	959.4
G172.0	953.9	954.1	954.8	955.5	956.6	957.2	957.9	958.8	960.2	961.7
G172.5	956.5	956.9	957.6	958.4	959.3	959.7	960.4	961.3	962.6	964.0
G173.0	959.2	959.6	960.3	961.2	961.6	962.2	962.9	963.8	965.0	966.4
G173.5	961.8	962.2	962.9	963.4	964.0	964.6	965.3	966.2	967.3	968.7
G174.0	964.4	964.8	965.1	965.6	966.2	967.0	967.8	968.6	969.7	970.9
G174.5	966.6	967.0	967.3	967.9	968.5	969.1	970.0	971.0	972.1	973.2
G175.0	968.7	969.1	969.6	970.0	970.7	971.4	972.2	973.1	974.1	975.4
G175.5	970.8	971.2	971.7	972.2	972.7	973.4	974.3	975.2	976.2	977.3
G176.0	973.0	973.3	973.7	974.3	974.9	975.5	976.3	977.1	978.1	979.2
G176.5	975.1	975.4	975.8	976.3	976.8	977.5	978.2	979.0	979.8	980.8
G177.0	977.2	977.5	977.9	978.3	978.8	979.4	980.0	980.7	981.5	982.4
G177.5	979.4	979.6	979.9	980.3	980.8	981.3	981.8	982.4	983.1	983.8
G178.0	981.5	981.7	981.9	982.3	982.6	983.1	983.5	984.1	984.6	985.3
G178.5	983.7	983.8	984.0	984.2	984.5	984.8	985.1	985.5	986.0	986.4
G179.0	986.0	986.0	986.1	986.2	986.4	986.6	986.8	987.1	987.3	987.6
G179.5	988.2	988.2	988.2	988.3	988.4	988.5	988.6	988.7	988.9	989.0
G180.0	991.7	991.7	991.7	991.7	991.7	991.7	991.7	991.7	991.7	991.7

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 70)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G0.0	4005.0	4005.0	4005.0							
G0.5	4003.6	4004.6	4005.7							
G1.0	4002.5	4004.3	4006.4							
G1.5	3997.4	4000.0	4002.5							
G2.0	3992.0	3995.3	3998.9							
G2.5	3987.4	3991.7	3995.6							
G3.0	3983.0	3987.7	3992.8							
G3.5	3979.4	3985.2	3991.3							
G4.0	3976.2	3983.0	3989.9							
G4.5	3970.8	3978.0	3985.6							
G5.0	3965.4	3973.3	3981.6							
G5.5	3958.2	3966.5	3975.1							
G6.0	3950.6	3959.3	3968.6							
G6.5	3943.1	3952.1	3962.2							
G7.0	3935.2	3945.2	3956.0							
G7.5	3927.2	3937.7	3949.2							
G8.0	3919.3	3930.5	3942.7							
G8.5	3910.0	3921.5	3934.1							
G9.0	3900.6	3912.5	3925.8							
G9.5	3889.1	3900.2	3913.2							
G10.0	3876.5	3887.6	3900.6							
G10.5	3863.5	3875.0	3888.7							
G11.0	3850.6	3862.8	3876.8							
G11.5	3838.3	3850.9	3866.0							
G12.0	3826.1	3839.4	3855.2							
G12.5	3812.4	3825.4	3840.8							
G13.0	3798.4	3811.3	3826.4							
G13.5	3783.2	3795.5	3811.0							
G14.0	3767.4	3779.6	3795.1							
G14.5	3751.2	3763.8	3780.0							
G15.0	3735.4	3748.3	3765.2							
G15.5	3718.8	3731.8	3748.3							
G16.0	3702.2	3715.2	3731.8							
G16.5	3685.0	3696.5	3712.3							
G17.0	3666.2	3677.4	3693.2							
G17.5	3647.2	3657.2	3672.7							
G18.0	3627.4	3637.4	3652.6							

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 71)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G18.5	3607.6	3617.6	3633.1							
G19.0	3587.7	3597.7	3613.7							
G19.5	3567.7	3577.3	3592.9							
G20.0	3547.3	3556.7	3572.4							
G20.5	3526.4	3534.4	3549.1							
G21.0	3504.6	3511.7	3525.7							
G21.5	3482.5	3488.6	3502.4							
G22.0	3459.5	3465.3	3479.0							
G22.5	3436.5	3442.2	3456.2							
G23.0	3413.4	3419.2	3433.4							
G23.5	3390.3	3396.0	3410.2							
G24.0	3367.4	3372.8	3387.0							
G24.5	3344.3	3347.9	3360.2							
G25.0	3320.7	3322.8	3333.5							
G25.5	3296.9	3296.2	3306.0							
G26.0	3271.0	3269.4	3278.3							
G26.5	3245.1	3243.2	3253.3							
G27.0	3217.3	3217.2	3228.2							
G27.5	3188.6	3191.5	3202.5							
G28.0	3161.2	3166.0	3176.8							
G28.5	3133.6	3139.1	3147.7							
G29.0	3105.6	3111.7	3118.6							
G29.5	3077.4	3083.3	3088.8							
G30.0	3047.1	3054.6	3059.0							
G30.5	3016.8	3025.9	3030.7							
G31.0	2985.8	2997.3	3002.5							
G31.5	2954.8	2969.0	2973.9							
G32.0	2924.7	2940.9	2945.4							
G32.5	2894.8	2912.4	2915.1							
G33.0	2864.5	2883.9	2884.8							
G33.5	2834.1	2854.3	2854.0							
G34.0	2802.2	2824.5	2823.2							
G34.5	2770.1	2794.5	2793.3							
G35.0	2738.1	2764.4	2763.6							
G35.5	2706.1	2734.8	2732.8							
G36.0	2674.6	2705.4	2701.9							
G36.5	2643.2	2675.5	2669.9							

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 72)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G37.0	2611.0	2645.3	2637.8							
G37.5	2578.5	2614.8	2607.4							
G38.0	2546.0	2584.1	2576.9							
G38.5	2513.5	2554.2	2547.4							
G39.0	2481.6	2524.6	2517.8							
G39.5	2450.1	2495.3	2486.6							
G40.0	2418.4	2466.2	2455.4							
G40.5	2386.7	2436.4	2422.9							
G41.0	2354.2	2406.1	2390.5							
G41.5	2321.2	2375.5	2359.8							
G42.0	2288.2	2344.4	2329.1							
G42.5	2255.5	2314.2	2299.1							
G43.0	2223.3	2284.3	2269.3							
G43.5	2191.8	2255.0	2237.3							
G44.0	2160.0	2226.0	2205.3							
G44.5	2127.5	2196.2	2173.2							
G45.0	2094.8	2165.8	2141.0							
G45.5	2062.4	2133.6	2110.9							
G46.0	2033.8	2100.9	2080.8							
G46.5	2006.1	2069.0	2051.9							
G47.0	1978.5	2037.9	2022.9							
G47.5	1951.5	2007.2	1993.0							
G48.0	1924.6	1977.0	1963.1							
G48.5	1897.6	1946.3	1932.2							
G49.0	1870.6	1915.2	1901.2							
G49.5	1843.0	1883.8	1871.6							
G50.0	1815.5	1852.0	1842.1							
G50.5	1788.4	1820.8	1813.0							
G51.0	1761.4	1790.2	1783.9							
G51.5	1735.1	1759.7	1754.4							
G52.0	1708.8	1729.4	1725.0							
G52.5	1682.7	1698.9	1696.0							
G53.0	1656.9	1668.5	1667.0							
G53.5	1631.0	1638.2	1638.7							
G54.0	1605.2	1608.4	1610.5							
G54.5	1579.8	1578.8	1582.2							
G55.0	1554.6	1549.4	1554.0							

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 73)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G55.5	1530.0	1520.0	1526.2							
G56.0	1505.9	1490.4	1498.4							
G56.5	1481.7	1460.9	1471.0							
G57.0	1457.3	1431.8	1443.6							
G57.5	1427.7	1402.8	1416.5							
G58.0	1397.3	1374.1	1389.3							
G58.5	1367.2	1345.5	1362.5							
G59.0	1337.7	1316.9	1335.7							
G59.5	1308.3	1288.3	1308.9							
G60.0	1279.1	1259.7	1282.1							
G60.5	1249.8	1231.3	1256.4							
G61.0	1220.4	1203.7	1230.7							
G61.5	1190.9	1176.2	1205.0							
G62.0	1162.2	1148.8	1179.4							
G62.5	1133.6	1121.3	1152.8							
G63.0	1105.6	1092.8	1126.2							
G63.5	1077.5	1064.2	1099.9							
G64.0	1048.8	1038.5	1073.5							
G64.5	1019.4	1014.6	1048.0							
G65.0	996.6	991.7	1022.6							
G65.5	974.1	968.7	997.6							
G66.0	952.1	946.3	972.6							
G66.5	930.9	923.9	948.0							
G67.0	909.8	901.6	923.3							
G67.5	889.3	879.5	898.7							
G68.0	869.1	857.8	874.1							
G68.5	849.1	836.2	849.7							
G69.0	829.4	815.3	825.4							
G69.5	810.1	794.6	801.4							
G70.0	780.9	774.4	777.5							
G70.5	750.6	754.4	753.8							
G71.0	720.9	734.5	730.2							
G71.5	691.3	714.9	706.8							
G72.0	661.8	695.1	683.3							
G72.5	632.1	668.0	660.3							
G73.0	602.3	640.7	637.3							
G73.5	578.3	613.3	614.5							

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 74)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G74.0	561.1	585.6	591.7							
G74.5	544.5	557.7	567.9							
G75.0	528.3	530.0	544.0							
G75.5	513.0	502.7	519.4							
G76.0	498.3	475.7	494.9							
G76.5	472.0	449.0	471.9							
G77.0	443.6	432.3	448.9							
G77.5	415.5	417.2	426.8							
G78.0	388.2	402.6	404.7							
G78.5	367.0	389.0	382.5							
G79.0	355.7	375.9	360.3							
G79.5	345.1	361.1	338.4							
G80.0	335.2	333.5	316.5							
G80.5	313.6	306.2	296.2							
G81.0	287.0	278.9	276.0							
G81.5	260.6	254.9	258.0							
G82.0	243.2	246.7	240.1							
G82.5	232.8	239.0	222.9							
G83.0	223.1	228.8	205.8							
G83.5	200.9	202.6	189.1							
G84.0	176.9	175.9	172.3							
G84.5	159.3	168.9	156.3							
G85.0	149.8	166.4	140.4							
G85.5	137.8	137.7	125.5							
G86.0	117.4	116.8	110.6							
G86.5	99.5	113.9	97.2							
G87.0	90.5	85.0	83.7							
G87.5	79.1	75.5	70.4							
G88.0	62.4	58.0	57.0							
G88.5	48.6	46.6	45.8							
G89.0	37.9	32.8	34.6							
G89.5	25.0	22.8	26.3							
G90.0	12.7	11.4	20.0							
G90.5	20.4	16.7	40.5							
G91.0	18.8	13.1	36.6							
G91.5	17.0	10.0	34.8							
G92.0	15.5	7.5	33.0							

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 75)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G92.5	14.3	7.1	33.1							
G93.0	12.7	7.3	33.1							
G93.5	11.0	8.8	33.7							
G94.0	11.0	8.6	34.2							
G94.5	11.6	9.8	35.4							
G95.0	12.4	11.9	36.5							
G95.5	13.3	12.3	37.5							
G96.0	15.2	13.1	38.6							
G96.5	17.9	16.2	39.9							
G97.0	20.5	19.6	41.1							
G97.5	21.5	21.0	42.5							
G98.0	22.7	22.1	43.8							
G98.5	25.0	23.3	45.1							
G99.0	29.1	27.2	46.5							
G99.5	33.4	31.7	48.7							
G100.0	37.0	36.5	50.9							
G100.5	38.9	41.5	54.1							
G101.0	40.9	44.2	57.4							
G101.5	43.1	46.6	61.0							
G102.0	47.2	49.1	64.7							
G102.5	52.4	51.8	68.6							
G103.0	57.8	54.6	72.6							
G103.5	63.2	57.7	77.3							
G104.0	68.3	62.6	82.0							
G104.5	71.2	67.6	87.4							
G105.0	74.2	72.7	92.8							
G105.5	77.4	77.9	97.8							
G106.0	80.7	83.2	102.7							
G106.5	84.1	88.6	107.2							
G107.0	89.0	94.1	111.8							
G107.5	95.3	99.6	116.5							
G108.0	101.7	105.3	121.2							
G108.5	108.1	109.6	126.2							
G109.0	114.8	113.9	131.1							
G109.5	121.5	118.3	136.4							
G110.0	128.4	122.9	141.6							
G110.5	135.0	127.5	147.2							

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 76)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G111.0	139.3	132.4	152.7							
G111.5	143.8	137.3	158.5							
G112.0	148.3	142.3	164.2							
G112.5	153.0	147.4	170.1							
G113.0	157.8	152.6	175.9							
G113.5	162.8	157.9	181.9							
G114.0	167.8	163.3	187.9							
G114.5	173.1	168.8	194.1							
G115.0	178.4	174.5	200.3							
G115.5	184.0	180.2	206.9							
G116.0	191.3	186.2	213.4							
G116.5	198.6	192.6	220.2							
G117.0	206.1	200.1	226.9							
G117.5	213.7	207.5	233.8							
G118.0	221.4	215.1	240.8							
G118.5	229.2	222.7	248.1							
G119.0	237.3	230.5	255.4							
G119.5	245.5	238.4	262.9							
G120.0	253.8	246.6	270.4							
G120.5	262.3	254.8	278.1							
G121.0	270.8	263.2	285.9							
G121.5	279.5	271.7	294.0							
G122.0	288.3	280.4	302.1							
G122.5	297.3	289.2	310.6							
G123.0	306.3	298.1	319.1							
G123.5	313.8	307.1	327.8							
G124.0	321.4	316.3	336.4							
G124.5	329.1	325.6	345.1							
G125.0	337.0	335.0	353.8							
G125.5	345.1	344.6	362.8							
G126.0	353.2	354.3	371.8							
G126.5	361.4	364.1	381.1							
G127.0	369.7	374.1	390.4							
G127.5	378.2	384.0	399.8							
G128.0	386.7	394.1	409.2							
G128.5	395.3	404.1	418.9							
G129.0	404.0	414.3	428.6							

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 77)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G129.5	412.8	424.5	438.5							
G130.0	421.7	434.9	448.5							
G130.5	430.7	445.4	458.5							
G131.0	439.7	455.9	468.6							
G131.5	448.8	466.4	478.3							
G132.0	457.8	476.9	488.0							
G132.5	466.9	487.2	497.9							
G133.0	475.9	497.5	507.9							
G133.5	484.9	507.7	517.7							
G134.0	494.0	517.9	527.5							
G134.5	503.1	528.1	537.5							
G135.0	513.3	538.2	547.5							
G135.5	523.7	547.8	557.5							
G136.0	534.1	557.3	567.5							
G136.5	544.4	566.7	576.9							
G137.0	554.6	576.0	586.3							
G137.5	564.6	585.0	595.5							
G138.0	574.5	594.0	604.8							
G138.5	584.2	603.0	613.7							
G139.0	594.0	612.0	622.5							
G139.5	603.6	620.8	631.2							
G140.0	613.1	629.5	639.9							
G140.5	622.4	638.1	648.8							
G141.0	631.5	646.5	657.6							
G141.5	640.6	654.9	666.4							
G142.0	649.6	663.2	675.2							
G142.5	658.5	671.3	683.7							
G143.0	667.2	679.4	692.3							
G143.5	675.9	687.4	700.6							
G144.0	684.3	695.3	708.9							
G144.5	692.8	703.0	716.8							
G145.0	701.1	710.7	724.7							
G145.5	709.2	718.2	732.3							
G146.0	717.3	725.7	739.8							
G146.5	725.3	733.0	747.8							
G147.0	733.1	740.4	755.7							
G147.5	740.9	747.6	763.1							

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 78)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G148.0	748.5	754.7	770.5							
G148.5	756.0	761.7	776.8							
G149.0	763.3	768.6	783.2							
G149.5	770.5	775.5	789.8							
G150.0	777.5	782.2	796.4							
G150.5	784.5	788.6	803.2							
G151.0	791.2	795.0	810.0							
G151.5	797.9	801.3	816.4							
G152.0	804.5	807.4	822.9							
G152.5	810.9	813.4	828.8							
G153.0	817.3	819.5	834.7							
G153.5	823.4	825.3	840.4							
G154.0	829.2	831.2	846.2							
G154.5	835.1	837.1	851.9							
G155.0	840.8	842.9	857.6							
G155.5	846.4	848.7	863.3							
G156.0	851.8	854.5	868.9							
G156.5	857.0	859.9	874.3							
G157.0	862.0	865.2	879.7							
G157.5	866.9	870.2	884.7							
G158.0	871.5	875.0	889.7							
G158.5	876.0	879.7	894.3							
G159.0	880.4	884.2	898.8							
G159.5	884.6	888.4	903.1							
G160.0	888.9	892.6	907.4							
G160.5	893.1	896.7	911.6							
G161.0	897.2	900.7	915.8							
G161.5	901.3	904.7	919.5							
G162.0	905.3	908.7	923.1							
G162.5	909.1	912.5	926.7							
G163.0	912.7	916.3	930.3							
G163.5	916.3	919.9	933.9							
G164.0	919.9	923.4	937.4							
G164.5	923.3	926.7	940.6							
G165.0	926.6	929.9	943.7							
G165.5	929.8	933.1	946.7							
G166.0	932.9	936.2	949.7							

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector:

Candlepower Table (Continue 79)

Unit: cd

G\C	C350.0	C355.0	C360.0							
G166.5	935.9	939.1	952.5							
G167.0	938.8	942.0	955.4							
G167.5	941.6	944.6	957.7							
G168.0	944.4	947.3	960.0							
G168.5	947.1	949.9	961.8							
G169.0	949.7	952.5	963.6							
G169.5	952.3	955.0	965.8							
G170.0	954.7	957.3	968.1							
G170.5	957.0	959.5	970.7							
G171.0	959.2	961.7	973.2							
G171.5	961.4	963.7	975.4							
G172.0	963.5	965.7	977.6							
G172.5	965.8	967.8	978.8							
G173.0	968.0	969.9	980.1							
G173.5	970.2	971.9	981.2							
G174.0	972.3	974.0	982.3							
G174.5	974.5	976.1	984.0							
G175.0	976.7	978.1	985.6							
G175.5	978.6	979.9	987.1							
G176.0	980.4	981.6	988.5							
G176.5	981.8	982.9	989.1							
G177.0	983.3	984.2	989.8							
G177.5	984.6	985.4	990.0							
G178.0	985.9	986.6	990.3							
G178.5	986.9	987.4	990.7							
G179.0	988.0	988.2	991.2							
G179.5	989.1	989.4	991.4							
G180.0	991.7	991.7	991.7							

C Plane (°):0.0-360.0: 5.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:0.5
Test Device:
Distance:
Humidity:
Inspector: