



WL9001 | LINEAR WALL SCONCE

Project: _____ Type: _____

Name: _____ Date: _____



Size	See Dimensions	Lumens	232lm, 725lm, 464lm, 1015lm
Watts	8W, 16W, 25W, 35W	CCT	3000K
Voltage	90-264V	IP Rating	IP54
Dimming	Non-Dimming	Materials	Aluminum, Acrylic
Beam Angle	140°	Finish	Black
CRI	80	Lens	Frosted
PF	0.95	Lifespan	20,000 Hours

OVERVIEW

Applications: IP54

Efficacy: 100lm/W

Dimming: Non-Dimming

LED Type: SMD

Operating Temp: 5° to 122°F

Operating Humidity: 10% - 90%RH

Lifespan: 20,000 Hours

Warranty: 2 Years

FEATURES

- Protected from the elements with an IP65 rating making it suitable for rainy environments
- Available in 4 different sizes and wattages
- Offers warm white 3000K light with a 140° beam spread




The SARIN Linear Wall Sconce is a modern, outdoor wall sconce that adds functional lighting and brilliance to any area. Constructed from solid aluminum, this fixture boasts a sleek look with a black finish. Designed to create an elegant ambiance, the energy-efficient wall light casts a gentle glow of halo effect from the slimline bar. This minimalist LED wall light can be installed horizontally or vertically, so that it's easy to adjust it to suit different interior designs.

With an IP54 rating, these sconces are safe to use in wet locations that come in direct contact with rain and water. This decorative LED wall sconce is ideal for any exterior wall on hotels, homes, and offices.



PHOTOMETRICS:

8W

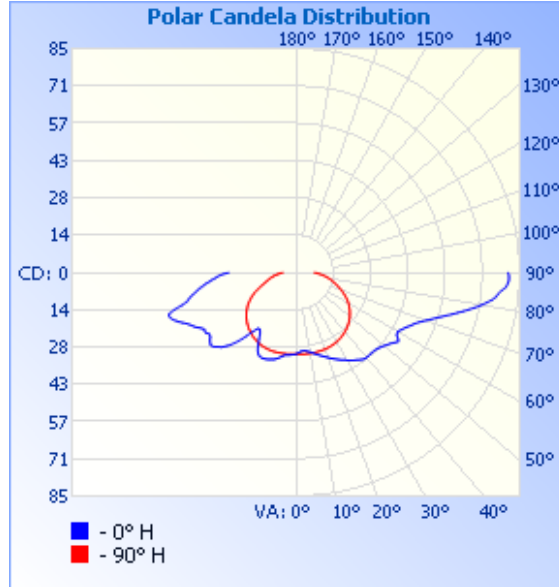

Illuminance at a Distance

	Center Beam fc	Beam Width	
1.7ft	10.7 fc	1.8 ft	3.9 ft
3.3ft	2.84 fc	3.5 ft	7.6 ft
5.0ft	1.24 fc	5.2 ft	11.5 ft
6.7ft	0.69 fc	7.0 ft	15.3 ft
8.3ft	0.45 fc	8.7 ft	19.0 ft
10.0ft	0.31 fc	10.5 ft	22.9 ft

■ Vert. Spread: 55.4°
■ Horiz. Spread: 97.7°

IMPORTANT SAFEGUARDS:

1. Installation, service and maintenance should be performed by a qualified licensed electrician.
2. Make all electrical and grounded connections in accordance with national electrical code and any applicable local code requirements.
3. Disconnect power at fuse or circuit breaker before installing or servicing.
4. Review the diagrams thoroughly before beginning.
5. Do not mount in hazardous locations, or near gas or electric heaters.
6. Do not let power cords touch hot surfaces.
7. Equipment should be mounted in locations where it will not be subjected to tampering by unauthorized personnel.
8. Do not use equipment for other than its intended use.




WL9001 | LINEAR WALL SCNCE

Project: _____ Type: _____


Name: _____ Date: _____

DIMENSIONS:


8W

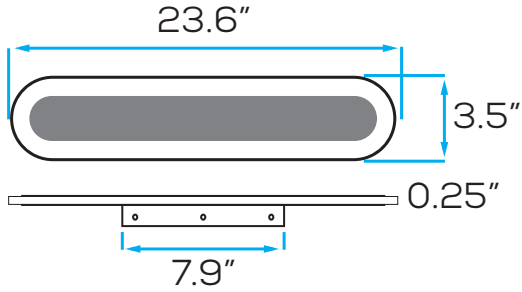


16W

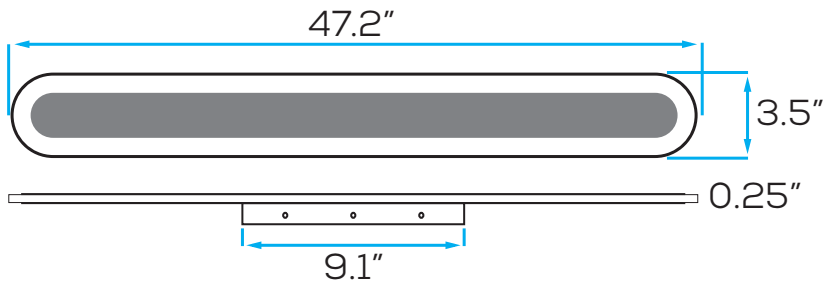

25W

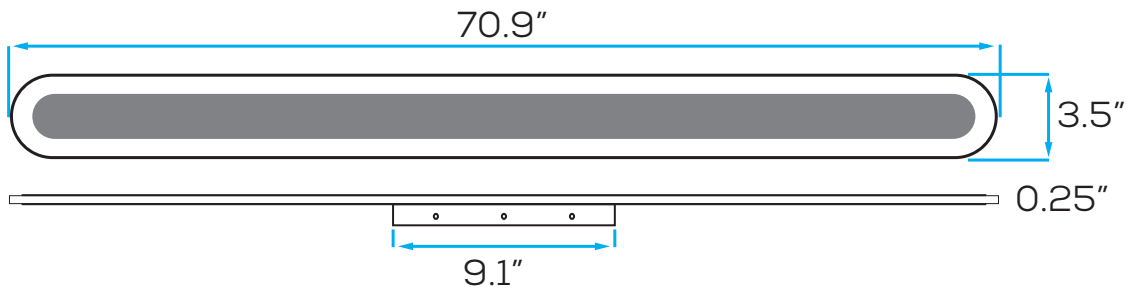

35W

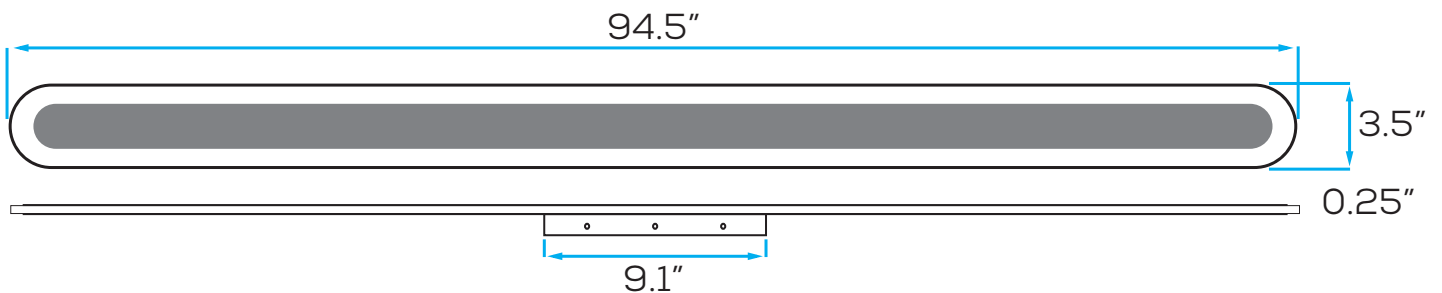



WL9001 | LINEAR WALL SCNCE

Project: _____ Type: _____

Name: _____ Date: _____

ORDER FORM:

(*) Special Order/Not Commonly Stocked

Custom Model Assembly

	Fixture	CCT	Watts	Beam Angle	Voltage
<input checked="" type="checkbox"/> WL9001	<input checked="" type="checkbox"/> 3000K	<input type="checkbox"/> 8W	<input checked="" type="checkbox"/> 140°	<input checked="" type="checkbox"/> 90-264V	
		<input type="checkbox"/> 16W			
		<input type="checkbox"/> 25W			
		<input type="checkbox"/> 35W			

SES-WL9001-3000-8
Example Model Number

SES - WL9001 - 3000K - 140° - 90-264V

Quantity	Fixture	CCT	Watts	Beam Angle	Voltage
----------	---------	-----	-------	------------	---------

Common Stock Models:

Item #	Model #
11260	SES-WL9001-3000-8
11261	SES-WL9001-3000-16
11262	SES-WL9001-3000-25
11263	SES-WL9001-3000-35

Optional Accessories:

Item #	Model #
41260-B	SES-WL900-PLATE-S-BK
41260-D	SES-WL900-PLATE-L-BK

41260-B



2' Back Plate

41260-D



4', 6', 8' Back Plate